

# SP9680

## ULTRA FAST COMPARATOR

The SP9680 is an ultra fast comparator manufactured using a high performance bipolar process which makes possible very short propagation delays (2.4ns typ.).

The circuit has differential inputs and complementary ECL outputs, capable of driving 50 Ω lines.

The device is manufactured in a low cost mini-dip package and is intended as an alternative to the faster SP9685 in applications where performance premium and the latch facility are not required.

### FEATURES

- Propagation Delay 2.4ns Typ.
- Complementary ECL Outputs
- 50 Ω Line Driving Capability
- Excellent Common Mode Rejection
- 8-Lead Plastic Package
- Supply Voltages +5, -5.2V
- Operating Temperature Range -30°C to +70°C

### ORDERING INFORMATION

**SP9680DP** (Industrial - Plastic DIL package)

**SP9680MP** (Industrial - Miniature Plastic package)

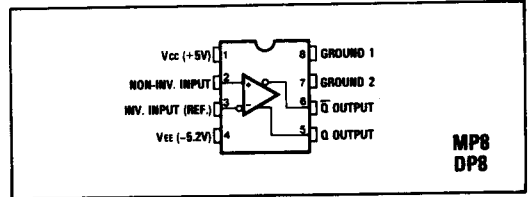


Fig. 1 Pin connections

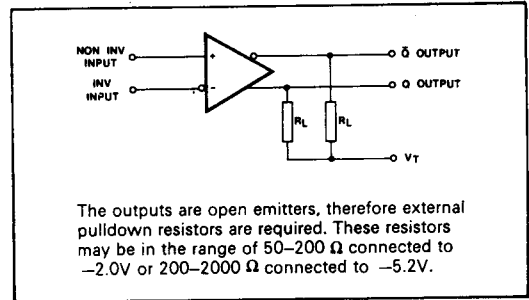


Fig. 2 Functional diagram

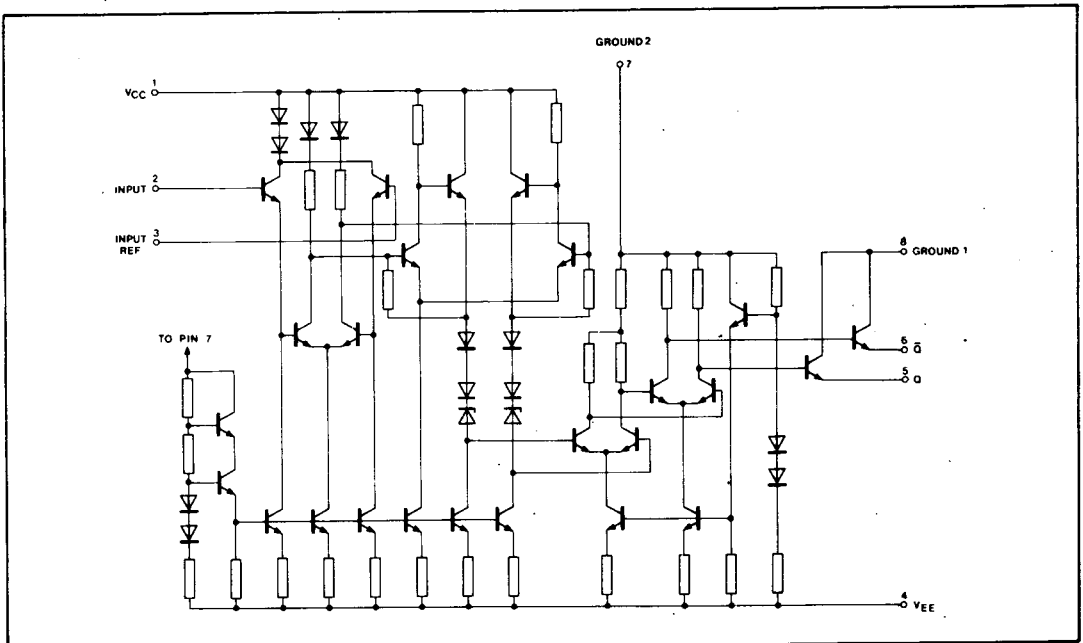


Fig. 3 SP9680 circuit diagram

**ELECTRICAL CHARACTERISTICS**

Test conditions (unless otherwise stated):

- T<sub>amb</sub> = 25 °C
- V<sub>CC</sub> = 5.00V 0.25V
- V<sub>EE</sub> = -5.2V 0.25V
- R<sub>L</sub> = 50 Ω
- V<sub>T</sub> = -2.0V (See Fig. 2)

Characteristic	Value			Units	Conditions
	Min.	Typ.	Max.		
Input offset voltage	-6		+6	mV	R <sub>s</sub> < 100 Ω  } 100mV pulse, 10mV overdrive
Input bias current		20	40	μA	
Input offset current			10	μA	
Supply current I <sub>CC</sub>		18	25	mA	
I <sub>EE</sub>		22	35	mA	
Total power dissipation		200	300	mW	
Input to Q output delay		2.4	4	ns	
Input to Q̄ output delay		2.4	4	ns	
Common mode range	-2		+2	V	
Common mode rejection ratio		80		dB	
Output logic levels					
Output HIGH	-0.96		-0.81	V	
Output LOW	-1.85		-1.65	V	
Input capacitance		3.5		pF	
Input resistance				kΩ	
Operating temperature range	50		+70	°C	

Thermal characteristics

$\theta_{JA} = 111^{\circ}\text{C/W}$   
 $\theta_{JC} = 71^{\circ}\text{C/W}$

**ABSOLUTE MAXIMUM RATINGS**

- Positive supply voltage V<sub>CC</sub> +6V
- Negative supply voltage V<sub>EE</sub> -6V
- Output current 30mA
- Input voltage ±3V
- Differential input voltage 3.5V
- Storage temperature range -55°C to +150°C
- Operating junction temperature <150°C