




Pin Type PK-35A29EPQ, PF-35A29EPQ, PL-35A29EPQ

Dimensions and material

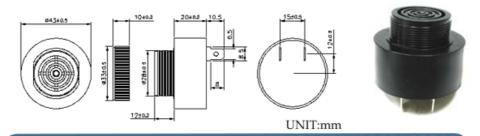

Electrical Characteristics

Model Number	PK-35A29EPQ	PF-35A29EPQ	PL-35A29EPQ	Unit
Resonant Frequency		2.9 ± 0.5		KHz
Operating Voltage		3.0~24		VDC
Rated Voltage		12		VDC
Sound Pressure Level(Min)	95 at 30cm at Rated Voltage			dB
Current Consumption(Max)	10 at Rated Voltage			mA
Tone Sweep(Pulse)Rate at Rated Voltage(Hz) ± 20 %	Constant	Fast Pulse 3.0	Slow Pulse 1.2	
Operating Temperature		-20 ~ +70		${\mathcal C}$
Storage Temperature		-30 ~ +80		${}^{\mathbf{c}}$

Voltage/Current/Sound Pressure

