


# Fast-Acting 5mm x 25mm Ferrule Fuses

# GCF Series



### Dimensional Data

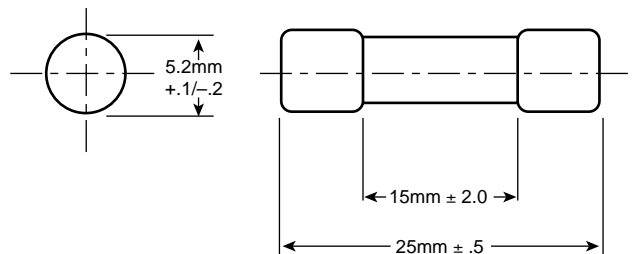

Catalog Symbol: GCF Series

Fast-Acting

DIN 41576-1

Voltage Rating: 250 Volts AC

Interrupting Rating: 300A

Opening Times: 1 hour minimum at 150% of rated current

30 minutes maximum at 210% of rated current

300 milliseconds maximum at 400% of rated current

20 milliseconds maximum at 1000% of rated current

Physical Size: 5mm x 25mm

Construction: Ceramic tube

Nickel-plated brass end caps

Part Number	Amperage	Max. Voltage Drop at 100% rating (mV)	Total Clearing I <sup>2</sup> t at 10 times rating (A <sup>2</sup> S)
GCF-1.6A	1.6	640	1.64
GCF-2A	2	420	8.00
GCF-3.15A	3.15	250	18.85
GCF-4A	4	200	30.40
GCF-5A	5	180	47.00
GCF-6.3A	6.3	170	79.38

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.