

GI8550

PNP EPITAXIAL TRANSISTOR

Description


The GI8550 is designed for use in 2W output amplifier of portable radios in class B push-pull operation.

Features

*High Collector current (IC: 1.5A)

*Complementary to GI8050

Package Dimensions

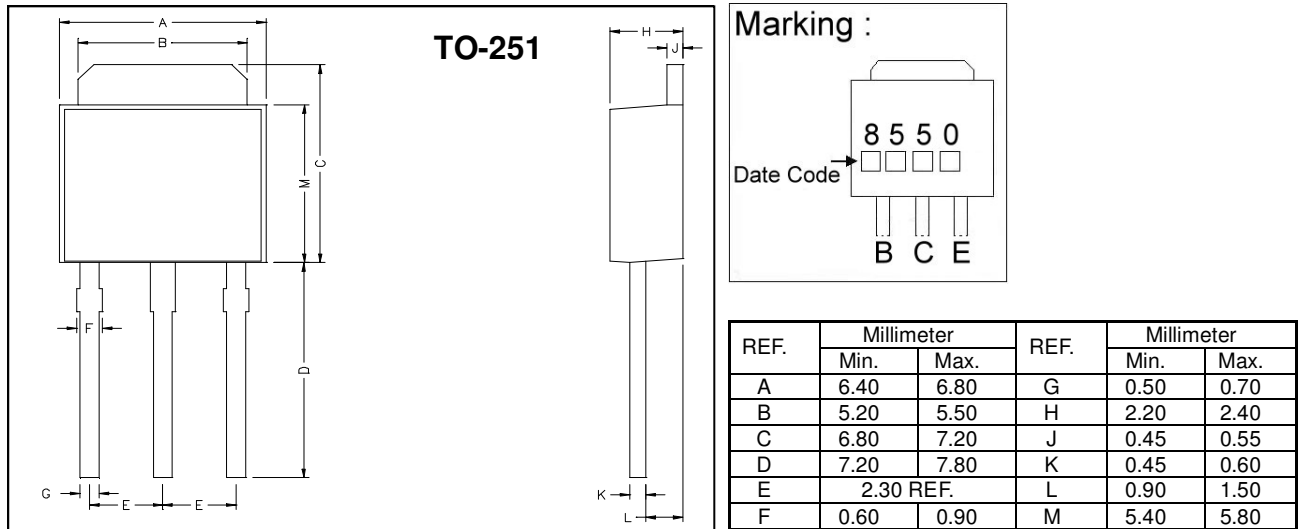

Absolute Maximum Ratings (Ta = 25°C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	V _{CB0}	-40	V
Collector to Emitter Voltage	V _{CEO}	-25	V
Emitter to Base Voltage	V _{EBO}	-6	V
Collect Current	I _C	-1.5	A
Base Current	I _B	-0.5	A
Junction Temperature	T _j	+150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C
Total Power Dissipation	P _D	1.25	W

Electrical Characteristics (Ta = 25°C, unless otherwise specified)







Symbol	Min.	Typ.	Max.	Unit	Test Conditions
V _{CB0}	-40	-	-	V	I _C = -100μA
V _{CEO}	-25	-	-	V	I _C = -2mA
V _{EBO}	-6	-	-	V	I _E = -100μA
I _{CB0}	-	-	-100	nA	V _{CB} = -35V
I _{EBO}	-	-	-100	nA	V _{BE} = -6V
*V _{CE(sat)}	-	-	-0.5	V	I _C = -800mA, I _B = -80mA
*V _{BE(sat)}	-	-	-1.2	V	I _C = -800mA, I _B = -80mA
*V _{BE(on)}	-	-	-1	V	V _{CE} = -1V, I _C = -10mA
*h _{FE1}	45	-	-		V _{CE} = -1V, I _C = -5mA
*h _{FE2}	120	-	500		V _{CE} = -1V, I _C = -100mA
*h _{FE3}	40	-	-		V _{CE} = -1V, I _C = -800mA
f _T	100	-	-	MHz	V _{CE} = -10V, I _C = -50mA, f = 100MHz
C _{ob}	-	9	-	pF	V _{CB} = -10V, I _E = 0, f = 1MHz

* Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%

Classification Of h_{FE2}

Rank	C	D	E
Range	120 ~ 200	160 ~ 300	250 ~ 500

Characteristics Curve

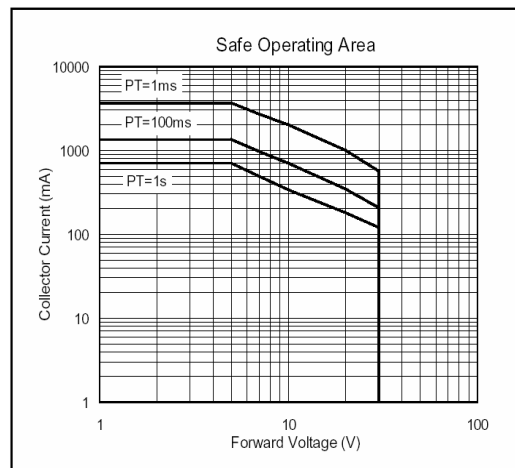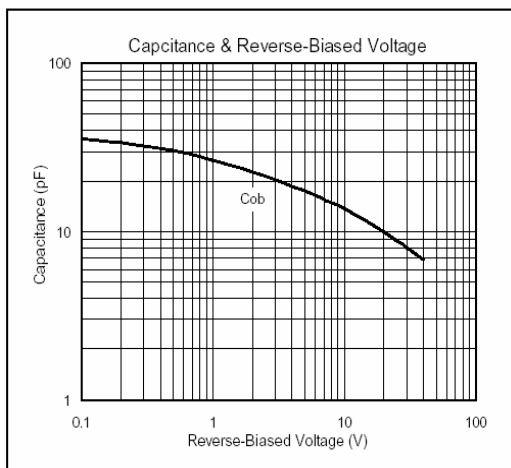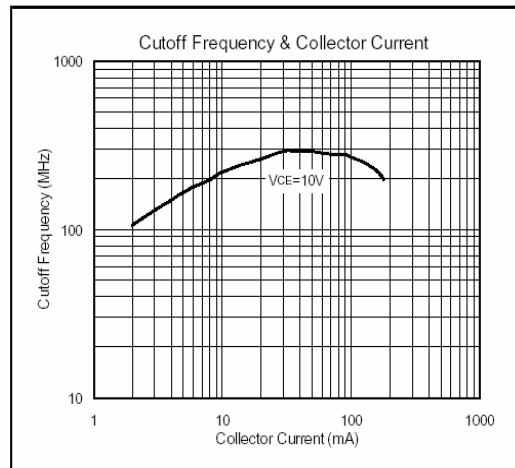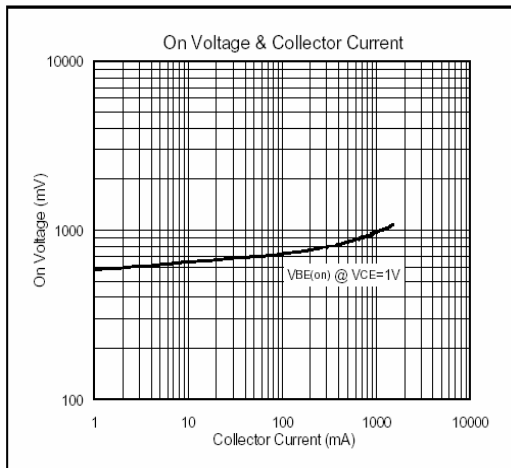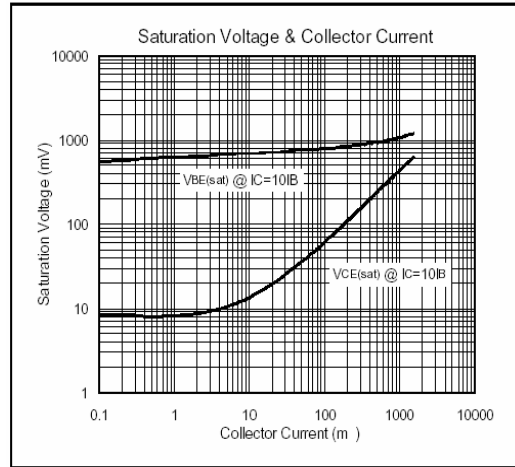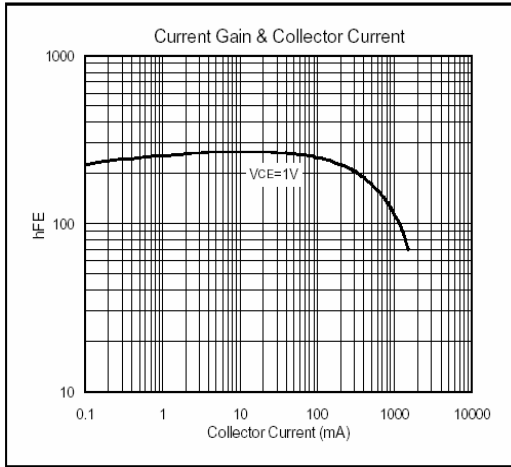

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
- TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
- TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165