

**SOT-23**

**Pin Definition:**

1. Ground
2. Output
3. Input

**SOT-89**

**Pin Definition:**

1. Ground
2. Input
3. Output

**TO-92**

**Pin Definition:**

1. Ground
2. Input
3. Output

## General Description

TS9011 is a positive voltage regulator developed utilizing CMOS technology featured very low power consumption, low dropout voltage and high output voltage accuracy. Built in low on-resistor provides low dropout voltage and large output current. A 1uF or greater can be used as an output capacitor. TS9011 are prevented device failure under the worst operation condition with both thermal shutdown and current fold-back. These series are recommended for configuring portable devices and large current application, respectively.


## Features

- Dropout Voltage Typically 0.4V@  $I_o=200mA$  ( $V_o=5V$ )
- Output Current up to 250mA
- Low Power Consumption, 2uA(typ) @  $V_o=5V$
- Output Voltage  $\pm 2\%$
- Internal Current Limit
- Thermal Shutdown Protection

## Applications

- Battery-operated systems
- Microprocessor reset circuitry
- Memory battery back-up circuits
- Power-on reset circuits
- Power failure detection
- System battery life and charge voltage monitors

## Block Diagram

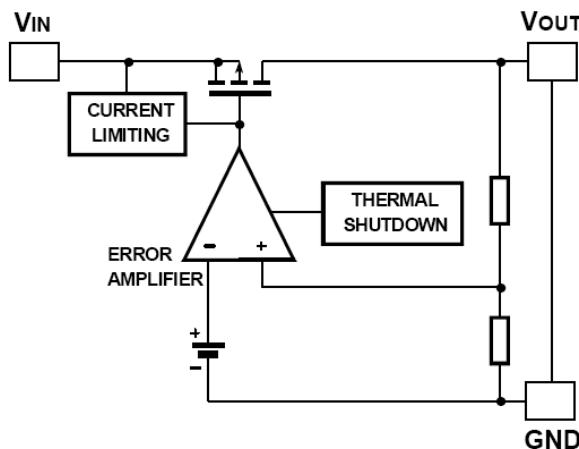

## Ordering Information

| Part No.     | Package | Packing         |
|--------------|---------|-----------------|
| TS9011xCX RF | SOT-23  | 3Kpcs / 7" Reel |
| TS9011xCY RM | SOT-89  | 1Kpcs / 7" Reel |
| TS9011xCT A3 | TO-92   | 2Kpcs / Ammo    |
| TS9011xCT B0 | TO-92   | 1Kpcs / Bulk    |

Note: Where x denotes voltage option, available are

**A=1.5V**

**D=1.8V**

**K=2.5V**


**P=3.0V**

**S=3.3V**

**5=5V**

Contact factory for additional voltage options.

## Typical Application Circuit

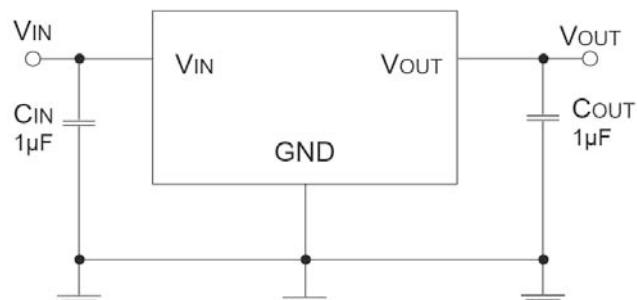

\* Tantalum capacitor for Input & Output capacitor are recommended

### Absolute Maximum Rating

| <b>Parameter</b>                         | <b>Symbol</b>    | <b>Limit</b>   | <b>Unit</b> |
|--|------------------|--|-------------|
| Input Supply Voltage                     | V <sub>IN</sub>  | 12   | V           |
| Output Current                           | I <sub>O</sub>   | P <sub>D</sub> / (V <sub>IN</sub> - V <sub>O</sub> ) | V           |
| Power Dissipation                        | SOT-23           | P <sub>D</sub>                                       | W           |
|  | SOT-89           |  |             |
|  | TO-92            |  |             |
| Thermal Resistance - Junction to Ambient | SOT-23           | R <sub>ΘJA</sub>                                     | °C/W        |
|  | SOT-89           |  |             |
|  | TO-92            |  |             |
| Operating Ambient Temperature            | T <sub>OPR</sub> | -40 ~ +85  | °C          |
| Junction Temperature Range               | T <sub>J</sub>   | -40 ~ +150   | °C          |
| Storage Temperature Range                | T <sub>STG</sub> | -65 ~ +150   | °C          |

Notes: Stress above the listed absolute rating may cause permanent damage to the device.

### Electrical Characteristics (Ta = 25°C, unless otherwise noted)

| <b>Parameter</b>                                | <b>Conditions</b>  |         | <b>Min</b> | <b>Typ</b> | <b>Max</b> | <b>Unit</b> |  |
|---|--|---------|------------|------------|------------|-------------|--|
| Output Voltage                                  | V <sub>IN</sub> =V <sub>O</sub> + 1V,<br>I <sub>O</sub> =40mA,                 | TS90115 | 4.90       | 5.0        | 5.10       | V           |  |
|   |  | TS9011S | 3.23       | 3.3        | 3.36       |             |  |
|   |  | TS9011P | 2.94       | 3.0        | 3.06       |             |  |
|   |  | TS9011K | 2.45       | 2.5        | 2.55       |             |  |
|   |  | TS9011D | 1.76       | 1.8        | 1.83       |             |  |
|   |  | TS9011A | 1.47       | 1.5        | 1.53       |             |  |
| Maximum Output Current                          | V <sub>IN</sub> =V <sub>O</sub> +1V,   |         | 250        | --         | --         | mA          |  |
| Input Stability                                 | V <sub>O</sub> +1V ≤ V <sub>IN</sub> ≤ V <sub>O</sub> +2V, I <sub>O</sub> =1mA |         | --         | 0.2        | 0.3        | %           |  |
| Load Regulation (Note 1)                        | V <sub>IN</sub> =V <sub>O</sub> +1V,<br>1mA≤I <sub>L</sub> ≤100mA              | TS90115 | --         | 40         | 80         | mV          |  |
|   |  | TS9011S |            |            |            |             |  |
|   | V <sub>IN</sub> =V <sub>O</sub> +1V,<br>1mA≤I <sub>L</sub> ≤80mA               | TS9011P | --         | 40         | 90         |             |  |
|   |  | TS9011K |            |            |            |             |  |
|   |  | TS9011D |            |            |            |             |  |
|   |  | TS9011A |            |            |            |             |  |
| Dropout Voltage (Note 2)                        | I <sub>O</sub> =250mA  | TS90115 | --         | 400        | 600        | mV          |  |
|   | I <sub>O</sub> =200mA  | TS9011S | --         | 400        | 650        |             |  |
|   | I <sub>O</sub> =160mA  | TS9011P | --         | 400        | 700        |             |  |
|   | I <sub>O</sub> =160mA  | TS9011K | --         | 400        | 700        |             |  |
|   | I <sub>O</sub> =120mA  | TS9011D | --         | 400        | 750        |             |  |
|   | I <sub>O</sub> =100mA  | TS9011A | --         | 850        | 1000       |             |  |
| Quiescent Current                               | V <sub>IN</sub> =V <sub>O</sub> +1V, I <sub>O</sub> =0A                        |         | --         | 2          | 5          | uA          |  |
| Output Current Limit                            | V <sub>OUT</sub> < 0.4V  |         | --         | 400        | --         | mA          |  |
| Power Supply Rejection Ratio                    | At f=100KHz, I <sub>O</sub> =10mA,   |         | --         | 30         | --         | dB          |  |
| Output Voltage Temperature Coefficient (Note 3) |  |         | --         | 100        | --         | ppm/°C      |  |

#### Notes:

1. Regulation is measured at constant junction temperature, using pulsed ON time.
2. Dropout is measured at constant junction temperature, using pulsed ON time, and the criterion is V<sub>OUT</sub> inside target value +/-2%.
3. Guaranteed by design.

**Electrical Characteristics Curve** ( $T_a = 25^\circ\text{C}$ , unless otherwise noted)

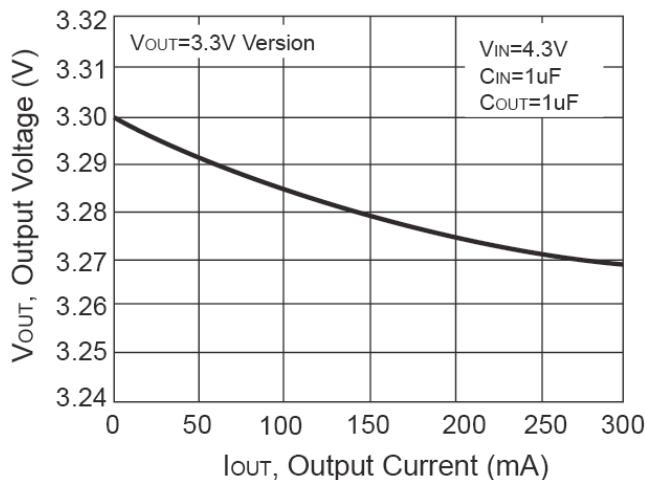


Figure 1. Output Voltage vs. Output Current

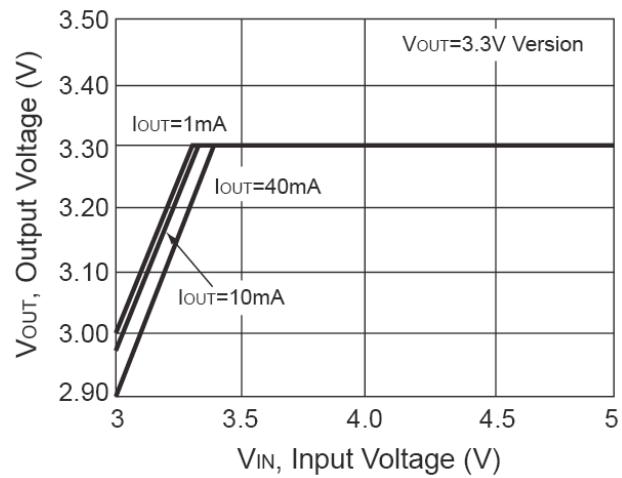


Figure 2. Output Voltage vs. Input Voltage

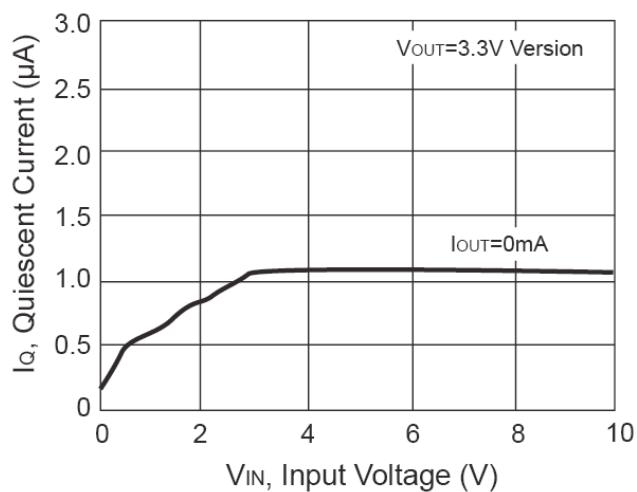


Figure 3. Quiescent Current vs. Input Voltage


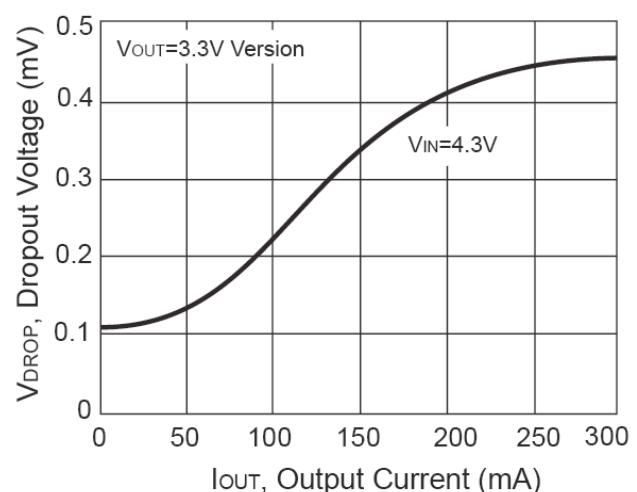



Figure 4. Short Circuit Current vs. Input Voltage

## TO-92 Mechanical Drawing

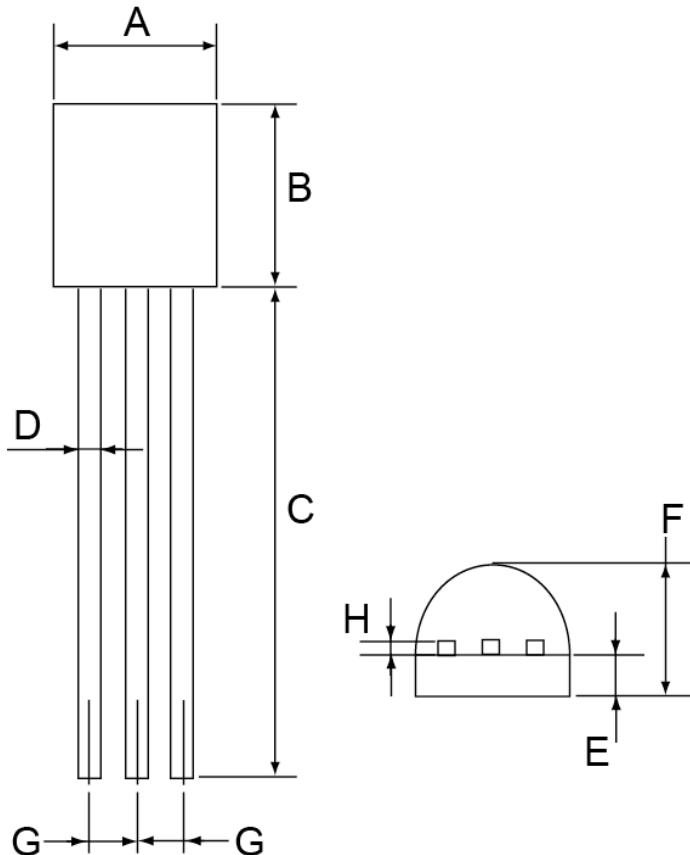

| TO-92 DIMENSION |             |      |             |       |
|-----------------|-------------|------|-------------|-------|
| DIM             | MILLIMETERS |      | INCHES      |       |
|                 | MIN         | MAX  | MIN         | MAX   |
| A               | 4.30        | 4.70 | 0.169       | 0.185 |
| B               | 4.30        | 4.70 | 0.169       | 0.185 |
| C               | 13.53 (typ) |      | 0.532 (typ) |       |
| D               | 0.39        | 0.49 | 0.015       | 0.019 |
| E               | 1.18        | 1.28 | 0.046       | 0.050 |
| F               | 3.30        | 3.70 | 0.130       | 0.146 |
| G               | 1.27        | 1.31 | 0.050       | 0.051 |
| H               | 0.33        | 0.43 | 0.013       | 0.017 |

## Marking Diagram

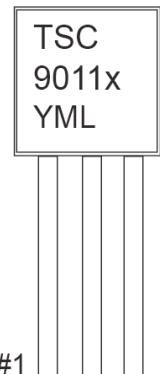

**Y** = Year Code

**M** = Month Code

(A=Jan, B=Feb, C=Mar, D=Apl, E=May, F=Jun, G=Jul, H=Aug,


I=Sep, J=Oct, K=Nov, L=Dec)

**L** = Lot Code

**X** = Fixed Output Voltage Code


A=1.5V, D=1.8V, K=2.5V, P=3.0V, S=3.3V, 5=5.0V.

### SOT-89 Mechanical Drawing

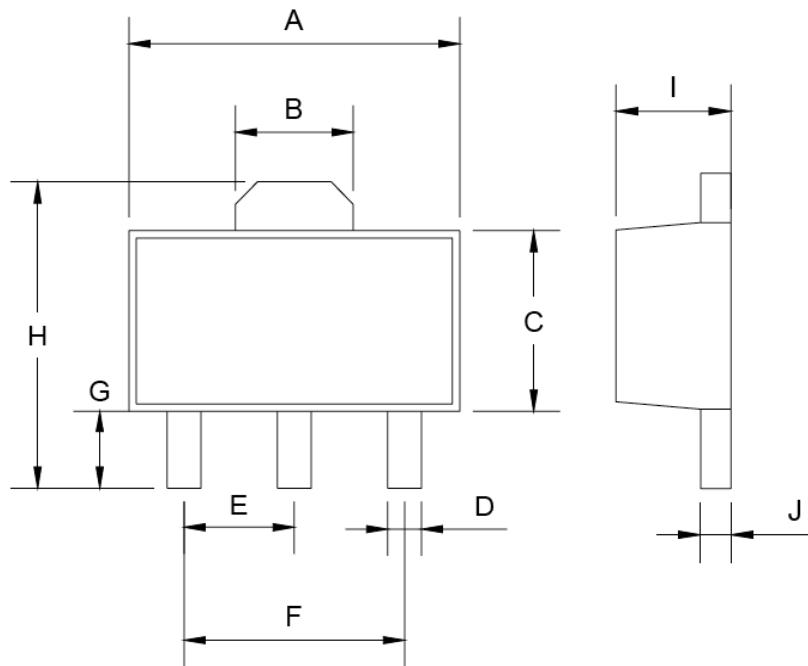

| SOT-89 DIMENSION |             |      |        |       |
|------------------|-------------|------|--------|-------|
| DIM              | MILLIMETERS |      | INCHES |       |
|                  | MIN         | MAX  | MIN    | MAX   |
| A                | 4.40        | 4.60 | 0.173  | 0.181 |
| B                | 1.40        | 1.75 | 0.055  | 0.069 |
| C                | 2.40        | 2.60 | 0.094  | 0.102 |
| D                | 0.36        | 0.48 | 0.014  | 0.018 |
| E                | 1.40        | 1.60 | 0.054  | 0.063 |
| F                | 2.90        | 3.10 | 0.114  | 0.122 |
| G                | 0.89        | 1.20 | 0.035  | 0.047 |
| H                | --          | 4.25 | --     | 0.167 |
| I                | 1.40        | 1.60 | 0.055  | 0.068 |
| J                | 0.38        | 0.43 | 0.014  | 0.017 |

### Marking Diagram

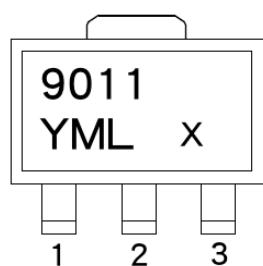

**Y** = Year Code

**M** = Month Code


(**A**=Jan, **B**=Feb, **C**=Mar, **D**=Apr, **E**=May, **F**=Jun, **G**=Jul, **H**=Aug,  
**I**=Sep, **J**=Oct, **K**=Nov, **L**=Dec)

**L** = Lot Code

**X** = Fixed Output Voltage Code


**A**=1.5V, **D**=1.8V, **K**=2.5V, **P**=3.0V, **S**=3.3V, **5**=5.0V.

### SOT-23 Mechanical Drawing

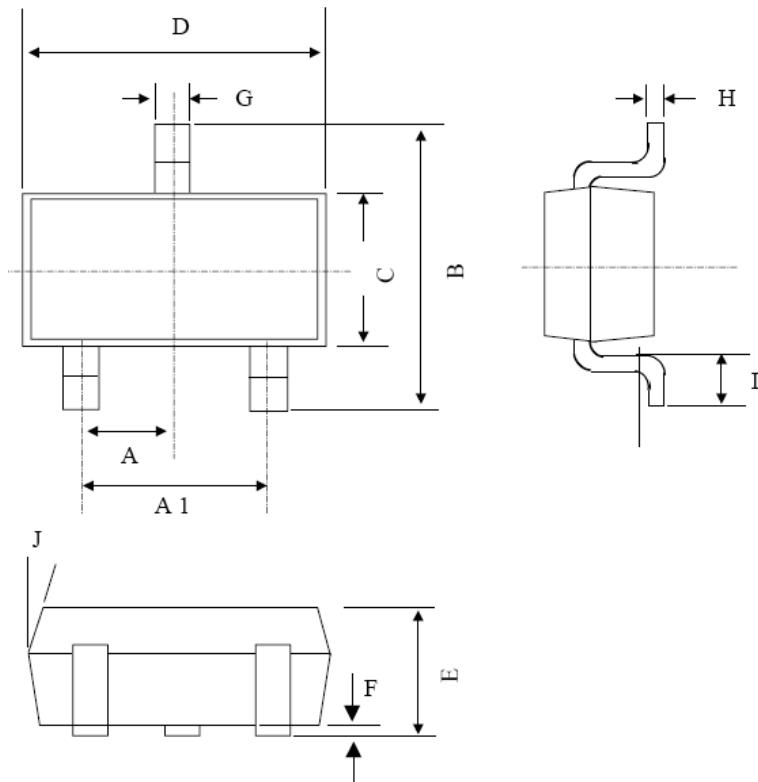

| SOT-23 DIMENSION |             |      |           |       |
|------------------|-------------|------|-----------|-------|
| DIM              | MILLIMETERS |      | INCHES    |       |
|                  | MIN         | MAX  | MIN       | MAX.  |
| A                | 0.95 BSC    |      | 0.037 BSC |       |
| A1               | 1.9 BSC     |      | 0.074 BSC |       |
| B                | 2.60        | 3.00 | 0.102     | 0.118 |
| C                | 1.40        | 1.70 | 0.055     | 0.067 |
| D                | 2.80        | 3.10 | 0.110     | 0.122 |
| E                | 1.00        | 1.30 | 0.039     | 0.051 |
| F                | 0.00        | 0.10 | 0.000     | 0.004 |
| G                | 0.35        | 0.50 | 0.014     | 0.020 |
| H                | 0.10        | 0.20 | 0.004     | 0.008 |
| I                | 0.30        | 0.60 | 0.012     | 0.024 |
| J                | 5°          | 10°  | 5°        | 10°   |

### Marking Diagram

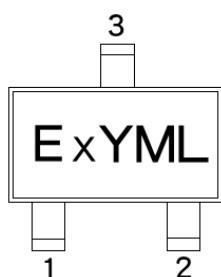

**E** = Product Code  
**Y** = Year Code  
**M** = Month Code  
 (A=Jan, B=Feb, C=Mar, D=Apl, E=May, F=Jun, G=Jul, H=Aug,  
 I=Sep, J=Oct, K=Nov, L=Dec)  
**L** = Lot Code  
**X** = Fixed Output Voltage Code  
 A=1.5V, D=1.8V, K=2.5V, P=3.0V, S=3.3V, 5=5.0V.

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.