




GBAT34

Description
Schottky Diode .

Package Dimensions

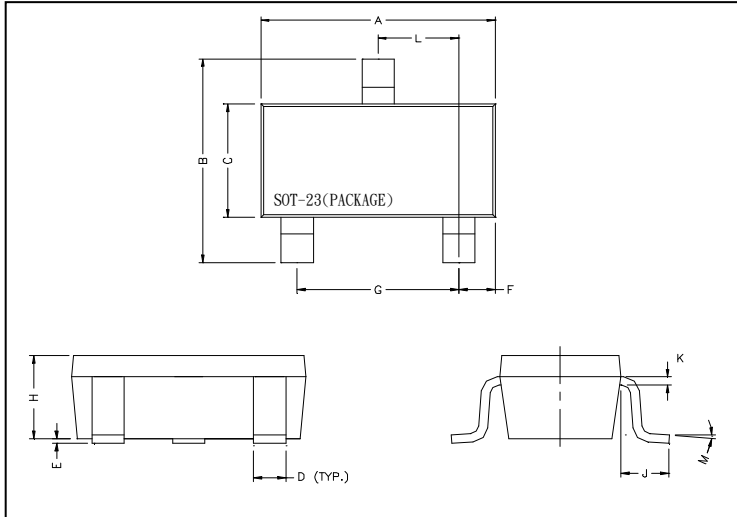

Style : Pin 1.Anode 2.Cathode 3.Common Connection

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.70	3.10	G	1.90	REF.
B	2.40	2.80	H	1.00	1.30
C	1.40	1.60	K	0.10	0.20
D	0.35	0.50	J	0.40	-
E	0	0.10	L	0.85	1.15
F	0.45	0.55	M	0°	10°

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Peak forward current		200	mA
Recurrent Peak Reverse Voltage	VRRM	30	V
RMS Voltage	VRMS	21	V
DC Blocking Voltage	VDC	30	V
Average Forward Rectified Current	Io	100	mA
Peak Forward Surge Current at 1 Sec	IFSM	600	mA
Typical Junction Capacitance between Terminal(note 1)	CJ	10	pF
Reverse Recovery Time(Note 2)	TRR	5.0	nSec
Operating Temperature Range	TJ	+150	°C
Storage Temperature	Tstg	-55 ~ +150	°C
Total Power Dissipation at Ta = 25°C	PD	150	mW

Characteristics at Ta = 25°C

characteristics	Symbol	Min	Max.	Unit	Test Conditions
Maximum Instantaneous Forward Voltage	VF	-	1000	mV	IF=100mA
Maximum Average Reverse Current	IR	-	2.0	uA	VR=25V

Note: 1.Measured at 1.0 MHz and applied reverse voltage of 1.0 volts.

2.Measured at applied forward current of 10 mA and reverse current of 10 mA.

3.ESD sensitive product handling required.

Characteristics Curve

FIG. 1 - FORWARD CHARACTERISTICS

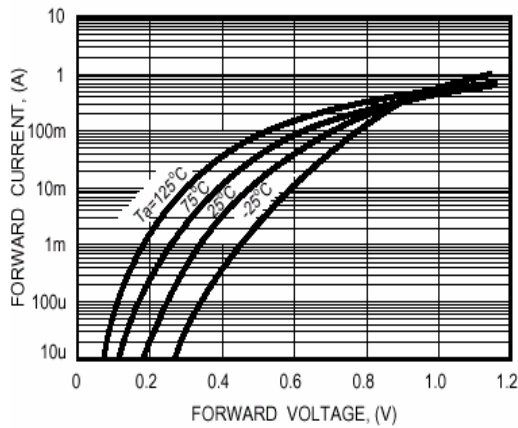


FIG. 2 - REVERSE CHARACTERISTICS

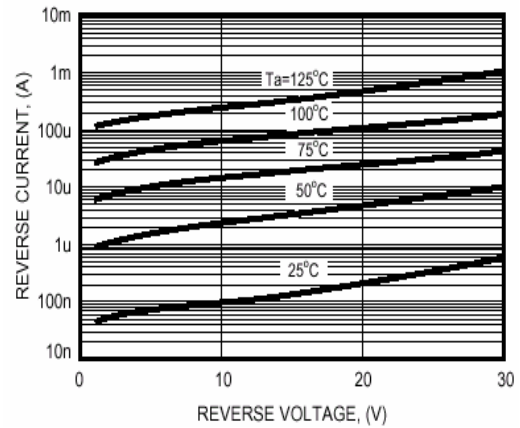


FIG. 3 - TYPICAL JUNCTION CAPACITANCE


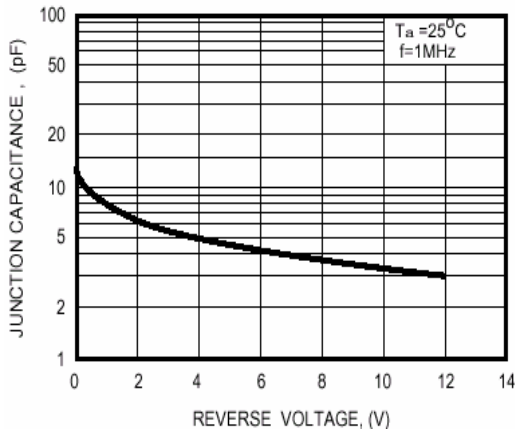


FIG. 4 - TYPICAL FORWARD CURRENT DERATING CURVE

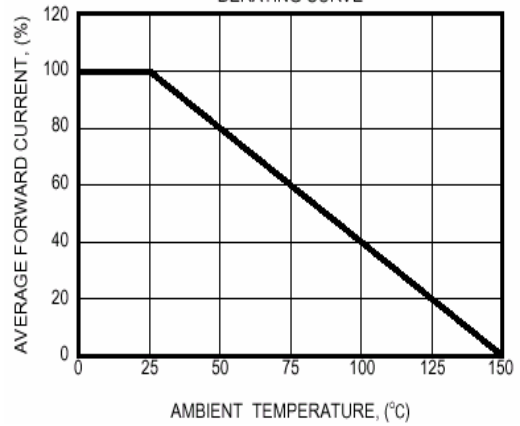

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 FAX : 86-21-38950165