



## ZERO OHM INSULATED JUMPER WIRES J - Z

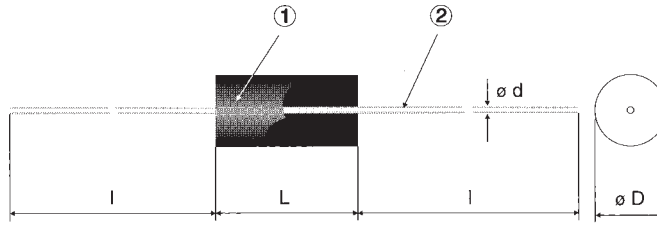

### STRUCTURE

- 1 Insulator (black polyolefin)
- 2 Solder plated copper wire



### IDENTIFICATION

PRODUCT CODE	COATING COLOR	MARKING
J 1/6Z	Black	None
J 1/4Z		

Products with Pb-free terminations meet RoHS requirements

### TYPE DESIGNATION (HOW TO ORDER)

Old Part No.	<b>J</b>	<b>1/4Z</b>		<b>T52</b>	<b>A</b>
New Part No. (Pb-free)	<b>J</b>	<b>1/4Z</b>	<b>C</b>	<b>T52</b>	<b>A</b>
	PRODUCT CODE	STYLE	TERMINATION SURFACE MATERIAL C: SnCu L: Sn/Pb	TAPING & FORMING	PACKAGING A: Ammo R: Reel
				*Please see "PACKAGING"	

### DIMENSIONS (mm)

TYPE	L*	D	I*	d (nominal)
J 1/6Z	3.4 <sup>+0.1</sup> / <sub>-0.2</sub>	1.7 ± 0.2	30 ± 3	0.5
J 1/4Z	6.5 ± 0.5	2.3 <sup>+0</sup> / <sub>-0.3</sub>		0.6

\*Dimensions "L" and "I" can be changed on request

### FEATURES

- Automatic insertion is applicable
- Higher allowable current than Z-series
- Rated ambient temperature: +70°C
- Operating temperature range: -55°C...+125°C

### RATING

DIN SIZE	TYPE	MAX. ALLOWABLE CURRENT	RESISTANCE
0204	J 1/6Z	8 A	10mΩ Max.
0207	J 1/4Z	10 A	

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.