
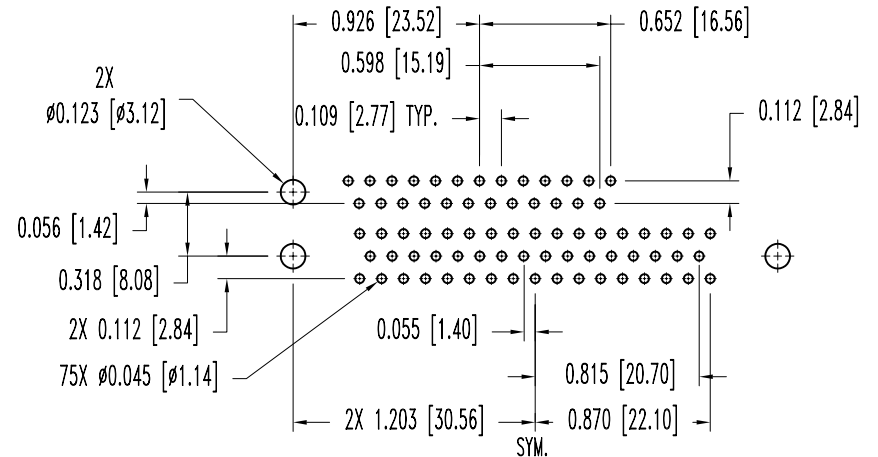
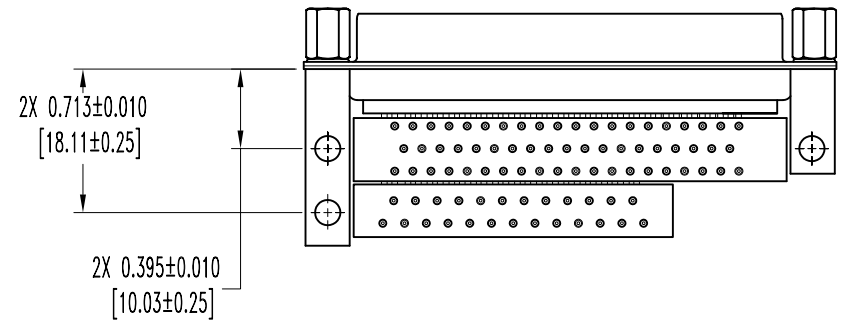
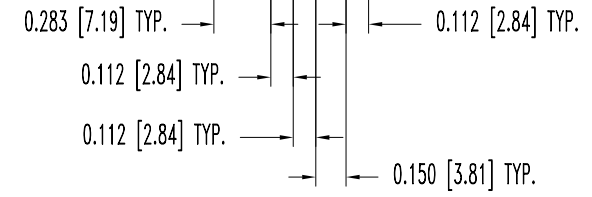



SK7922

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
8-28-06	NC	ECO 26584		YK	

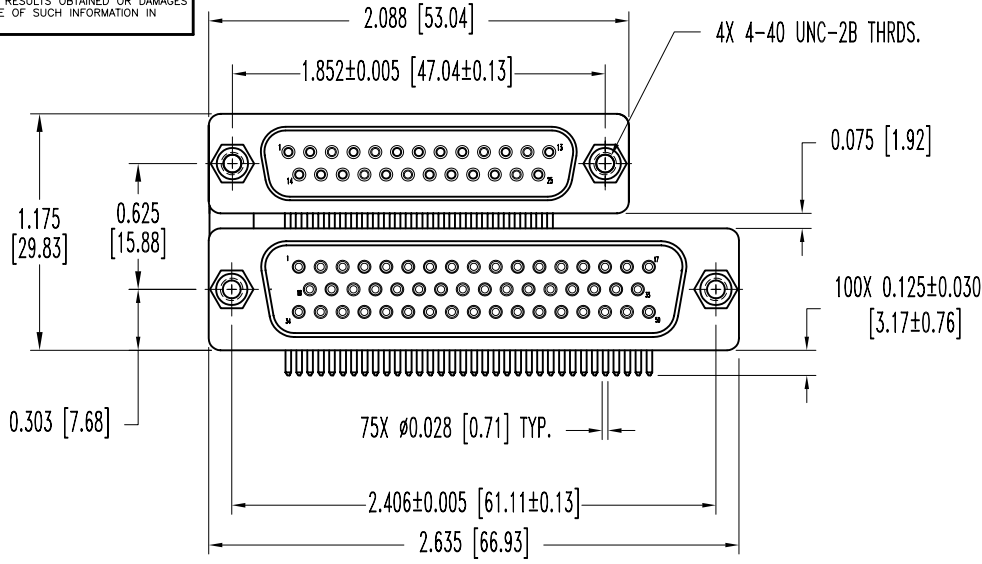

- NOTES:
- MATERIALS AND FINISHES:
 INSULATORS: NYLON RESIN UL 94V-0, BLACK COLOR.
 CONTACTS: PRECISION MACHINED BRASS ALLOY, GOLD FLASH OVER NICKEL PLATED.
 SHELLS: STAINLESS STEEL, PASSIVATED.
 MOUNTING BRACKETS: BRASS, ZINC PLATE WITH CHROMATE SEAL.
 ALIGNMENT BAR: NYLON RESIN, UL 94V-0, BLACK COLOR.
 JACKSCREWS: STEEL, ZINC PLATE WITH CROMATE SEAL.
 - ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 5 AMPERES NOMINAL.
 INITIAL CONTACT RESISTANCE: 0.008 OHMS MAXIMUM.
 INSULATOR RESISTANCE: 5 G OHMS.
 WORKING VOLTAGE: 300 V r.m.s.
 - TEMPERATURE RANGE: -55°C TO +125°C.
 - DIMENSIONS ARE IN INCHES [MILLIMETERS].

CONTACT HOLE PATTERN

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com	
	DECIMAL TOL. ± 0.015 [0.38]	SCALE N.T.S.
DPA SERIES	DRAWN BY YK	APPROVED BY
TITLE DPA25MR8T2/50MR8T2S	DATE 8-28-06	DRAWING NUMBER SK7922
ANGULAR TOL. ± 5°	REV. NC	