


LED Displays ~ Seven Segment ~ Numeric



Five Digit

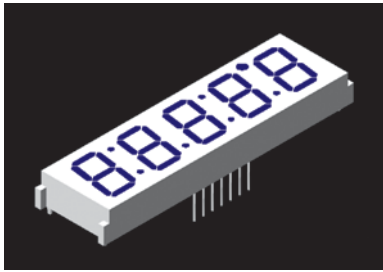


Features/Options

- ▶ Standard and high brightness chips
- ▶ Intensity grading available
- ▶ Custom sizes at minimal tooling
- ▶ Face and segment off colors in grey and milky white

Applications/Uses

- ▶ Panel meter displays
- ▶ Time lapsed panels
- ▶ Diagnostic equipment
- ▶ Counter displays

0.56" five digit

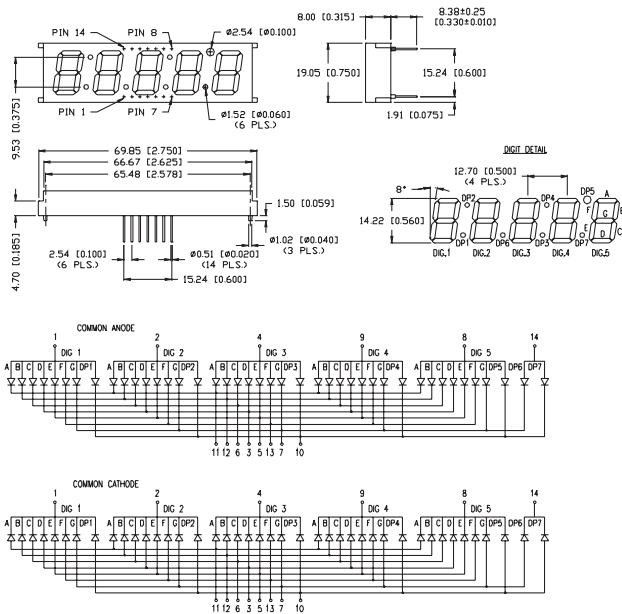

| Part Number | Wave Length (nm) | Brightness (μcd @ 10mA) | Vf (typ) 10mA | Vf (max) 10mA | Emitted Color | Polarity (common) |
|----------------|------------------|-------------------------|---------------|---------------|---------------|-------------------|
| LDP-M562RI | 565 | 2500 | 2.2 | 2.6 | Green | Anode |
| LDP-M564RI | 635 | 2500 | 2.0 | 2.5 | Red | Anode |
| LDP-M566RI | 660 | 8000 | 1.7 | 2.2 | Red | Anode |
| LDP-M562RI-SUG | 574 | 7000 | 2.2 | 2.6 | Green | Anode |
| LDP-M564RI-SI | 636 | 15,000 | 2.0 | 2.6 | Red | Anode |
| LDP-M567RI-USB | 470 | 6000 | 3.5 | 4.0 | Blue | Anode |
| LDP-N562RI | 565 | 2500 | 2.2 | 2.6 | Green | Cathode |
| LDP-N564RI | 635 | 2500 | 2.0 | 2.5 | Red | Cathode |
| LDP-N566RI | 660 | 8000 | 1.7 | 2.2 | Red | Cathode |
| LDP-N562RI-SUG | 574 | 7000 | 2.2 | 2.6 | Green | Cathode |
| LDP-N564RI-SI | 636 | 15,000 | 2.0 | 2.6 | Red | Cathode |
| LDP-N567RI-USB | 470 | 6000 | 3.5 | 4.0 | Blue | Cathode |

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26
- 27
- 28
- 29



USA/Canada +1-800-278-5666
Europe +49-6081-964380
Asia +886-3-5821124



www.lumex.com



USA/Canada +1-847-359-8904
Europe +49-6081-964381
Asia +886-3-5821154