


Dual Operational Amplifier

DESCRIPTION


The TA4558 is a high performance monolithic dual operational amplifier

FEATURES

- No frequency compensation required
- No latch -up
- Large common mode and differential voltage range
- Parameter tracking over temperature range
- Gain and phase match between amplifiers
- Internally frequency compensated
- Low noise input transistors
- Pin to pin compatible with MC1458 / LM358

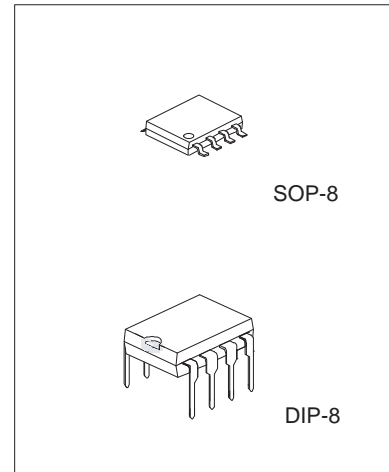


BLOCK DIAGRAM (ONE SECTION ONLY)

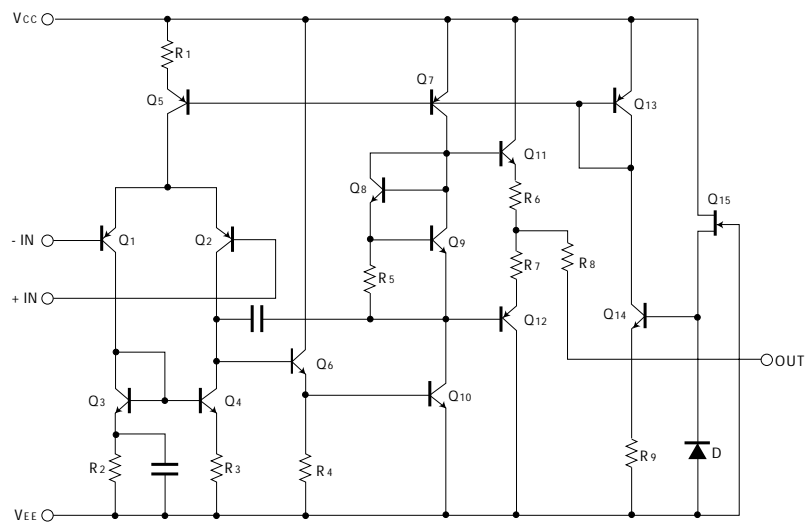

www.DataSheet4U.com

PIN CONFIGURATION

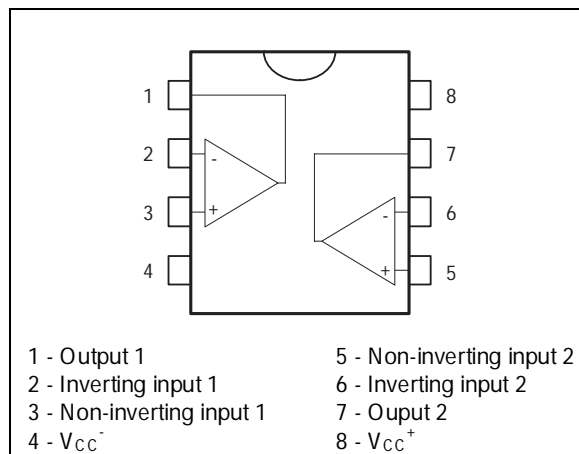

TA4558

ORDERING INFORMATION

Device	Operating Temperature Range	Package
TA4558	$T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$	PDIP-8
TA4558	$T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$	SOP-8

MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	V_{CC}	± 22	V
Differential Input Voltage	$V_I(\text{DIFF})$	± 18	V
Input Voltage	V_I	± 15	V
Operating Temperature	TOPR	0 ~ +70	$^\circ\text{C}$
Power Dissipation	P_D	600 400	mW
Storage Temperature Range	TSTG	-65 ~ +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($V_{CC}=15.0\text{V}$, $V_{EE}=-15\text{V}$, $T_A=25^\circ\text{C}$, unless otherwise specified)









PARAMETER	SYMBOL	TEST CONDUCTION	MIN	TYP	MAX	UNIT
Supply Current, all Amp, no load	I_{CC}			2.3	4.5	mA
Input offset voltage	V_{IO}	$R_s < 10\text{k}$		2	6	mV
Input offset current	I_{IO}			5	200	nA
Input bias current	I_{BIAS}			30	500	nA
Large signal voltage gain	G_v	$V_o(\text{p-p}) = \pm 10\text{V}$, $R_L = 2\text{k}$	20	200		V/mV
Common Mode Input Voltage Range	$V_{I(R)}$		± 12	± 13		V
Common Mode Rejection Ratio	CMRR	$R_s = 10\text{k}$	70	90		dB
Supply Voltage Rejection Ratio	PSRR	$R_s = 10\text{k}$	76	90		dB
Output Voltage swing	$V_o(\text{p-p})$	$R_L = 10\text{k}$		± 12	± 14	V
Power Consumption	P_c			70	170	mW
Slew Rate	SR	$V_i = \pm 10\text{V}$, $R_L = 2\text{k}$, $C_L = 100\text{pF}$	1.2	2.2		V/ μs
Rise Time	T_{RIS}	$V_i = \pm 20\text{mV}$, $R_L = 2\text{k}$, $C_L = 100\text{pF}$		0.3		μs
Overshoot	OS	$V_i = \pm 20\text{mV}$, $R_L = 2\text{k}$, $C_L = 100\text{pF}$		15		%
Input Resistance	R_i		0.3	2		M
Output Resistance	R_o			75		
Total Harmonic Distortion	THD	$f = 1\text{kHz}$, $A_v = 20\text{dB}$, $R_L = 2\text{k}$, $V_o = 2\text{Vpp}$, $C_L = 100\text{pF}$		0.008		%
Channel Separation	V_{o1}/V_{o2}			120		dB

FREQUENCY CHARACTERISTICS ($T_A=25^\circ\text{C}$, $V_{CC}=15\text{V}$, $V_{EE}=-15\text{V}$)

PARAMETER	SYMBOL	TEST CONDUCTION	MIN	TYP	MAX	UNIT
Unity Gain Bandwidth	BW		2.0	2.8		MHz

TA4558

TYPICAL PERFORMANCE CHARACTERISTICS

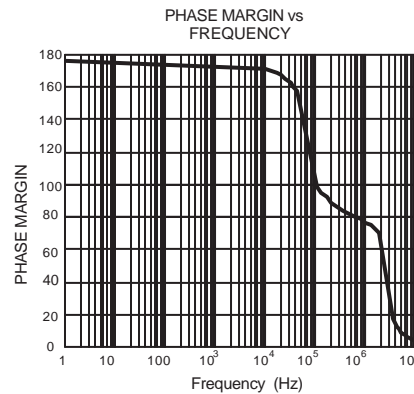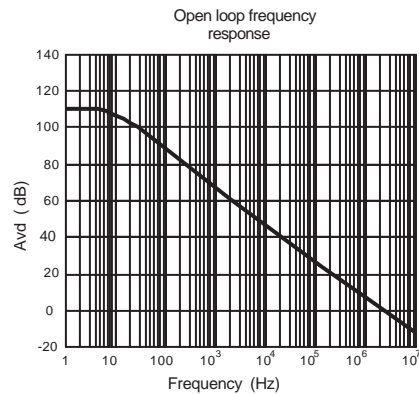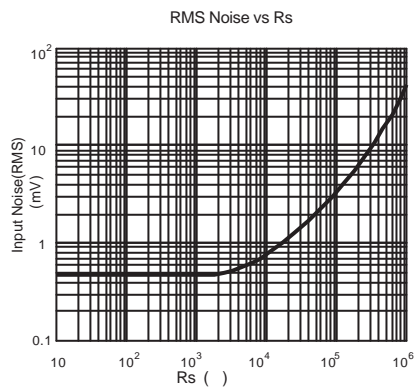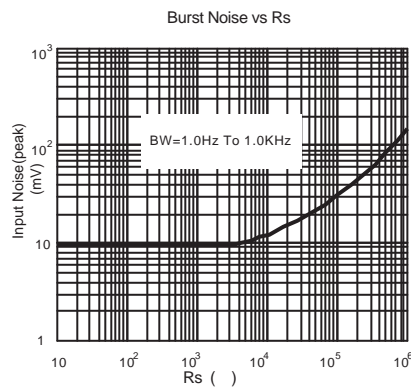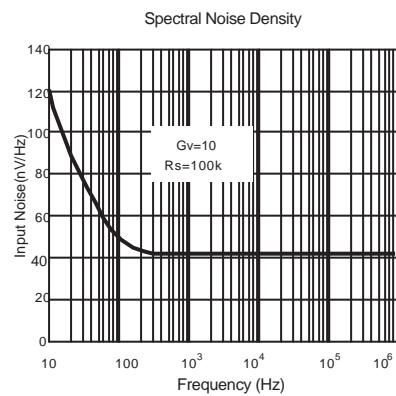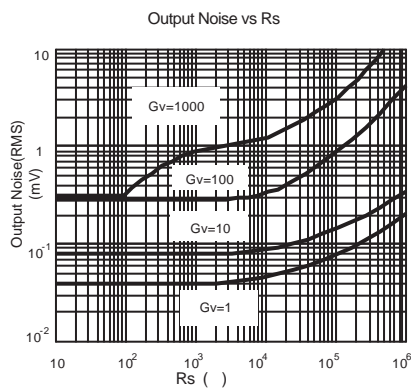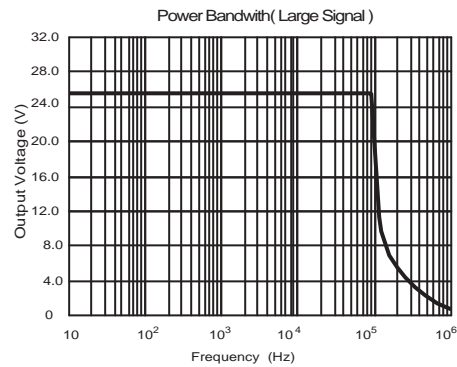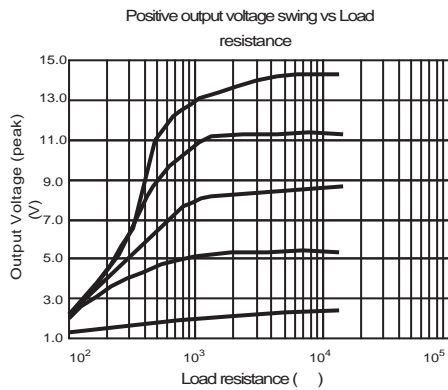

www.DataSheet4U.com