


SSL-LX3353XX SERIES SQUARE 3x3mm LED LAMPS

- | | | |
|--|---|---|
| FEATURES <ul style="list-style-type: none"> • Four Color Choices • Square 3x3 Lens • Long Life/Low Power • Built-in Lens Stopper | APPLICATIONS <ul style="list-style-type: none"> • Panel Indicators • Status Illuminations • Switches/Keyboards | OPTIONS AVAILABLE <ul style="list-style-type: none"> • Add-on Spacers • Add-on Leads • P.C. Mounting Options |
|--|---|---|

| LUMEX PART NBR | EMITTED COLOR | | EPOXY LENS COLOR | BRIGHTNESS | | VIEW ANGLE | VI@20mA | |
|-------------------------|---------------|------------|------------------|------------|-------|------------|---------|-----|
| | PEAK(nm) | LENS COLOR | | TYP.(mcd.) | I(mA) | | TYP. | MAX |
| SSL-LX3353ID | RED | 635 | RED DIFF. | 10 | 20 | 80 | 2.0 | 2.8 |
| SSL-LX3353SRD | RED | 660 | RED DIFF. | 30 | 20 | 80 | 1.7 | 2.2 |
| SSL-LX3353GD | GREEN | 565 | GREEN DIFF. | 10 | 20 | 80 | 2.1 | 2.8 |
| SSL-LX3353YD | YELLOW | 585 | YELLOW DIFF. | 10 | 20 | 80 | 2.1 | 2.8 |
| BI-COLOR OPTIONS | | | | | | | | |
| SSL-LX3353IGW | RED/GREEN | 635/565 | WHITE DIFF. | 6/6 | 20/20 | 80 | 2.0 | 2.8 |

See pages 8 -14 for Max. operating limits and operating curves

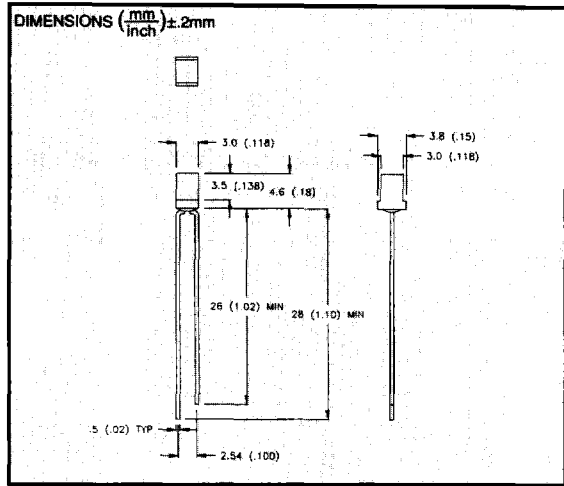


SSF-LXH4RA33XX SERIES P.C. LED 3.0 SQ. REMOVABLE LEADS

- | | | |
|---|---|---|
| FEATURES <ul style="list-style-type: none"> • Easy Installation • Removable LEDES • Choice of Colors | APPLICATIONS <ul style="list-style-type: none"> • P.C. Mount Indicator • Fault Indicator • Back Lighting Indicator | MATERIAL SPECIFICATIONS <ul style="list-style-type: none"> • Holder: Noryl/Grey • Termination: Copper/Tinned • Installation: P.C. Mount/Solder |
|---|---|---|

| LUMEX PART NBR | EMITTED COLOR | | OPERATING CURRENT (mA) | OPERATING TYP Volts (V) | BRIGHTNESS | | LED SERIES USED |
|------------------------|---------------|------------|------------------------|-------------------------|-------------|----|-----------------|
| | PEAK(nm) | LENS COLOR | | | TYP (mcd) @ | mA | |
| SSF-LXH4RA33ID | RED | 635 | 10-25 | 2.1 | 10 | 20 | SSL-LX3353XX |
| SSF-LXH4RA33SRD | RED | 660 | 10-25 | 1.7 | 30 | 20 | SSL-LX3353XX |
| SSF-LXH4RA33GD | GREEN | 565 | 10-25 | 2.1 | 10 | 20 | SSL-LX3353XX |
| SSF-LXH4RA33YD | YELLOW | 585 | 10-25 | 2.1 | 10 | 20 | SSL-LX3353XX |
| BI-COLOR OPTION | | | | | | | |
| SSF-LXH4RA33HGW | RED/GREEN | 635/565 | 10-25 | 2.1 | 6/6 | 20 | SSL-LX3353HGW |

See pages 8 -14 for Max. operating limits and operating curves

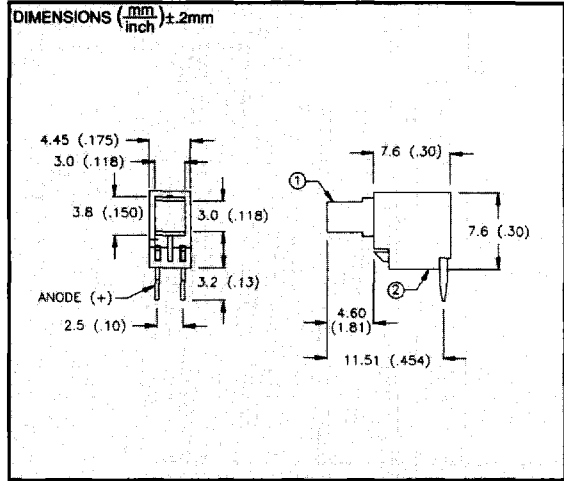

SSL-LX5573XX SERIES SQUARE 5x5mm LED LAMPS

- | | | |
|---|---|---|
| FEATURES <ul style="list-style-type: none"> • Four Color Choices • Square 5x5 Lens • Long Life/Low Power | APPLICATIONS <ul style="list-style-type: none"> • Panel Indicators • Status Illuminations • Switches/Keyboards | OPTIONS AVAILABLE <ul style="list-style-type: none"> • Add-on Spacers • Add-on Leads • Panel Mounting Hardware |
|---|---|---|

| LUMEX PART NBR | EMITTED COLOR | | EPOXY LENS COLOR | BRIGHTNESS | | VIEW ANGLE | VI@20mA | |
|-------------------------|---------------|------------|------------------|------------|-------|------------|---------|-----|
| | PEAK(nm) | LENS COLOR | | TYP.(mcd.) | I(mA) | | TYP. | MAX |
| SSL-LX5573ID | RED | 635 | RED DIFF. | 10 | 20 | 80 | 2.0 | 2.8 |
| SSL-LX5573SRD | RED | 660 | RED DIFF. | 30 | 20 | 80 | 1.7 | 2.2 |
| SSL-LX5573GD | GREEN | 565 | GREEN DIFF. | 10 | 20 | 80 | 2.1 | 2.8 |
| SSL-LX5573 YD | YELLOW | 585 | YELLOW DIFF. | 10 | 20 | 80 | 2.1 | 2.8 |
| BI-COLOR OPTIONS | | | | | | | | |
| SSL-LX5573HGW | RED/GREEN | 635/565 | WHITE DIFF. | 6/6 | 20/20 | 80 | 2.0 | 2.8 |

See pages 8 -14 for Max. operating limits and operating curves

