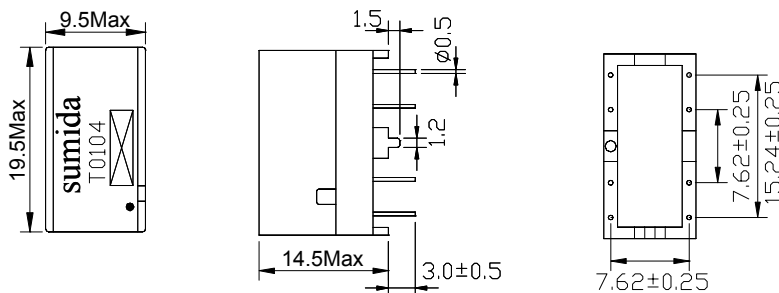

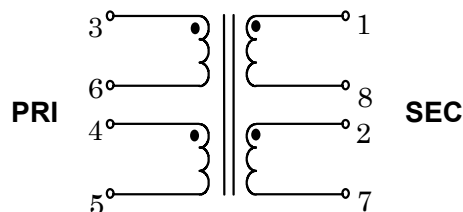


Type: BM2014
◆ Product Description

- 19.5×9.5mm Max.(L×W),14.5mm Max. Height.
- Operating frequency: 4~21MHz.


◆ Feature

- HomePlug unshielded line isolation transformer.
- Ideally for powerline network applications in set-top box and other CPE data networking devices.
- RoHS Compliance.

◆ Dimensions (mm)

◆ Land Pattern (mm)

◆ Schematics(Bottom)

◆ Specification(Part Number:T0104)

Characteristics	Specifications	Measuring conditions
Inductance(Is) (1-8)	61 μ h min	100kHz, 0.1v
Turns ratio (t/r) (1-8): (2-7)	6 : 1 (\pm 5%)	10kHz, 0.1v
Turns ratio (t/r) (1-8): (3-6)	6 : 1 (\pm 5%)	10kHz, 0.1v
Turns ratio (t/r) (1-8): (4-5)	6 : 1 (\pm 5%)	10kHz, 0.1v
D.C.R. (1-8)	Max. 50m Ω	at 25°C
D.C.R. (2-7)	Max. 15m Ω	at 25°C
D.C.R. (3-6)	Max. 15m Ω	at 25°C
D.C.R. (4-5)	Max. 15m Ω	at 25°C