

RF AMPLIFIER

MODEL *TM5107*

Available as: TM5107, 4 Pin TO-8 (T4)
 TN5107, 4 Pin Surface Mount (SM3)
 FP5107, 4 Pin Flatpack (FP4)
 BX5107, Connectorized Housing (H1)

Features

- Low Noise Figure: <1.75 dB Typical
- Gain: 15 dB Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10-550 MHz	10-550 MHz
Gain (dB)	15.0	14.0 Min.
Power @ 1 dB Comp. (dBm)	>+2	+1.0 Min.
Reverse Isolation (dB)	-20	-18 Max.
VSWR In	<1.75:1	2.0:1 Max.
Out	<1.75:1	2.0:1 Max.
Noise Figure (dB)	<1.75	2.3 Max.
Power Vdc	+15	+15
mA	9.0	10.0 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point.....+22 dBm (Typ.)
 Second Order Two Tone Intercept Point.....+16 dBm (Typ.)
 Third Order Two Tone Intercept Point.....+13 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 100 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.2 Watt (3 µsec Max.)

Typical Performance Data

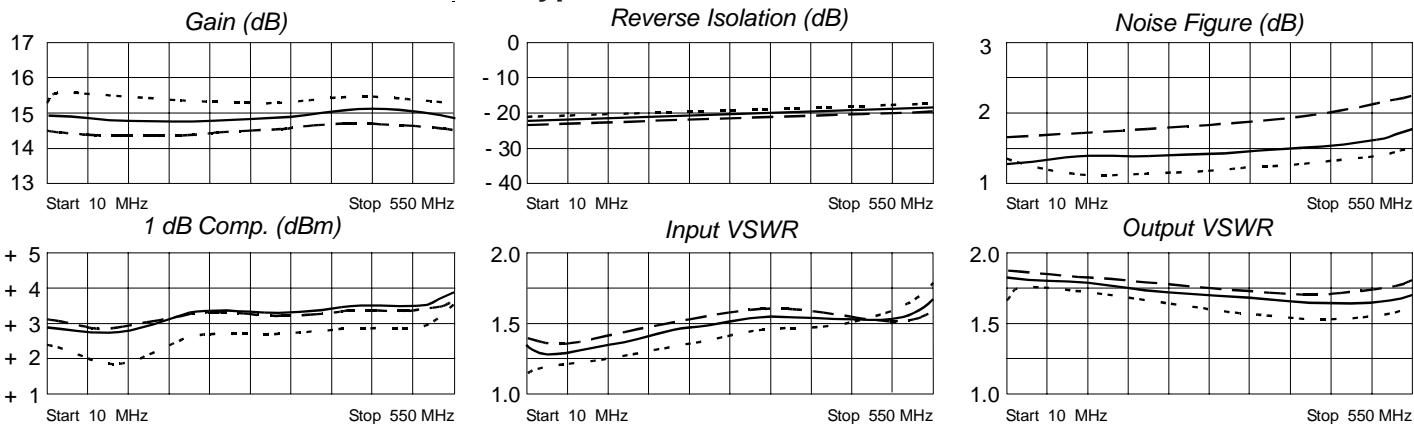

Legend ——— + 25 °C - - - - + 85 °C ······ -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.14	- 29	5.70	-176	.09	-176	.29	- 11
50	.13	- 40	5.63	167	.09	166	.28	- 14
100	.15	- 64	5.59	154	.09	151	.27	- 23
200	.20	-106	5.54	127	.09	124	.26	- 44
300	.24	-143	5.49	101	.09	95	.25	- 67
400	.26	176	5.57	72	.10	69	.25	- 92
500	.26	117	5.56	41	.10	40	.26	-125
550	.28	80	5.47	23	.10	27	.27	-146



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 6/8/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001