


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

FP24-100.DC2

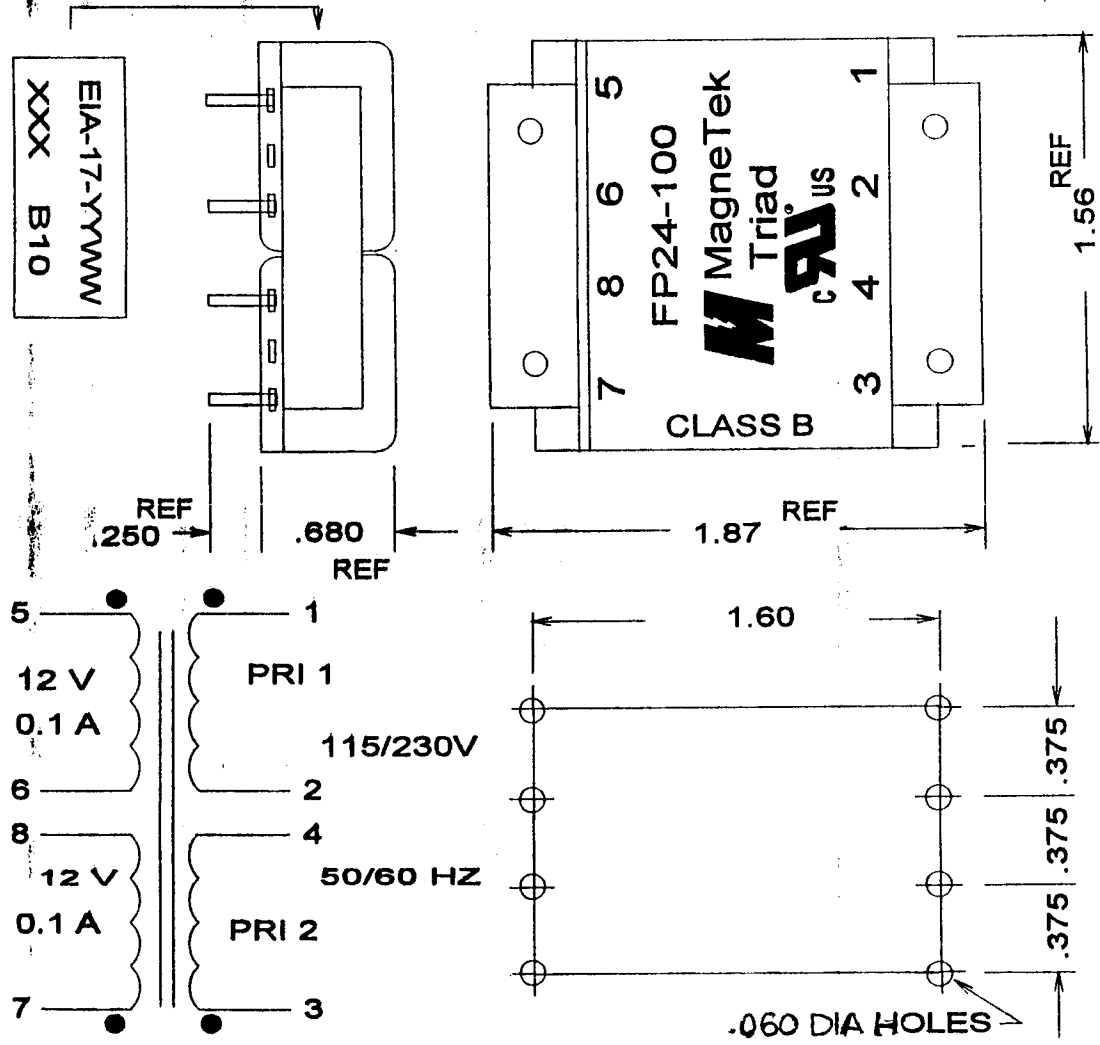

## PRODUCTION TESTS

URNS RATIO = 100%

DC RESISTANCE IN OHMS	1-2 = 3-4 = 765 TO 930
	5-6 = 7-8 = 15.8 TO 19.2

MAX EXCITATION CURRENT = .010 A  
 APPLY = 230V 60HZ, 1-4 (TIE 2+3)  
 OPEN CIRCUIT VOLTAGE  
 EACH PRI = 114.5 TO 115.5 V  
 EACH SEC = 15.45 TO 16.15 V

HIPOT = 2000V PRI'S TO SEC'S  
 1500V PRI'S, SEC'S TO CORE  
 500V P-P, S-S

### FINAL ASSEMBLY NOTES

**MagneTek**

PART NO. FP24-100