




- Cw/w: 35PF Max TX & RX @100KHz, 0.2V
- LL: 0.6μH Max TX & RX @ 100KHz, 0.2V
- Primary Pins: TX: 1-3, 6-8, 11-13, 16-18  
RX: 4-5, 9-10, 14-15, 19-20
- Polarity: 1-40, 4-37, 6-35, 9-32, 11-30,  
14-27, 16-25, 19-22, In-Phase
- Operating Temp: -40°C to +85°C

Electrical Specifications @ 25°C			
Part Number	OCL(μH Min TX & RX) @ 100KHz, 100mV	Turns Ratio chip: cable (±2%)	Isolation HI-POT (Vrms)
	With 8mA DC Bias		
AHSC-4009I	1200	1:2(TX)/1:1(RX)	1500

All specifications subject to change without notice.

### MECHANICAL

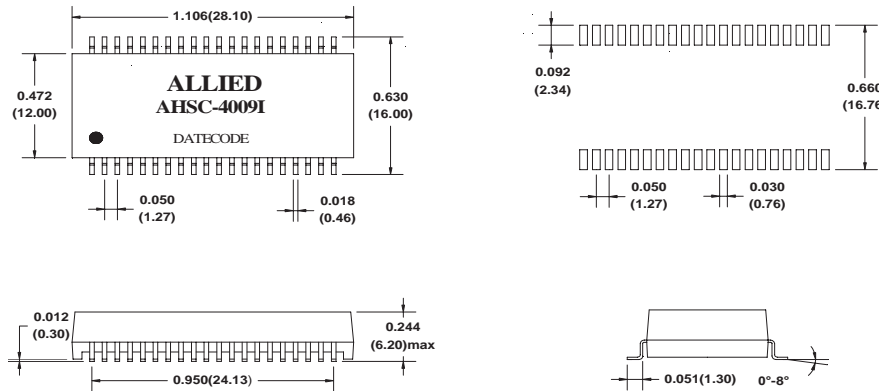

Dimensions:inch( mm)  
Unless otherwise specified, all tolerances are ±0.010(0.25)

### SCHEMATICS

