

isc Silicon NPN Power Transistors

BU112

DESCRIPTION

- Collector-Emitter Voltage-
: $V_{CEX(SUS)} = 550V(\text{Min.})$
- Collector Current- $I_C = 10A$

APPLICATIONS



- Designed for deflection circuits applications in color TV receivers fitted with 90°C kinescope.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Emitter Voltage	550	V
V_{CEX}	Collector-Emitter Voltage $V_{BE} = -5V$	550	V
V_{EBO}	Emitter-Base Voltage	10	V
I_C	Collector Current-Continuous	10	A
I_B	Base Current-Continuous	4	A
P_C	Collector Power Dissipation @ $T_C=25^\circ C$	60	W
T_j	Junction Temperature	200	°C
T_{stg}	Storage Temperature Range	-65~200	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	2.9	°C/W

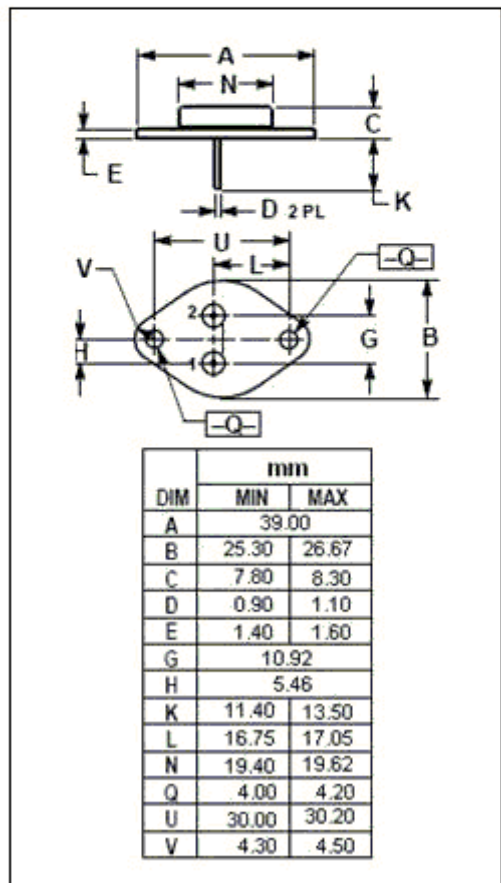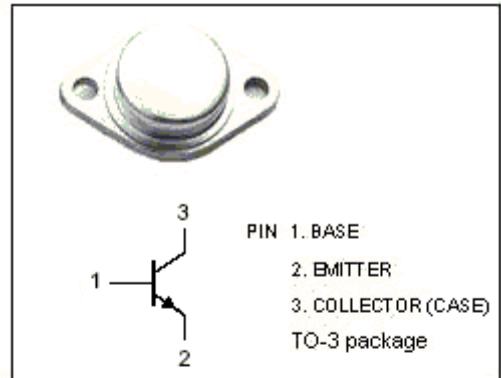

isc Silicon NPN Power Transistors

BU112

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)EBO}$	Collector-Base Breakdown Voltage	$I_E=30\text{mA}; I_C=0$	10			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=10\text{A}; I_B=2\text{A}$			3.0	V
I_{CEX}	Collector Cutoff Current	$V_{CE}=550\text{V}; V_{BE}=-5\text{V}$			10	mA
h_{FE}	DC Current Gain	$I_C=6\text{A}; V_{CE}=2\text{V}$	7			
f_T	Current-Gain—Bandwidth Product	$I_C=0.5\text{A}; V_{CE}=4\text{V}$		6		MHz
C_{OB}	Collector Output Capacitance	$I_E=0; V_{CB}=10\text{V}; f=1\text{MHz}$		250		pF
t_f	Fall Time	$I_C=6\text{A}; I_{B1}=1\text{A}; V_{BE}=-3\text{V}$			1.0	μs