

DC Fan

40mm San Ace 40




General specifications

- MaterialFrame, Impeller:Plastics
- Life ExpectancyVaries for each model (Survival rate: 90% at 60°C, rated voltage,and continuously run in a free air state)
- Motor Protection SystemCurrent blocking function (with reverse polarity protection)
- Dielectric Strength50/60 Hz, 500VAC, 1 minute (between lead conductor and frame)
- Operating Temperature RangeVaries for each model (Non-condensing)
- Lead WireS, H speeds ⊕red, ⊖black
M speed ⊕red, ⊖black or blue
- Mass19g (10mm thick) 32g (15mm thick)

10mm thick Specifications

Model No.	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (A)	Rated Input (W)	Rated Speed (min ⁻¹)	Air Flow (m ³ /min) (CFM)	Static Pressure (Pa) (inchH ₂ O)	Noise (dB [A])	Operating Temperature Range (°C)	Life Expectancy (h)
109P0405H902	5	4.5~ 5.5	0.16	0.8	6,200	0.15 5.3	41.16 0.165	25	-10 ~ +60	40,000
109P0405M902			0.11	0.55	5,000	0.12 4.2	26.95 0.108	21		
109P0412H902	12	7 ~13.8	0.07	0.84	6,200	0.15 5.3	41.16 0.165	25		
109P0412M902			0.06	0.72	5,000	0.12 4.2	26.95 0.108	21		

Air Flow and Static Pressure Characteristics

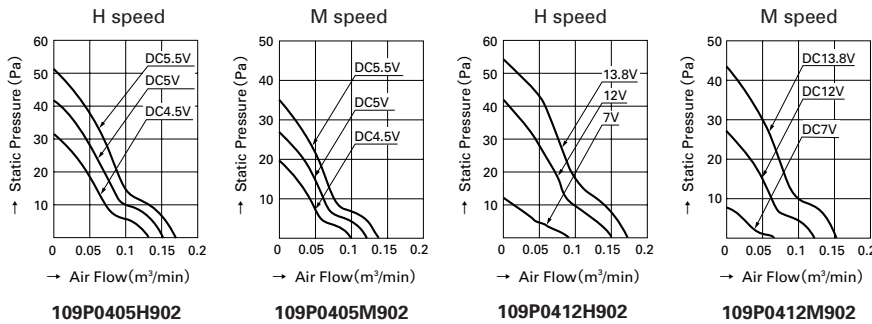

40mm

15mm thick Specifications

Model No.	Rated Voltage (V)	Operating voltage range (V)	Rated current (A)	Rated Input (W)	Rated Speed (min ⁻¹)	Air Flow (m ³ /min) (CFM)	Static pressure (Pa) (inchH ₂ O)	Noise (dB [A])	Operating Temperature Range (°C)	Life expectancy (h)
109P0405H702	5	4.5~ 5.5	0.28	1.4	7,700	0.18 6.4	75.5 0.303	28	-10 ~ +60	60,000
109P0405M702			0.21	1.05	6,500	0.15 5.3	53 0.213	24		
109P0412S702	12	10.2~13.8	0.18	2.16	8,600	0.2 7.06	92.1 0.369	32		
109P0412H702			0.13	1.56	7,700	0.18 6.4	75.5 0.303	28		
109P0412M702			0.095	1.14	6,500	0.15 5.3	53 0.213	24		
109P0424H702	24	20.4~27.6	0.08	1.92	7,700	0.18 6.4	75.5 0.303	28		

Air Flow and Static Pressure Characteristics

