

# jb® Aluminum Electrolytic Capacitor – JSS



## ■ FEATURES


- Standard product
- For industrial equipment control etc.

## ■ SPECIFICATIONS

Items	Performance Characteristics																															
Operating Temperature Range (°C)	-40°C~+85°C (16V~100V), -25°C~+85°C (160V~450V)																															
Rated Voltage Range (V)	16°C~450°C																															
Capacitance Range (µF)	33~68000																															
Capacitance Tolerance (25°C, 120Hz)	-10%~+50%																															
Leakage Current (µA)	3CV(µA) Max (25°C, after 5 minutes) C: Nominal Capacitance (µF) V: Rated Voltage (V)																															
Dissipation Factor (25°C, 120Hz)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th colspan="3">16~25</th> <th colspan="2">35~63</th> <th>80~350</th> <th>400~450</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Cap (µF)</td> <td>33000~</td> <td>15000~</td> <td>47000~</td> <td>1000~</td> <td>15000~</td> <td>47~</td> <td>33~</td> </tr> <tr> <td>10000</td> <td>33000</td> <td>68000</td> <td>10000</td> <td>33000</td> <td>10000</td> <td>470</td> </tr> <tr> <td>Tanδ (Max)</td> <td>0.35</td> <td>0.50</td> <td>0.75</td> <td>0.25</td> <td>0.35</td> <td>0.20</td> <td>0.25</td> </tr> </tbody> </table>	Rated Voltage (V)	16~25			35~63		80~350	400~450	Cap (µF)	33000~	15000~	47000~	1000~	15000~	47~	33~	10000	33000	68000	10000	33000	10000	470	Tanδ (Max)	0.35	0.50	0.75	0.25	0.35	0.20	0.25
	Rated Voltage (V)	16~25			35~63		80~350	400~450																								
	Cap (µF)	33000~	15000~	47000~	1000~	15000~	47~	33~																								
10000		33000	68000	10000	33000	10000	470																									
Tanδ (Max)	0.35	0.50	0.75	0.25	0.35	0.20	0.25																									
Temperature Stability (120Hz)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>16~100</th> <th>160~250</th> <th>315~450</th> </tr> </thead> <tbody> <tr> <td>Impedance</td> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>3</td> <td>8</td> </tr> <tr> <td>Ratio</td> <td>Z-40°C/Z+20°C</td> <td>12</td> <td>--</td> <td>--</td> </tr> </tbody> </table>	Rated Voltage (V)	16~100	160~250	315~450	Impedance	Z-25°C/Z+20°C	3	3	8	Ratio	Z-40°C/Z+20°C	12	--	--																	
	Rated Voltage (V)	16~100	160~250	315~450																												
	Impedance	Z-25°C/Z+20°C	3	3	8																											
Ratio	Z-40°C/Z+20°C	12	--	--																												
Load Life (85°C)	<table border="1"> <tbody> <tr> <td>Time</td> <td>1000hours</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> <tr> <td>Capacitance Change</td> <td>Within±20% of the initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> </tbody> </table>	Time	1000hours	Leakage Current	Not more than the specified value.	Capacitance Change	Within±20% of the initial value	Dissipation Factor	Not more than 200% of the specified value.																							
	Time	1000hours																														
	Leakage Current	Not more than the specified value.																														
	Capacitance Change	Within±20% of the initial value																														
Dissipation Factor	Not more than 200% of the specified value.																															
Shelf Life (85°C)	<table border="1"> <tbody> <tr> <td>Time</td> <td>1000hours</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> <tr> <td>Capacitance Change</td> <td>Within±20% of the initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> </tbody> </table>	Time	1000hours	Leakage Current	Not more than the specified value.	Capacitance Change	Within±20% of the initial value	Dissipation Factor	Not more than 200% of the specified value.																							
	Time	1000hours																														
	Leakage Current	Not more than the specified value.																														
	Capacitance Change	Within±20% of the initial value																														
Dissipation Factor	Not more than 200% of the specified value.																															

After test:  $U_R$  to be applied for 60 minutes, 24 to 48 hours before measurement.

## ■ DIMENSIONS (mm)

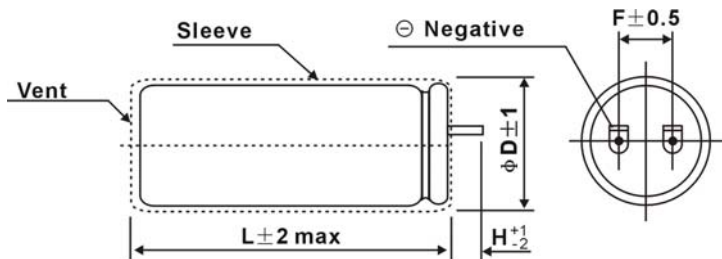

ΦD	22	25	30	35	40
F	8.5	10	14	14	14
H	10	12	12	12	12

## ■ MULTIPLIER FOR RIPPLE CURRENT

### Frequency coefficient

Rated Voltage(V)	Frequency(Hz)					
	50	60	120	1K	10K	≥50K
16~100	0.88	0.90	1.00	1.15	1.15	1.15
160~250	0.77	0.80	1.00	1.50	1.60	1.63
315~450	0.88	0.90	1.00	1.15	1.15	1.15

### Temperature coefficient

Temperature(°C)	+20	+45	+70	+85
Factor	1.50	1.48	1.30	1.00

Please visit our website to get more update data, those data & specification are subject to change without notice.

**jb® Capacitors Company**

Web-site: [www.jbcapacitors.com](http://www.jbcapacitors.com)

E-mail: [info@jbcapacitors.com](mailto:info@jbcapacitors.com)

Tel : (852)2790 5091

Fax: (852)8169 8283



# Aluminum Electrolytic Capacitor – JSS

## ■ STANDARD RATING

WV (V) / Cap (uF)	16	25	35	50	60	80	100
470	--	--	--	--	--	--	22x30
680	--	--	--	--	--	22x30	22x40
1000	--	--	--	--	22x30	22x40	25x40
1500	--	--	--	22x30	22x40	22x40	25x50
2200	--	--	22x30	22x40	25x40	25x50	30x50
3300	--	22x30	22x40	25x40	25x50	30x50	35x50
4700	22x30	22x40	25x40	25x50	30x50	35x50	35x63
6800	22x30	25x40	25x50	30x50	30x50	35x63	35x100
10000	25x40	25x50	30x50	35x63	35x80	35x100	--
15000	30x50	30x63	35x63	35x80	35x100	--	--
22000	30x63	35x63	35x80	35x100	--	--	--
33000	35x63	35x80	40x100	--	--	--	--
47000	35x80	40x100	--	--	--	--	--
68000	40x100	--	--	--	--	--	--

WV (V) / Cap (uF)	160	200	250	315	350	400	450
33	--	--	--	--	--	22x30	22x30
47	--	--	--	22x30	22x30	22x40	22x40
68	--	--	22x30	22x40	22x40	25x40	25x40
100	--	22x30	22x40	25x40	25x40	25x50	30x50
150	22x30	22x40	25x40	25x50	25x50	30x50	35x50
220	22x40	25x40	25x50	30x50	30x50	35x50	35x63
330	25x50	25x50	30x50	35x50	35x50	35x63	35x80
470	30x50	30x50	35x50	35x63	35x80	35x100	40x100
680	35x50	35x50	35x63	35x80	35x100	40x100	--
1000	35x63	35x63	35x80	40x100	40x100	--	--
1500	35x80	35x100	40x100	--	--	--	--
2200	40x100	40x100	--	--	--	--	--

Please visit our website to get more update data, those data & specification are subject to change without notice.