


LBS-1XX-X-X-D

POSITION SPECIFICATION
 -01 THRU -36
 "A" = NO. OF POS. x .100

LEAD STYLE SPECIFICATION
 (SEE TABLE 1)

PLATING SPECIFICATION
 -G: GOLD -SPECIFY -G IN TERMINAL SUFFIX -X
 -T: TIN -SPECIFY -T IN TERMINAL SUFFIX -X
 -F: FLASH GOLD -SPECIFY -F IN TERMINAL SUFFIX -X
 (SEE TABLE 1)

BODY SPECIFICATION
 USE LBS-36-D

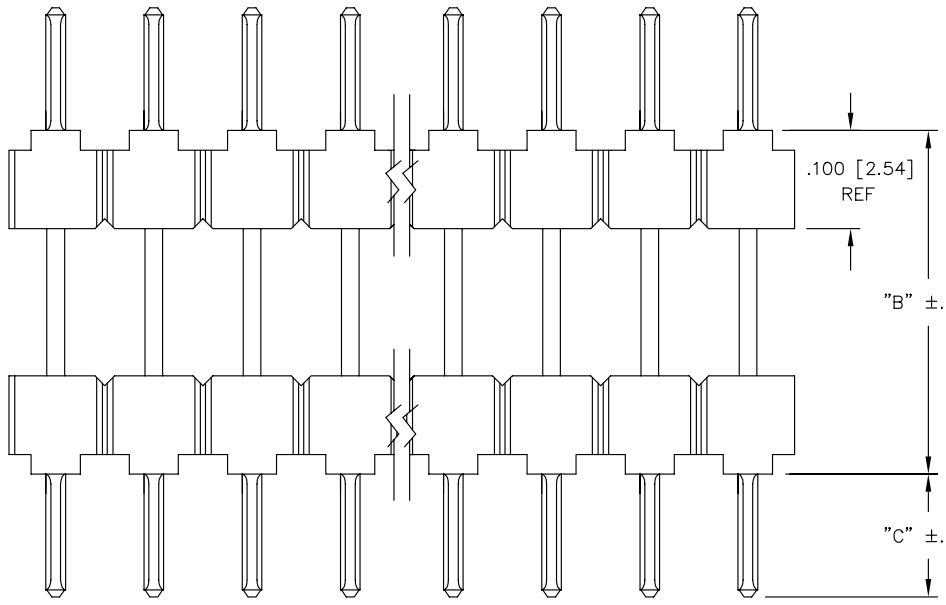


- NOTES:**
1. MIN. PUSHOUT FORCE: 3 lbs.
 2. MAX. ALLOWABLE BOW AFTER ASSEMBLY: .003 [.08] in./in.
 3. MAX. VARIATION BETWEEN ANY TWO PINS TO BE .010 [.25] MAX.
 4. Δ REPRESENTS A CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL USE.

TABLE 1

STYLE	"B"	"C"	TERMINAL	COMMENTS
A	.210 [5.33]	.125 [3.18]	T-1M7-01-X	FOR USE WITH
B	.335 [8.51]	.125 [3.18]	T-1M7-02-X	STANDARD "SS"
C	.585 [14.86]	.125 [3.18]	T-1M7-03-X	SOCKET STRIP
D	.835 [21.21]	.125 [3.18]	T-1M7-04-X	

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

PLOT SCALE: 1=.1

		MISC\MKTG LBS-DMKT
810 PROGRESS BLVD. NEW ALBANY, INDIANA 47150 PHONE (812) 944-6733 P.O. BOX 1147 CODE 55322		
MADE BY: GREG REIDINGER 10-15-92	ENGINEER APPROVAL PAE	LBS-1XX-X-X-D SHEET 1 OF 1