




Inductors

Subminiature, Shielded

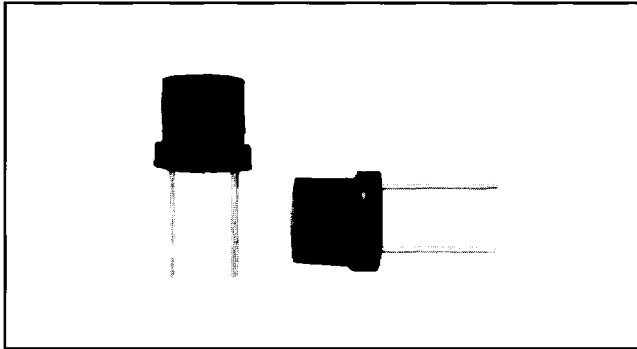

FEATURES

- Classification is Grade 1, Class B.
- Subminiature shielded.
- Inductance range is .10μH to 100,000μH.
- Printed board mounting facilitated by .200" [5.08mm] grid spacing.
- Radial lead fixed inductor.
- High Q values.
- Unitized epoxy-molded construction.
- Shielded construction to allow maximum density packaging.

DENSITY SPECIFICATIONS

- Weight:** 1.5 grams maximum.
- Shielding:** 3% coupling maximum when two units are tested side by side.

ENVIRONMENTAL SPECIFICATIONS

- Moisture:** Per MIL-STD-202, Method 106.
- Vibration:** Low frequency, 10Hz to 55Hz @ .06" [1.52 mm] maximum total excursion at rate of 1 linear sweep per minute for 2 hours repeated for each of three mutually perpendicular planes.
- Shock:** 100 g, 6 ms, body mounted.


ELECTRICAL SPECIFICATIONS

- Inductance Tolerance:** ± 10%.
- Dielectric Strength:** 840V RMS at sea level.
- Working Voltage:** 300 VDC.
- Q and SRF Values:** Minimum not less than 80% of specified value.
- Maximum Current:** Based on temperature rise not to exceed 35°C at + 90°C ambient.

MECHANICAL SPECIFICATIONS

- Operating Temperature:** - 55°C to + 125°C.
- Terminal Pull:** 3 pounds.

DIMENSIONAL CONFIGURATIONS [Numbers in brackets indicate millimeters]

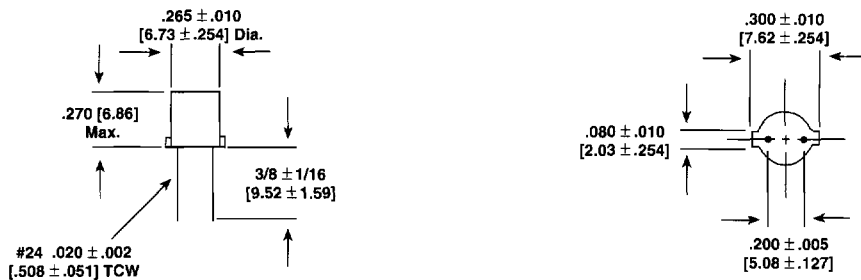

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	IND. (μH)	TOL.	Q NOM.	TEST FREQ. (MHz)	SELF-RESONANT FREQ. NOM. (MHz)	DCR MAX. (Ohms)	RATED DC CURRENT (mA)	INCREMENTAL* CURRENT (mA)
PC	.10	± 10%	70	25	> 250	.030	2500	2500
PC	.12	± 10%	70	25	> 250	.030	2500	2500
PC	.15	± 10%	70	25	> 250	.030	2500	2500
PC	.18	± 10%	70	25	> 250	.035	2400	2400
PC	.22	± 10%	70	25	> 250	.038	2300	2300
PC	.27	± 10%	80	25	> 250	.040	2200	2200
PC	.33	± 10%	80	25	> 250	.040	2200	2200

*Incremental Current: The DC current required to cause a 5% reduction in the nominal inductance value.



STANDARD ELECTRICAL SPECIFICATIONS								
MODEL	IND. (μH)	TOL.	Q NOM.	TEST FREQ. (MHz)	SELF-RESONANT FREQ. NOM. (MHz)	DCR MAX. (Ohms)	RATED DC CURRENT (mA)	INCREMENTAL* CURRENT (mA)
PC	.39	± 10%	80	25	250	.045	2100	2100
PC	.47	± 10%	80	25	230	.045	2100	2100
PC	.56	± 10%	80	25	220	.050	2000	2000
PC	.68	± 10%	80	25	190	.055	1900	1900
PC	.82	± 10%	85	25	180	.060	1800	1800
PC	1.0	± 10%	85	25	160	.070	1700	1700
PC	1.2	± 10%	90	7.9	170	.085	1670	1670
PC	1.5	± 10%	100	7.9	155	.100	1540	1540
PC	1.8	± 10%	115	7.9	135	.110	1470	1470
PC	2.2	± 10%	110	7.9	120	.120	1410	1410
PC	2.7	± 10%	110	7.9	104	.125	1380	1380
PC	3.3	± 10%	90	7.9	93	.165	1200	1200
PC	3.9	± 10%	90	7.9	87	.180	1135	1135
PC	4.7	± 10%	95	7.9	79	.245	985	985
PC	5.6	± 10%	95	7.9	72	.265	950	950
PC	6.8	± 10%	85	7.9	63	.330	853	853
PC	8.2	± 10%	95	7.9	60	.460	720	720
PC	10	± 10%	90	7.9	54	.640	620	620
PC	12	± 10%	120	2.5	37	.800	545	545
PC	15	± 10%	120	2.5	28.8	.865	520	520
PC	18	± 10%	115	2.5	23.8	.940	504	504
PC	22	± 10%	125	2.5	21.3	1.03	460	460
PC	27	± 10%	115	2.5	20.6	1.18	418	418
PC	33	± 10%	120	2.5	18.6	1.30	398	398
PC	39	± 10%	120	2.5	17.7	1.41	385	385
PC	47	± 10%	110	2.5	14.9	1.61	350	350
PC	56	± 10%	115	2.5	13.9	2.08	330	333
PC	68	± 10%	105	2.5	12.9	2.20	320	330
PC	82	± 10%	105	2.5	11.7	2.42	300	320
PC	100	± 10%	95	2.5	10.5	2.15	333	300
PC	120	± 10%	95	.79	5.6	2.38	316	190
PC	150	± 10%	90	.79	5.2	2.52	306	175
PC	180	± 10%	95	.79	4.9	2.88	288	150
PC	220	± 10%	95	.79	4.6	3.18	273	125
PC	270	± 10%	100	.79	4.2	3.50	260	120
PC	330	± 10%	100	.79	3.55	4.80	222	110
PC	390	± 10%	100	.79	3.45	5.44	209	105
PC	470	± 10%	100	.79	3.2	5.9	201	100
PC	560	± 10%	95	.79	2.9	6.3	194	90
PC	680	± 10%	100	.79	2.7	7.2	181	80
PC	820	± 10%	90	.79	2.5	8	172	70
PC	1000	± 10%	100	.79	2.35	12	141	65

*Incremental Current: The DC current required to cause a 5% reduction in the nominal inductance value.

PART MARKING
— Manufacturer data printed

HOW TO ORDER		
PC	.10μH	± 10%
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE