


EB71F72 Series

- Oven Controlled Crystal Oscillator (OCXO)
- SC-Cut Crystal
- HCMOS output
- 5.0V supply voltage
- 5 pin DIP package
- External control voltage option available
- Stability to 20ppb

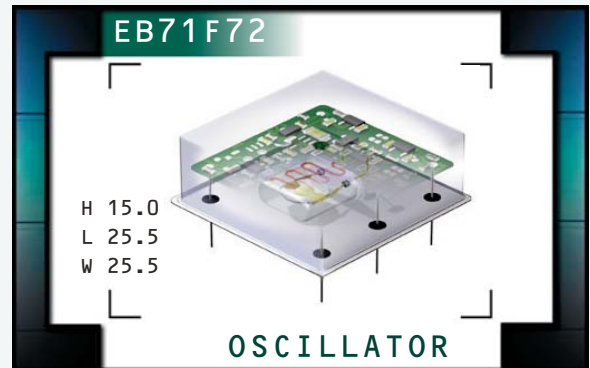

ELECTRICAL SPECIFICATIONS

| | | |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Frequency Range | 1.544MHz to 44.736MHz | |
| Operating Temperature Range (OTR) | 0°C to 50°C, 0°C to 70°C, or -20°C to 70°C | |
| Storage Temperature Range | -55°C to 125°C | |
| Supply Voltage (V_{DD}) | 5.0V _{DC} ±5% | |
| Frequency Tolerance / Stability | | |
| vs. Initial Tolerance | at Nominal V _{DD} and V _C , at 25°C | ±2.0ppm, ±1.5ppm, ±1.0ppm, ±500ppb, or ±300ppb Maximum |
| vs. Temperature Stability | at Nominal V _{DD} and V _C | ±20ppb, ±30ppb, ±50ppb, ±80ppb, ±100ppb, ±200ppb, ±280ppb, or ±500ppb Maximum |
| vs. V _{DD} | V _{DD} ±5% | ±20ppb Maximum |
| vs. Load | V _{load} ±5% | ±20ppb Maximum |
| vs. Aging (1 Day) | after 72 Hours of Operation | ±2.0ppb Maximum |
| vs. Aging (1 Year) | after 72 Hours of Operation | ±100ppb Maximum |
| vs. Aging (10 Years) | after 72 Hours of Operation | ±500ppb Maximum |
| Crystal Cut | SC-Cut | |
| Warm Up Time | to ±100ppb of Final Frequency at 1 Hour at 25°C | 1 Minute Maximum |
| Power Consumption | at Steady State, at 25°C | 2.2 Watts Maximum |
| | During Warm Up, at 25°C | 3.0 Watts Maximum |
| Output Voltage Logic High (V_{OH}) | I _{OH} = -8mA | V _{DD} - 0.5V _{DC} Minimum |
| Output Voltage Logic Low (V_{OL}) | I _{OL} = +8mA | 0.5V _{DC} Maximum |
| Rise Time / Fall Time | < 10.000MHz Measured at 20% to 80% of Waveform | 10 nSec Maximum |
| | > 10.000MHz Measured at 20% to 80% of Waveform | 6 nSec Maximum |
| Duty Cycle | Measured at 50% of Waveform | 50 ±5(%) |
| Load Drive Capability | 30pF HCMOS Load Maximum | |
| Frequency Deviation | Referenced to F ₀ at V _C = 2.5V _{DC} ; V _{DD} = 5.0V _{DC} over OTR | ±0.5ppm Minimum, ±2.2ppm Maximum |
| Control Voltage Range | 0.0V _{DC} to V _{DD} | |
| Control Voltage (V_C) | 2.5V _{DC} ±2.0V _{DC} | |
| Transfer Function | Positive Transfer Characteristic | |
| Reference Voltage Output | 4.0V _{DC} ±0.3V _{DC} | |
| Linearity | ±10% Maximum | |
| Input Impedance | 10kOhms Typical | |
| Typical Phase Noise (at 12.800MHz) | 1Hz Offset | -80dBc/Hz |
| | 10Hz Offset | -120dBc/Hz |
| | 100Hz Offset | -140dBc/Hz |
| | 1kHz Offset | -145dBc/Hz |
| | 10kHz Offset | -150dBc/Hz |

| | | | | | | |
|--------------------------------|------------------------|-------------------|----------------------|-----------------|---------------|--------------------|
| MANUFACTURER ECLIPTEK CORP. | CATEGORY OSCILLATOR | SERIES EB71F72 | PACKAGE 5 pin DIP | VOLTAGE 5.0V | CLASS OS2L | REV. DATE 10/03 |
|--------------------------------|------------------------|-------------------|----------------------|-----------------|---------------|--------------------|

PART NUMBERING GUIDE

EB71F72 A 10 B V 2 - 20.000M

INITIAL TOLERANCE
 A=±2.0ppm, B=±1.5ppm, C=±1.0ppm, D=±500ppb,
 E=±300ppb

FREQUENCY STABILITY
 2 Digit Code Per Table 1

OPERATING TEMPERATURE RANGE
 1 Letter Code Per Table 1

FREQUENCY




DUTY CYCLE
 2=50% ±5%

VOLTAGE CONTROL OPTION
 N=None (No Connect on Pin 3 and Pin 4)
 V=Voltage Control on Pin 3 and Reference
 Voltage Output on Pin 4

TABLE 1: PART NUMBERING CODES

| Operating Temperature Range | FREQUENCY STABILITY X Denotes availability | | | | | | | | |
|-----------------------------|-----------------------------------------------|--------|--------|--------|--------|---------|---------|---------|---------|
| | | ±20ppb | ±30ppb | ±50ppb | ±80ppb | ±100ppb | ±200ppb | ±280ppb | ±500ppb |
| | Code | 02 | 03 | 05 | 08 | 10 | 20 | 28 | 50 |
| 0°C to +50°C | A | X | X | X | X | X | X | X | X |
| 0°C to +70°C | B | | X | X | X | X | X | X | X |
| -20°C to +70°C | C | | | X | X | X | X | X | X |

MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

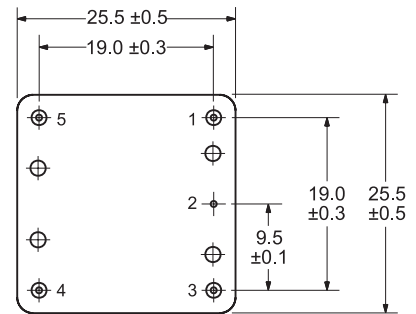

- Pin 1: Output
- Pin 2: Case/Ground
- Pin 3: No Connect or Voltage Control
- Pin 4: No Connect or Reference Voltage Output
- Pin 5: Supply Voltage

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

| Characteristic | Specification |
|------------------------------|---------------------------------------|
| Gross Leak Test | MIL-STD-883, Method 1014, Condition C |
| Mechanical Shock | MIL-STD-202, Method 213, Condition C |
| Vibration | MIL-STD-883, Method 2007, Condition A |
| Lead Integrity | MIL-STD-883, Method 2004 |
| Solderability | MIL-STD-883, Method 2002 |
| Temperature Cycling | MIL-STD-883, Method 1010 |
| Resistance to Soldering Heat | MIL-STD-883, Method 210 |
| Resistance to Solvents | MIL-STD-883, Method 215 |

MARKING SPECIFICATIONS

- Line 1: ECLIPTEK
- Line 2: XX.XXX M
 Frequency in MHz
 (5 Digits Maximum + Decimal)
- Line 3: XX Y ZZ
 Week of Year
 Last Digit of Year
 Ecliptek Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

| | | | | | | |
|--------------------------------|------------------------|-------------------|----------------------|-----------------|---------------|--------------------|
| MANUFACTURER ECLIPTEK CORP. | CATEGORY OSCILLATOR | SERIES EB71F72 | PACKAGE 5 pin DIP | VOLTAGE 5.0V | CLASS OS2L | REV. DATE 10/03 |
|--------------------------------|------------------------|-------------------|----------------------|-----------------|---------------|--------------------|