Omnimate Range - 5.08 mm Pitch

Socket header BLL 5.08/90







Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	14

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 217

Solder pin length		4.5 mm	4.5 mm	
Color				
Poles	Type	Part No.	Part No.	Qty.
2	BLL 5.08/2/90	**1645920000**	**1646030000**	100
3	BLL 5.08/3/90	**1645930000**	**1646040000**	100
4	BLL 5.08/4/90	**1645940000**	**1646050000**	100
5	BLL 5.08/5/90	**1645950000**	**1646060000**	50
6	BLL 5.08/6/90	**1645960000**	**1646070000**	50
7	BLL 5.08/7/90	**1645970000**	**1646080000**	50
8	BLL 5.08/8/90	**1645980000**	**1646090000**	50
9	BLL 5.08/9/90	**1645990000**	**1646100000**	50
10	BLL 5.08/10/90	**1646000000**	**1646110000**	50
11	BLL 5.08/11/90	**1646010000**	**1646120000**	50
12	BLL 5.08/12/90	**1646020000**	**1646130000**	50
13	BLL 5.08/13/90	**1648660000**	**1648780000**	50
14	BLL 5.08/14/90	**1648670000**	**1648790000**	50
15	BLL 5.08/15/90	**1648680000**	**1648800000**	50
16	BLL 5.08/16/90	**1648690000**	**1648810000**	50
17	BLL 5.08/17/90	**1648700000**	**1648820000**	20
18	BLL 5.08/18/90	**1648710000**	**1648830000**	20
19	BLL 5.08/19/90	**1648720000**	**1648840000**	20
20	BLL 5.08/20/90	**1648730000**	**1648850000**	20
21	BLL 5.08/21/90	**1648740000**	**1648860000**	20
22	BLL 5.08/22/90	**1648750000**	**1648870000**	20
23	BLL 5.08/23/90	**1648760000**	**1648880000**	20
24	BLL 5.08/24/90	**1648770000**	**1648890000**	20

BLL allows for touchsafe PCBs

Accessories	Page
Mounting	–
Marking	190
Coding	193
Miscellaneous	–

Socket header BLL 5.08/90B

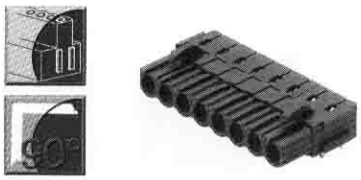





Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	14

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 217

Solder pin length		4.5 mm	4.5 mm	
Color				
Poles	Type	Part No.	Part No.	Qty.
2	BLL 5.08/2/90B	**1692970000**	**1684000000**	100
3	BLL 5.08/3/90B	**1692980000**	**1684010000**	100
4	BLL 5.08/4/90B	**1692990000**	**1684020000**	100
5	BLL 5.08/5/90B	**1693000000**	**1684030000**	50
6	BLL 5.08/6/90B	**1693010000**	**1684040000**	50
7	BLL 5.08/7/90B	**1693020000**	**1684050000**	50
8	BLL 5.08/8/90B	**1693030000**	**1684060000**	50
9	BLL 5.08/9/90B	**1693040000**	**1684070000**	50
10	BLL 5.08/10/90B	**1693050000**	**1684080000**	50
11	BLL 5.08/11/90B	**1693060000**	**1684090000**	50
12	BLL 5.08/12/90B	**1693070000**	**1684100000**	50
13	BLL 5.08/13/90B	**1693080000**	**1684110000**	50
14	BLL 5.08/14/90B	**1693090000**	**1684120000**	50
15	BLL 5.08/15/90B	**1693100000**	**1684130000**	50
16	BLL 5.08/16/90B	**1693110000**	**1684140000**	50
17	BLL 5.08/17/90B	**1693120000**	**1684150000**	20
18	BLL 5.08/18/90B	**1693130000**	**1684160000**	20
19	BLL 5.08/19/90B	**1693140000**	**1684170000**	20
20	BLL 5.08/20/90B	**1693150000**	**1684180000**	20
21	BLL 5.08/21/90B	**1693160000**	**1684190000**	20
22	BLL 5.08/22/90B	**1693170000**	**1684200000**	20
23	BLL 5.08/23/90B	**1693180000**	**1684210000**	20
24	BLL 5.08/24/90B	**1693190000**	**1684220000**	20

BLL allows for touchsafe PCBs

Accessories	Page
Mounting	187**
Marking	190
Coding	193
Miscellaneous	–

Socket header BLL 5.08/180







Technical data	VDE	UL	CSA
Rated voltage (V)	250*	300	300
Rated current (A)	12	15	14

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 217

Solder pin length		4.5 mm	4.5 mm	
Color				
Poles	Type	Part No.	Part No.	Qty.
2	BLL 5.08/2/180	**1646140000**	**1646250000**	100
3	BLL 5.08/3/180	**1646150000**	**1646260000**	100
4	BLL 5.08/4/180	**1646160000**	**1646270000**	100
5	BLL 5.08/5/180	**1646170000**	**1646280000**	50
6	BLL 5.08/6/180	**1646180000**	**1646290000**	50
7	BLL 5.08/7/180	**1646190000**	**1646300000**	50
8	BLL 5.08/8/180	**1646200000**	**1646310000**	50
9	BLL 5.08/9/180	**1646210000**	**1646320000**	50
10	BLL 5.08/10/180	**1646220000**	**1646330000**	50
11	BLL 5.08/11/180	**1646230000**	**1646340000**	50
12	BLL 5.08/12/180	**1646240000**	**1646350000**	50
13	BLL 5.08/13/180	**1649020000**	**1649140000**	50
14	BLL 5.08/14/180	**1649030000**	**1649150000**	50
15	BLL 5.08/15/180	**1649040000**	**1649160000**	50
16	BLL 5.08/16/180	**1649050000**	**1649170000**	50
17	BLL 5.08/17/180	**1649060000**	**1649180000**	20
18	BLL 5.08/18/180	**1649070000**	**1649190000**	20
19	BLL 5.08/19/180	**1649080000**	**1649200000**	20
20	BLL 5.08/20/180	**1649090000**	**1649210000**	20
21	BLL 5.08/21/180	**1649100000**	**1649220000**	20
22	BLL 5.08/22/180	**1649110000**	**1649230000**	20
23	BLL 5.08/23/180	**1649120000**	**1649240000**	20
24	BLL 5.08/24/180	**1649130000**	**1649250000**	20

BLL allows for touchsafe PCBs

Accessories	Page
Mounting	–
Marking	190
Coding	193
Miscellaneous	–

**See Note, page 187