

CTCR54 Series

From 10 μ H to 220 μ H

SPECIFICATIONS

Parts are only available in $\pm 20\%$ inductance tolerance.
CTCR54E Please specify "F" for RoHS Compliant




Part Number	Inductance (μ H)	L Test Freq. (.Hz)	DCR Max. (Ω)	Rated DC (A)
CTCR54_-100M	10	2.52M	0.1	1.44
CTCR54_-120M	12	2.52M	0.12	1.4
CTCR54_-150M	15	2.52M	0.14	1.3
CTCR54_-180M	18	2.52M	0.15	1.23
CTCR54_-220M	22	2.52M	0.18	1.11
CTCR54_-270M	27	2.52M	0.2	0.97
CTCR54_-330M	33	2.52M	0.23	0.88
CTCR54_-390M	39	2.52M	0.32	0.80
CTCR54_-470M	47	2.52M	0.37	0.72
CTCR54_-560M	56	2.52M	0.42	0.68
CTCR54_-680M	68	2.52M	0.46	0.61
CTCR54_-820M	82	2.52M	0.60	0.58
CTCR54_-101M	100	1.0k	0.70	0.52
CTCR54_-121M	120	1.0k	0.93	0.48
CTCR54_-151M	150	1.0k	1.1	0.40
CTCR54_-181M	180	1.0k	1.38	0.38
CTCR54_-221M	220	1.0k	1.57	0.35

PHYSICAL DIMENSIONS


Size	A Max.	B Max.	C Max.	D	E	F	G
mm	5.6	6.1	4.85	4.7	2.5	5.8	1.4
inches	0.220	0.240	0.191	0.185	0.098	0.228	0.055

CHARACTERISTICS

- Description:** SMD power inductor
- Applications:** VTR power supplies, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters
- Operating Temperature:** -30°C to +100°C
- Inductance Tolerance:** $\pm 20\%$
- Testing:** Inductance is tested on an HP4284A or HP4285A at specified frequency
- Packaging:** Tape & Reel
- Marking:** Marked with inductance code
- Rated DC:** This indicates the value of current when the inductance is 10% lower than its initial value at D.C. superimposition or D.C. current when at $\Delta T=40^\circ\text{C}$, whichever is lower.
- Miscellaneous:** RoHS Compliant available
- Additional Information:** Additional electrical & physical information available upon request
- Samples available. See website for ordering information.**

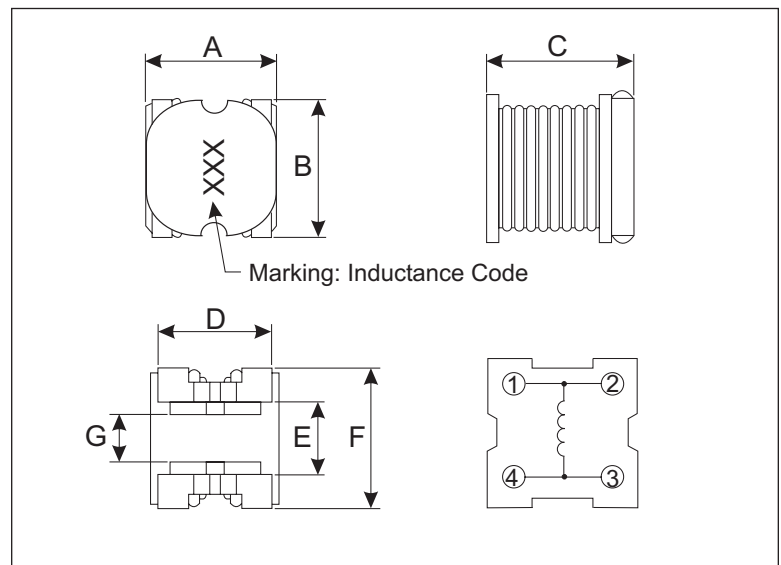

RECOMMENDED LAND PATTERN

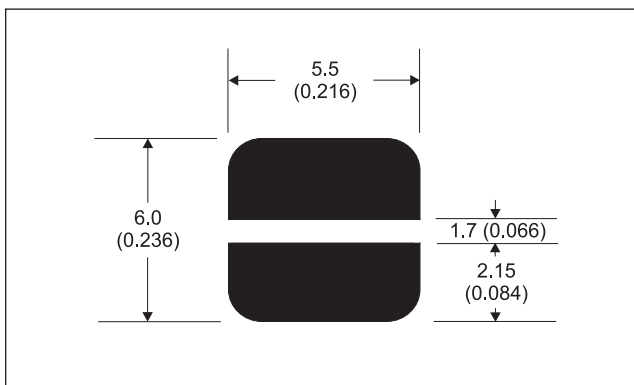

02.01.06