

SPECIFICATIONS

Constituent
 26POS. Smart Serial + Raw cable + 26POS.Smart Serial

Mechanical
 Retention Force between S/R and cable: 20 lb min.

Electrical
 Insulation Resistance: 10MW min./500V DC
 Contact Resistance: 5W
 Impedance: 100+/-10 W at 2MHz

Physical
 Overmold: PVC


Agency Approvals
 PVC:UL 94V-0 rated

Smart Series Cable assembly

Smart Series
 26POS. Smart Serial To
 26POS.Smart Serial



DRAWING

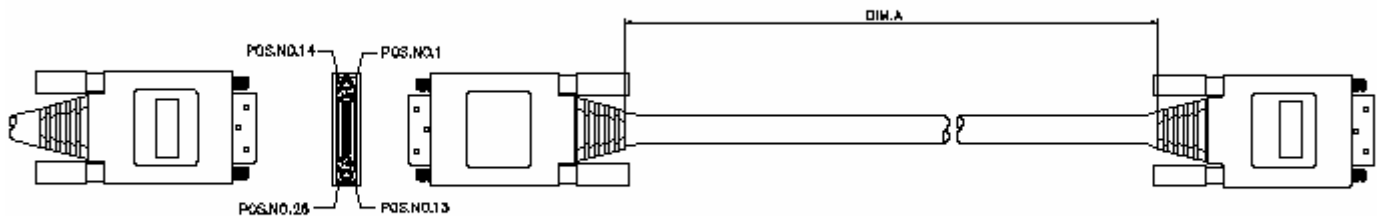

ORDERING INFORMATION

PRODUCT NO.: CQ D26 NN D26 - XXX - YF

CQ: Cable Assembly
 D26: Smart series 26 pos.
 NN: Length of Cable
 D26: Smart series 26pos.Connector
 XXX: Extension Code
 YF: Lead free

| | |
|-------------------|-----------------|
| CQD2602D26-028-YF | 610 [24.016] |
| CQD2601D26-016-YF | 50 [1.969] |
| P/N | DIM. A |