

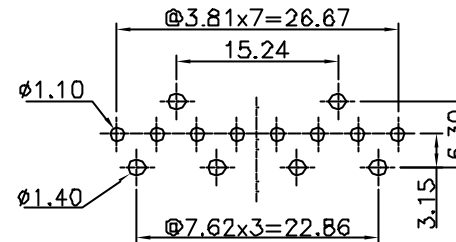
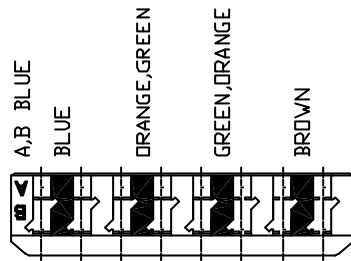
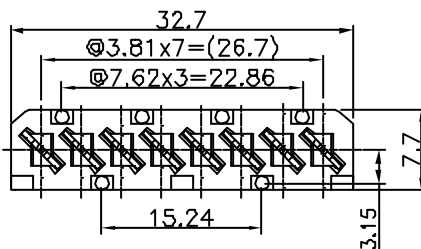


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	CHKD



PC Board Layout
Component Side Shown

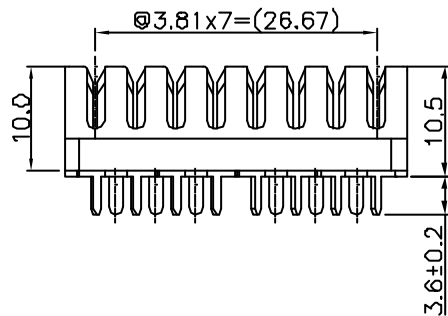

- Housing : PBT OR PPO OR PC
- Contact : Phosphor Bronze with silver plating
- Option : Phosphor Bronze with nickel plating
or Beryllium copper with silver plating
- Wire : cable sizes :
Solid copper wires up to 0.4mm – 0.8mm in dia.
Insulation :
PE or PVC insulated wire (100% PE/foam skin, filled/unfilled)
up to 1.4mm in diameter
- Contact resistance : 10 Milliohms Max.
- Voltage Rating : 250 VDC
- Operating Temperature : -20°C to +80°C and Humidity up to 95%
- Insulation Resistance : 500 VDC, voltage applied 5000 Megohms Min.
- Dielectric Strength : AC 2000 Vrms
- PART NUMBER: E4808-DKCY1X
- A- TIN
F- SILVER

DETACHED LISTS	← NM (INCH) →		DATE 10/08/01	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED		DATE 10/18/01		
	MM	±	DATE 10/18/01	TITLE KRONE IDC 8P print 568A/B	
	.00 ± 0.2	±	DATE		
.00 ± 0.18	±	MATERIAL :	DRAWING NO. GE483020		
.000 ± 0.075	±	QT'Y :			SIZE A3
ANGLES ± 0.5		FINISH :	/PART NO.		SHEET 1 OF 1
THIRD ANGLE PROJECTION		SCALE : 2:1			