




RCU SERIES

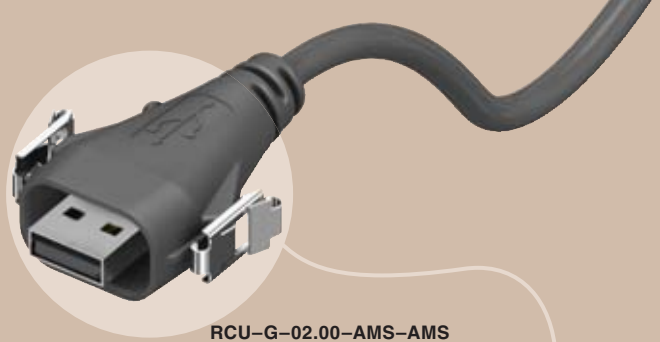

RCU-G-02.00-AMS-AMS

IP68 SEALED USB CABLE PLUG

SPECIFICATIONS

For complete specifications see www.samtec.com?RCU

- Insulator Material:** Glass Filled Thermoplastic
- Contact Material:** Phosphor Bronze
- Shield Material:** Phosphor Bronze
- Wire:** 20 AWG (Power), 25 AWG (Signal), 28 AWG (Drain)

Mates with:
RPCU, RPBU

ALSO AVAILABLE

- Dust Cap:
- AMS = DCRU-01-01-C-01
- BMS = DCRU-02-01-C-01



RCU	PLATING	WIRE LENGTH	END 1 OPTION	END 2 OPTION
	<p>-G = 30µ" (0,76µm) Gold on contact, Nickel on shell</p>	<p>-02.00 = (2m) 79" Cable</p> <p>-03.00 = (3m) 118" Cable</p> <p>-05.00 = (5m) 197" Cable</p>	<p>-AMS = USB A Type, Sealed</p> <p>-BMS = USB B Type, Sealed</p>	<p>-AMS = USB A Type, Sealed</p> <p>-BMS = USB B Type, Sealed</p> <p>-AM = USB A Type, Not Sealed</p> <p>-BM = USB B Type, Not Sealed (Only available with -AMS)</p> <p>-BC = Blunt Cut</p>

Due to technical progress, all designs, specifications and components are subject to change without notice.