MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-TOGGLE

CATALOG LISTING
104TL2-12 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MILITARY STANDARDS NUMBER	CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS	STYLE NUMBER	CURRENT CAPACITY (AMPS) RESISTIVE LOAD DC VOLTS 30	115	250	AC VOLTS 115	230	LAMP LOAD 30 VDC	115 VAC	INDUCTIVE LOAD 30 VDC	115 VAC
MS 27786 - 1	104TL2-12	NONE	1	7.5	.75	.5	7.5	6	5	4	7.5	7.5
MS 27789 - 1	104TL2-12 (7)	A,B,D,E,F,G,H,J,K,L,M,N,P	2									

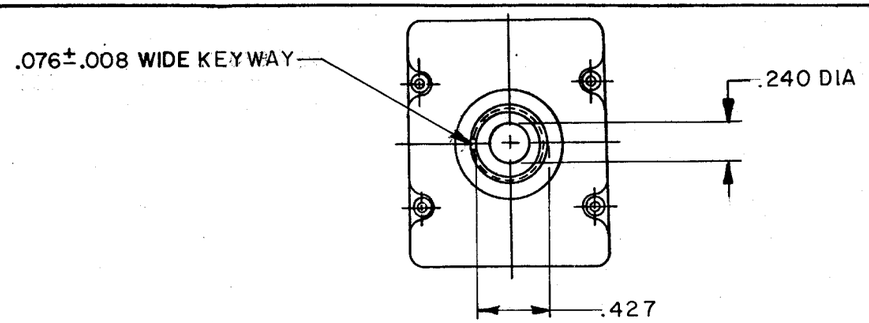

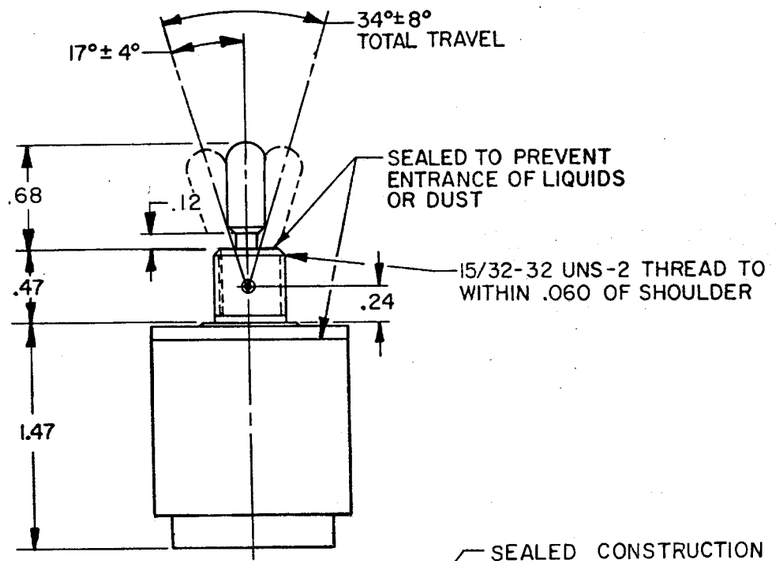

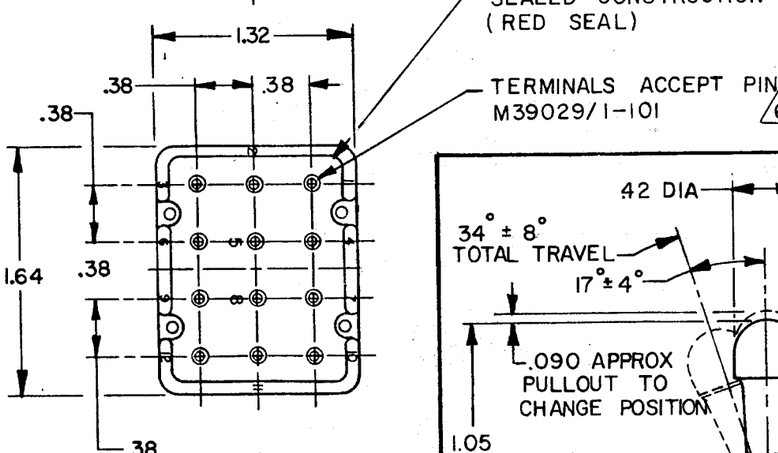

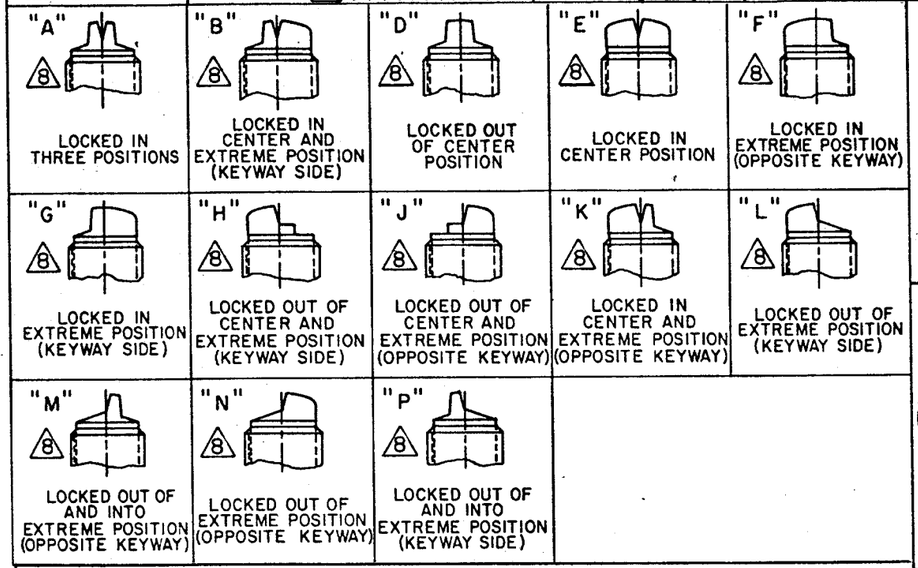

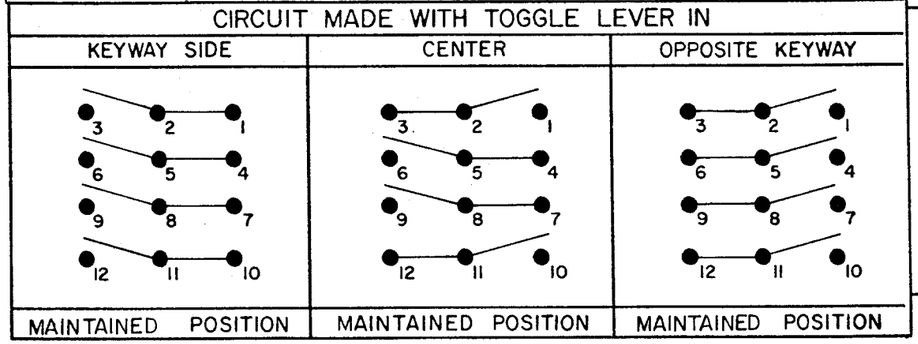







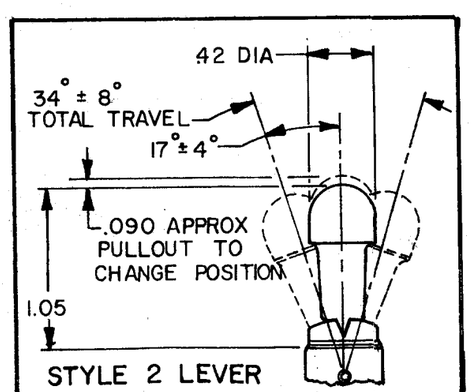

NOTES
1. SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2. **CIRCUIT DESIGNATION, MICRO SWITCH CATALOG LISTING AND MS NUMBER MARKED ON SIDE OF SWITCH**
3. UNUSED TERMINAL HOLES MAY BE SEALED WITH PLUGS M82723/28-20
4. FURNISHED UNASSEMBLED
5. THESE UNITS ARE QUALIFIED UNDER MIL-S-3950
6. THE SEALING GROMMET SHALL SEAL ON A SMOOTH WIRE INSULATION OF .040 TO .083 DIA (16-20 GAGE)
7. SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS.
8. KEYWAY SHOWN ON LEFT SIDE

104TL2-12 SERIES CHART 1 — REPLACES — RELEASE NO. PR-9555 — DRAWING NUMBER M110 — ISSUE X X X

REVISIONS

A	WAS ETS PR-9555 G J W 13 NOV 80		17 NOV 80
B	CO-50496 K A G 16 NOV 81		KJC
C	CO-52204 K A G 24 OCT 82		
D	C056074 G J W 21 NOV 84	CHECK	
E	C057478 T A D 12 JUL 85		
F	C059750 T A D 18 JUL 86		17 NOV 87
G	CO 76454 S A D 2 DEC 94		GLH

CHECK

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

DRAWN G J W 13 NOV 80 — FO-52851-A