

# Product Specifications

F4A-PNMDM-5M-3GSH

FSJ4-50B SureFlex™ Jumper with interface types N Male and 7-16 DIN Male, 5 m



## CHARACTERISTICS


### General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Cable Family	FSJ4-50B
Interface, Connector A	N Male
Interface, Connector B	7-16 DIN Male
Length	5.000 m   16.404 ft

### Electrical Specifications

3rd Order IMD	-116.00 dBm
DTF, Connector A	-34.00 dB
DTF, Connector B	-34.00 dB

### Jumper Assembly Sample Label

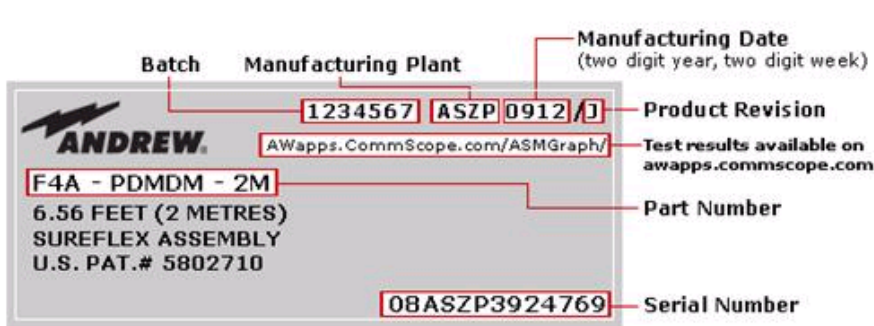

### Return Loss

Frequency Band	VSWR	Return Loss (dB)
698–960 MHz	1.06	30.00
1700–2200 MHz	1.06	30.00

### Regulatory Compliance/Certifications

Agency	Classification
--------	----------------

# Product Specifications

F4A-PNMDM-5M-3GSH

RoHS 2002/95/EC  
China RoHS SJ/T 11364-2006

Compliant by Exemption  
Above Maximum Concentration Value (MCV)



## INCLUDED PRODUCTS



### **FSJ4-50B**

FSJ4-50B, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 1/2 in, black PE jacket

---