



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

**SDR958N&P
thru
SDR9511N&P**

**50 AMP
800-1100 VOLTS
80 nsec
ULTRA FAST
RECTIFIER**


Designer's Data Sheet

FEATURES:


- Ultrafast Recovery: 60 nsec typical
- High Surge Rating
- Low Reverse Leakage Current
- Low Forward Voltage Drop
- Low Junction Capacitance
- Hermetically Sealed Package
- Gold Eutectic Die Attach available
- Ultrasonic Aluminum Wire Bonds
- Ceramic Seals for improved hermeticity available

- TX, TXV and Space Level Screening Available

TO-258



TO-259



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM	800	Volts
SDR958N&P SDR959N&P SDR9510N&P SDR9511N&P	VRWM	900	
		1000	
	VR	1100	
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C) note 1	IO	50	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, TA=25°C)	IFSM	550	Amps
Operating and storage temperature	Top & Tstg	-65 to +200	°C
Maximum Thermal Resistance Junction to Case, note 1	RθJC	0.85	°C/W

note 1 Pins 2&3 connected

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RU0113 A

MED

SDR958N&P thru SDR9511N&P

PRELIMINARY



SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (IF = 25 Adc, TA=25°C, 300ms Pulse) note 1 (IF = 50 Adc, TA=25°C, 300ms Pulse) note 1	VF	1.43 1.62	Vdc
Instantaneous Forward Voltage Drop (IF = 25 Adc, TA=100°C, 300ms Pulse) note 1 (IF = 25 Adc, TA= - 55°C, 300ms Pulse) note 1	VF	1.33 1.53	Vdc
Reverse Leakage Current (Rated VR, TA=25°C, 300ms pulse minimum)	IR	100	μA
Reverse Leakage Current (Rated VR, TA=100°C, 300ms pulse minimum)	IR	10	mA
Junction Capacitance (VR = 10 Vdc, TA=25°C, f= 1 MHz)	CJ	150	pf
Reverse Recovery Time (IF=500mA, IR=1 A, IRR=250mA, TA=25°C)	trr	80	nsec

CASE OUTLINE: TO-258


PIN 1: CATHODE
PIN 2: ANODE
PIN 3: ANODE

note 1:
Pin 2 & 3
connected
together

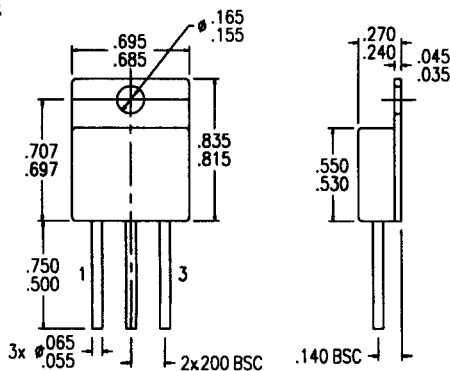

CASE OUTLINE: TO-259

PIN 1: CATHODE
PIN 2: ANODE
PIN 3: ANODE

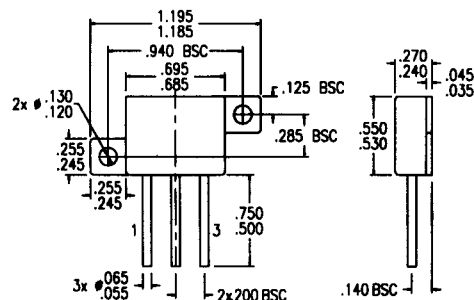

TYPICAL OPERATING CURVES

TA=25°C Unless otherwise specified

