
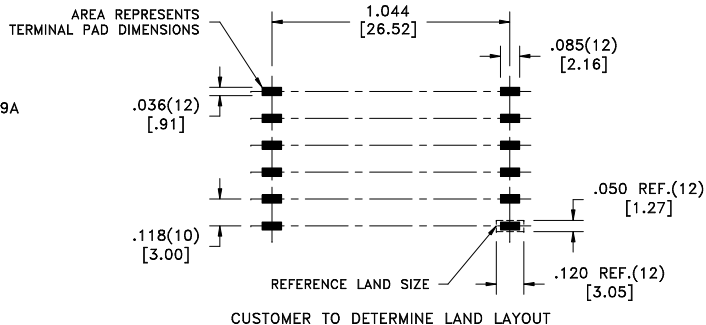



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

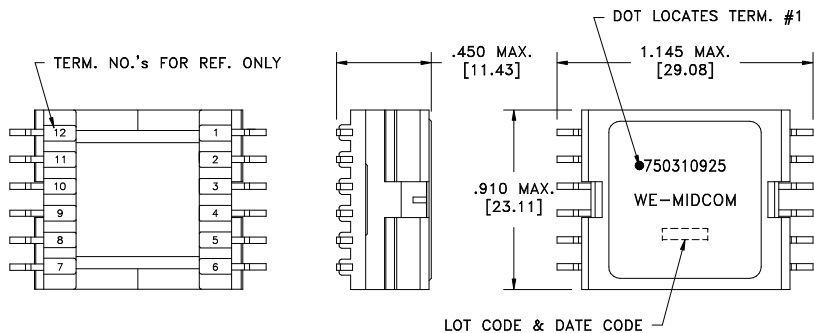

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 tie(1+2, 3+4), @20°C	0.060 ohms max.
D.C. RESISTANCE	5-6 @20°C	0.350 ohms max.
D.C. RESISTANCE	7-8 tie(7+9, 8+10), @20°C	0.008 ohms max.
D.C. RESISTANCE	11-12 @20°C	0.350 ohms max.
INDUCTANCE	1-3 tie(1+2, 3+4), 250kHz, 700mVAC, Ls	57.0uH ±10%
LEAKAGE INDUCTANCE	1-3 tie(1+2, 3+4, 5+6, 7+8+9+10+11+12), 250kHz, 100mVAC, Ls	1.2uH max.
DIELECTRIC	1-7 1875VAC, 1 second	1500VAC, 1 minute
TURNS RATIO	(3-1):(7-8)	8:1, ±1%
TURNS RATIO	(3-1):(9-10)	8:1, ±1%
TURNS RATIO	(3-1):(11-12)	4:1, ±1%
TURNS RATIO	(3-1):(5-6)	4:1, ±1%
TURNS RATIO	(3-1):(4-2)	1:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +85°C including temp rise.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0647 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750310925
6B	8/11			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750310925	SPECIFICATION SHEET 1 OF 1
6A	4/09	SEE REVISION SHEET FOR REVISION LEVEL				

