

SPECIFICATIONS

Header Connector

Mechanical

Contact Retention Force: 0.454Kgf min. Per Pin

HD9601F-T2

RF CONN., SMT Type
Plug

Electrical

Voltage Rating: 60V

Current Rating: 1.0A max. per pin

Dielectric Withstanding Voltage: 200V AC

Insulation Resistance: 500MΩ min.


Physical

Housing: High Temperature Nylon, UL 94V-0 Rating, Color Ivory


Contact: Copper alloy

Plating: See "ORDERING INFORMATION"

Operating Temperature: -40°C to +105°C



DRAWING

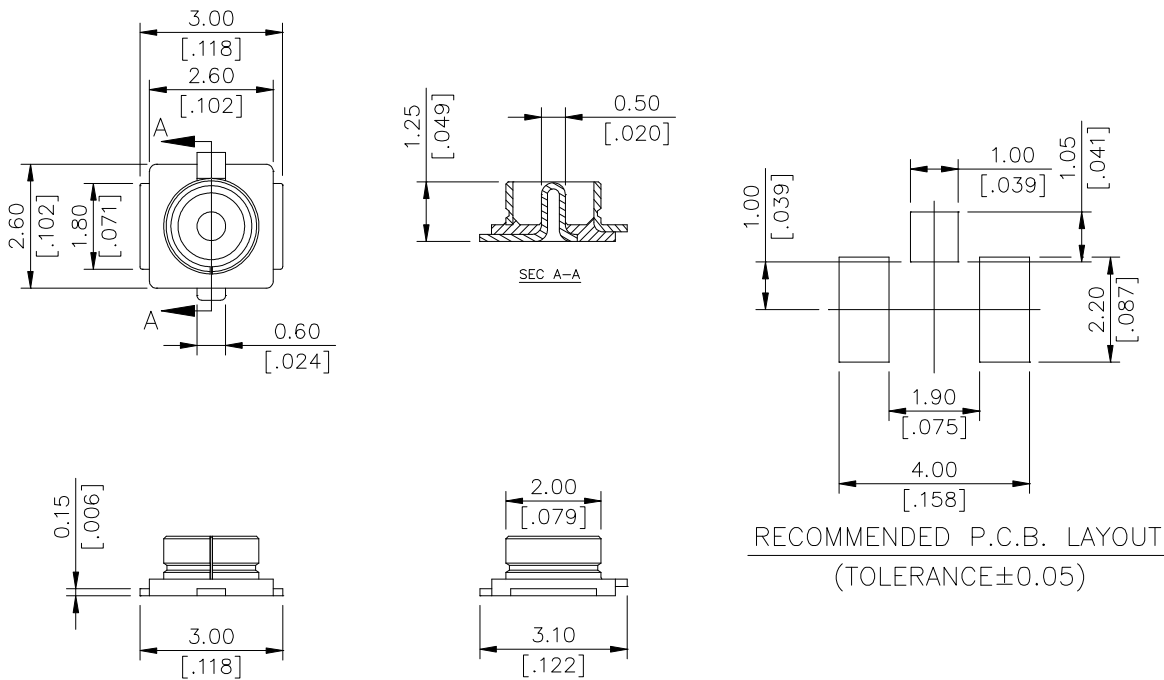

ORDERING INFORMATION

- HD9601*—**
- SHELL PLATING OPTION
 - NONE: SILVER PLATING
 - T2: GOLD PLATING
 - * F= GOLD FLASH WITH RoHS COMPLIANCE
 - 3= 30u" GOLD PLATED
 - 7= 15u" GOLD PLATED