


BERYLLIUM OXIDE RESISTORS AND TERMINATIONS

RESISTOR		TERMINATION		POWER (Watts, CW)	CAPACITANCE (pF)	FREQUENCY (GHz)	VSWR (Max.)
MODEL NUMBER	OUTLINE	MODEL NUMBER	OUTLINE				
"B" SERIES (FLANGE)							
B10A-R1	R1	B10B-T1L	T1L	10	0.75	4	1.25:1
B10B-R1	R1	B10B-T1C	T1C	10	0.75	4	1.25:1
B10B-R2	R2	B10B-T1R	T1R	10	0.75	4	1.25:1
B10A-R2	R2	B10B-T2	T2	10	0.75	4	1.25:1
B20A-R22	R22	B20B-T22	T22	20	0.5	12	1.25:1
B20A-R3	R3	B20B-T3L	T3L	20	1.2	6	1.25:1
B20B-R3	R3	B20B-T3C	T3C	20	1.2	6	1.25:1
		B20B-T3R	T3R	20	1.2	6	1.25:1
B40A-R4	R4	B40B-T4	T4	40	1.4	3	1.25:1
B40A-R5	R5	B40B-T5	T5	40	1.4	3	1.25:1
B50A-R6	R6	B50B-T6L	T6L	50	3.5	3	1.30:1
		B50B-T6R	T6R	50	3.5	3	1.30:1
B75A-R7	R7	B75B-T7	T7	75	1	1.5	1.40:1
B100A-R8	R8	B100B-T8	T8	100	1.5	6	1.20:1
B150A-R9	R9	B150B-T9	T9	150	3.2	2	1.35:1
B150A-R10	R10	B150B-T10	T10	150	3.2	2	1.35:1
B150A-R11	R11	B150B-T11	T11	150	3.5	3	1.30:1
B150D-R11	R11			150	3.5	3	1.30:1
B250A-R12	R12			250	3.1	3	1.30:1
B250B-R12	R12	B250B-T12	T12	250	3.1	3	1.30:1
B400A-R13	R13	B400B-T13	T13	400	9	1	1.70:1
B500A-R14	R14	B500B-T14	T14	500	9	1	1.25:1
B800A-R15	R15	B800B-T15	T15	800	14	1	2.00:1
"B" SERIES (FLANGELESS)							
B30B-R16	R16	B30B-T16	T16	30	1.2	3	1.25:1
B30A-R16	R16	B30A-T16	T16	30	1.2	3	1.25:1
B30D-R16	R16			30	0.25	3	1.25:1
		B30B-TC	TC	30	0.65	4	1.25:1
B40A-R17	R17	B40B-T17	T17	40	1.2	6	1.25:1
B40B-R17	R17			40	1.2	6	1.25:1
B125A-R18	R18	B125B-T18	T18	125	2.9	3	1.25:1
B150A-R19	R19	B150B-T19	T19	150	3.5	3	1.30:1
B200A-R20	R20	B200B-T20	T20	200	3.2	2	1.35:1
B300A-R21	R21			300	3.1	3	1.30:1
B300B-R21	R21	B300B-T21	T21	300	3.1	3	1.30:1

ORDERING INFORMATION

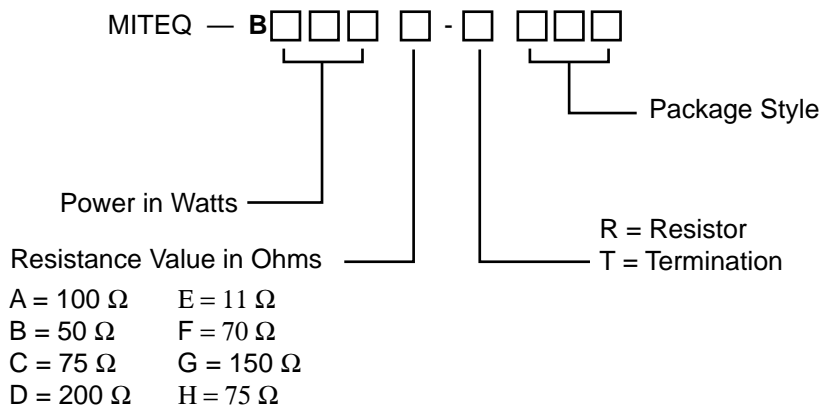

NOTE: Optional resistor values are available upon request. Please contact factory.