

**2.0Amp. Surface Mount Schottky Barrier Diodes****SK220SC-SK2150SC Series****Features**

- For surface mounted applications.
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Plastic material used carries Underwriters Laboratory Flammability Classification 94V-0
- Low leakage current
- High surge capability
- High temperature soldering: 250°C/10 seconds at terminals
- Exceeds environmental standards of MIL-S-19500/228

**Mechanical Data**

- Case: Molded plastic, SMC/JEDEC DO-214AB.
- Terminals: Solder plated, solderable per MIL-STD-750 method 2026
- Polarity: Indicated by cathode band.
- Mounting Position : Any.
- Weight: 0.195 gram, 0.00585 ounce

**Maximum Ratings and Electrical Characteristics**

(Rating at 25°C ambient temperature unless otherwise specified. )


Parameter	Symbol	Type					Units
		SK220	SK240	SK260	SK2100	SK2150	
Repetitive peak reverse voltage	V <sub>RRM</sub>	20	40	60	100	150	V
Maximum RMS voltage	V <sub>RMS</sub>	14	28	42	70	105	V
Maximum DC blocking voltage	V <sub>R</sub>	20	40	60	100	150	V
Maximum instantaneous forward voltage, I <sub>F</sub> =2A	V <sub>F</sub>	0.50		0.7	0.85	0.9	V
Average forward rectified current	I <sub>O</sub>	2					A
Peak forward surge current @8.3ms single half sine wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	50					A
Maximum DC reverse current V <sub>R</sub> =V <sub>RRM</sub> , T <sub>A</sub> =25°C V <sub>R</sub> =V <sub>RRM</sub> , T <sub>A</sub> =125°C	I <sub>R</sub>			0.5 10			mA mA
Maximum thermal resistance, Junction to ambient	R <sub>th,JA</sub>	55					°C/W
Maximum thermal resistance, Junction to lead	R <sub>th,JL</sub>	20 (Note)					
Diode junction capacitance @ f=1MHz and applied 4VDC reverse voltage	C <sub>J</sub>	170(typ)					pF
Storage temperature	T <sub>stg</sub>	-55 ~ +150					°C
Operating temperature	T <sub>J</sub>	-55 ~ +125		-55 ~ +150			°C

Note : Measure on PCB with 0.2"×0.2"(5mm×5mm) copper pad area.




**Characteristic Curves**


Forward Current Derating Curve

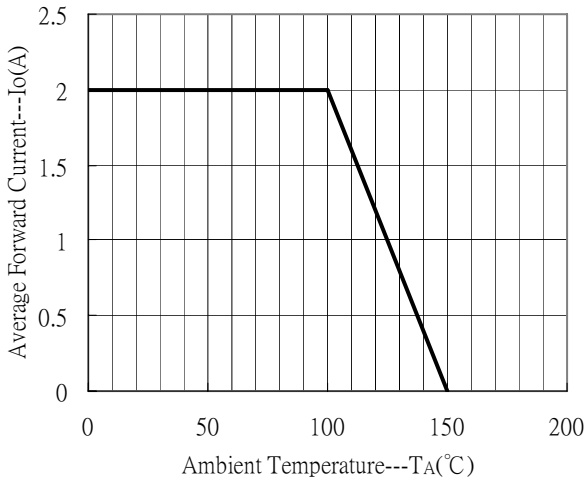


Maximum Non-Repetitive Forward Surge Current

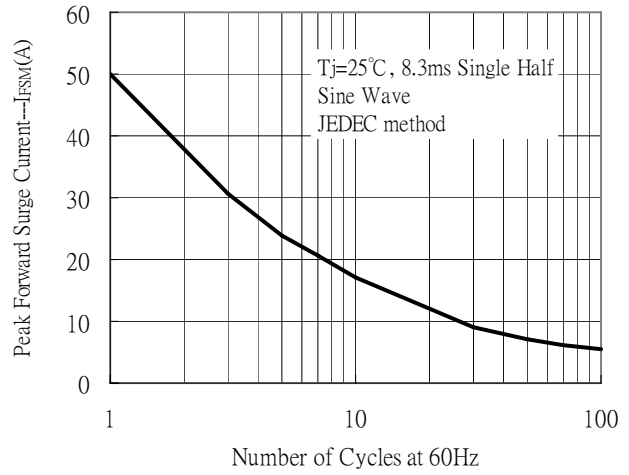


Forward Current vs Forward Voltage

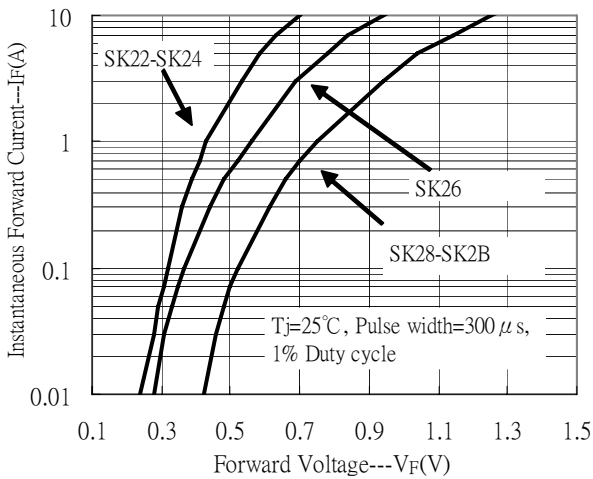

Junction Capacitance vs Reverse Voltage

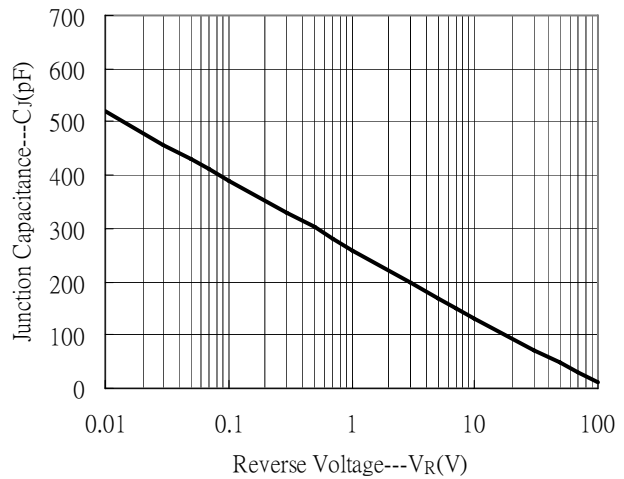

Reverse Leakage Current vs Reverse Voltage

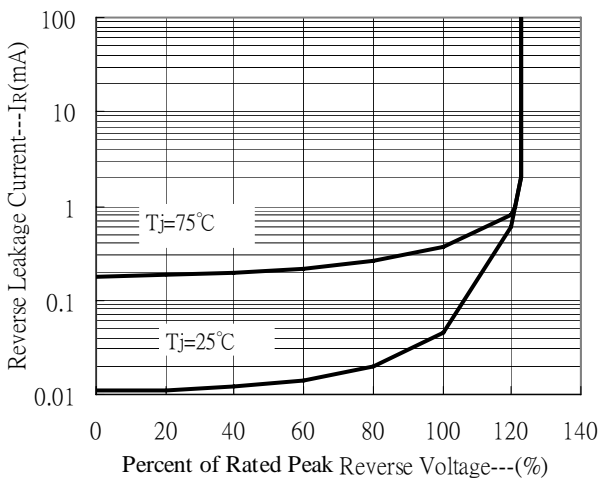




**Ordering Information**

Device	Package	Shipping	Marking
SK220SC	SMC	3000 pcs / Tape & Reel	SK22
SK240SC	SMC	3000 pcs / Tape & Reel	SK24
SK260SC	SMC	3000 pcs / Tape & Reel	SK26
SK2100SC	SMC	3000 pcs / Tape & Reel	S210
SK2150SC	SMC	3000 pcs / Tape & Reel	S215


**Recommended temperature profile for IR reflow**

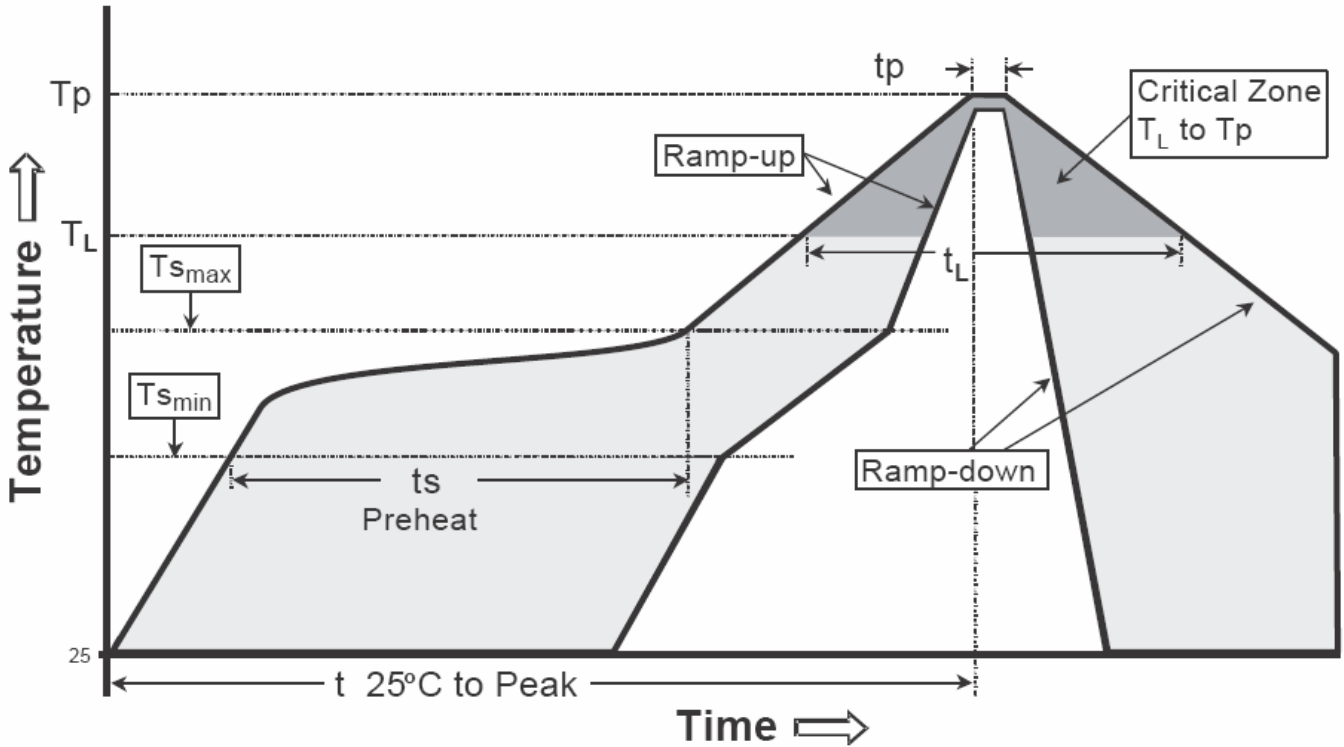

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(Ts min)	100°C	150°C
-Temperature Max(Ts max)	150°C	200°C
-Time(ts min to ts max)	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (Tl)	183°C	217°C
- Time (tL)	60-150 seconds	60-150 seconds
Peak Temperature(Tp)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

**DO-214AB/SMC Dimension**

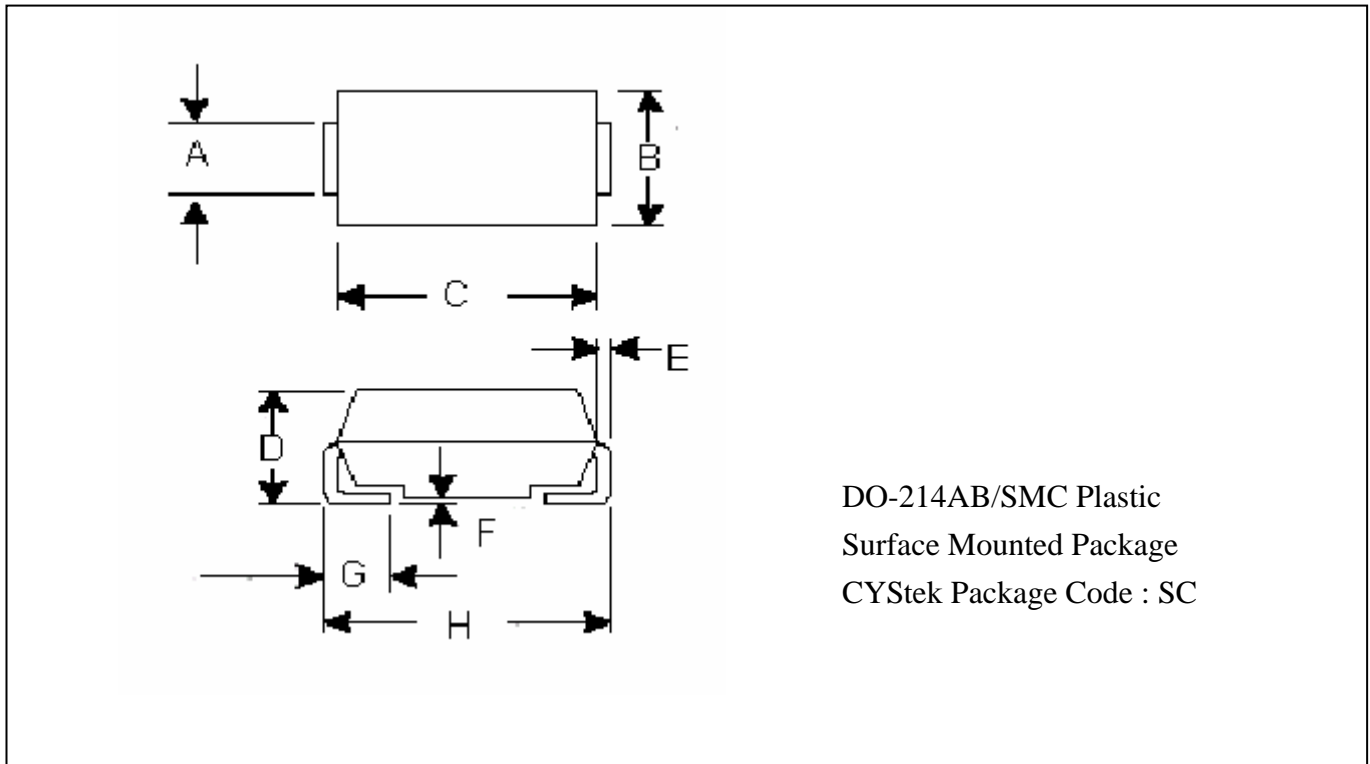

\*:Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.114	0.126	2.90	3.20	E	0.006	0.012	0.15	0.31
B	0.220	0.245	5.59	6.22	F	0.004	0.008	0.10	0.20
C	0.260	0.280	6.60	7.11	G	0.030	0.060	0.76	1.52
D	0.078	0.103	1.98	2.62	H	0.305	0.320	7.75	8.13

**Notes :** 1.Controlling dimension : millimeters.  
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.  
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

**Material :**

- Lead : Pure tin plated.
- Mold Compound : Epoxy resin family, flammability solid burning class:UL94V-0.

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.