

### **SPECIFICATIONS**

## SSI POWER CONNECTOR

Mechanical

Contact Retention Force: 1.33Kg(2.93Lb)min.

Durability: 100 Cycles

**Electrical** 

**Voltage Rating:** 500V **Current Rating:** 30A

Contact Resistance:  $20m\Omega$  max.

Dielectrical Withstanding Voltage: 2500VDC(P),1000VDC(S)

**Insulation Resistance:**  $500M\Omega$  min.


**Physical** 

**Housing:** HTN, UL 94-0, Black **Contact:** Phosphor Bronze


**Plating:** See "ORDERING INFORMATION" **Operating Temperature:**  $-20^{\circ}$  to  $+85^{\circ}$ 

# SSI POWER CONNECTOR

SSI Power Series, SSI Power 6Px24S Type, 2.54mm Pitch



#### **DRAWING**

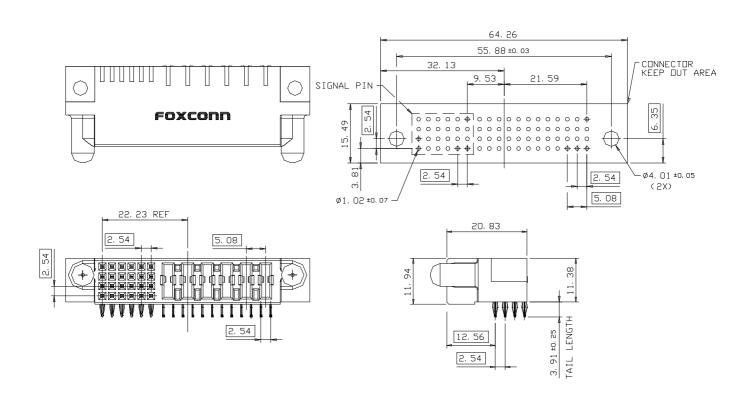

## ORDERING INFORMATION

