


TO-247AD (TO-3P)

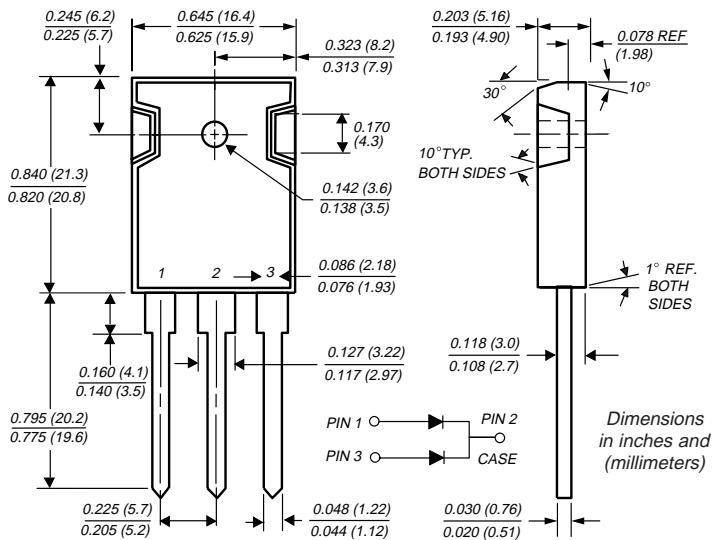

Features

- Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
 - Dual rectifier construction, positive center-tap
 - Metal silicon junction, majority carrier conduction
 - Low power loss, high efficiency
 - High current capability, low forward voltage drop
 - High surge capability
 - For use in low voltage, high frequency inverters, free-wheeling, and polarity protection applications
 - Guardring for overvoltage protection
 - High temperature soldering guaranteed:
250°C/10 seconds, 0.17" (4.3mm) from case

Mechanical Data

Case: JEDEC TO-247AD molded plastic body

Terminals: Lead solderable per MIL-STD-750, Method 2026

Polarity: As marked **Mounting Position:** Any

Mounting Torque: 10 in-lbs max.

Weight: 0.2oz., 5.6g

Maximum Ratings & Thermal Characteristics

• Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	MBR3035PT	MBR3045PT	MBR3050PT	MBR3060PT	Unit		
Maximum repetitive peak reverse voltage	V _{RRM}	35	45	50	60	V		
Maximum working peak reverse voltage	V _{RWM}	35	45	50	60	V		
Maximum DC blocking voltage	V _{DC}	35	45	50	60	V		
Maximum average forward rectified current (See Fig. 1)	I _{F(AV)}	30				A		
Peak repetitive forward current per leg at T _C = 105°C (rated V _R , square wave, 20 KHz)	I _{FRM}	30				A		
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	200				A		
Peak repetitive reverse surge current ⁽¹⁾	I _{RRM}	2.0		1.0		A		
Thermal resistance from junction to case per leg	R _{θJC}	1.4				°C/W		
Voltage rate of change at (rated V _R)	dV/dt	10,000				V/μs		
Operating junction temperature range	T _J	-65 to +150				°C		
Storage temperature range	T _{STG}	-65 to +175				°C		

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	MBR3035PT	MBR3045PT	MBR3050PT	MBR3060PT	Unit
Maximum instantaneous forward voltage per leg at: ⁽²⁾		–	–	0.75	0.65	
IF = 20A, T _c = 25°C		–	0.60	–	–	
IF = 20A, T _c = 125°C	V _F	0.60	–	–	–	V
IF = 30A, T _c = 25°C		0.76	–	–	–	
IF = 30A, T _c = 125°C		0.72	–	–	–	
Maximum instantaneous reverse current at rated DC blocking voltage per leg ⁽²⁾	I _R	1.0	60	5.0	100	mA
T _c = 25°C		–	–	–	–	
T _c = 125°C		–	–	–	–	

Notes: (1) 2.0 μ s pulse width, f = 1.0 KHz

(2) Pulse test: 300 μ s pulse width, 1% duty cycle

Dual Schottky Rectifiers

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

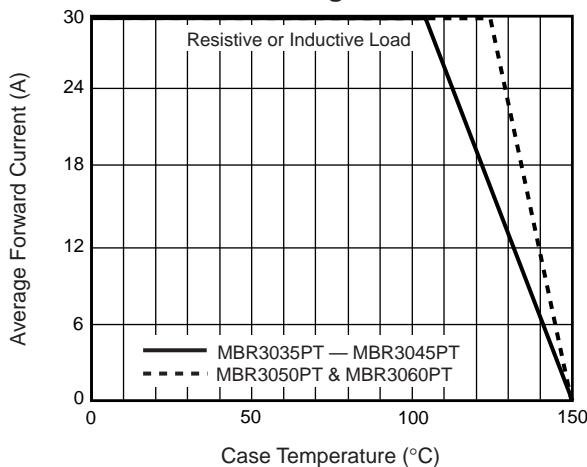


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current Per Leg

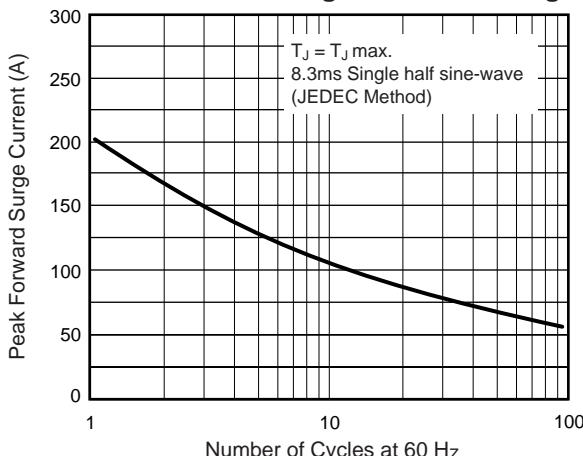


Fig. 3 – Typical Instantaneous Forward Characteristics Per Leg

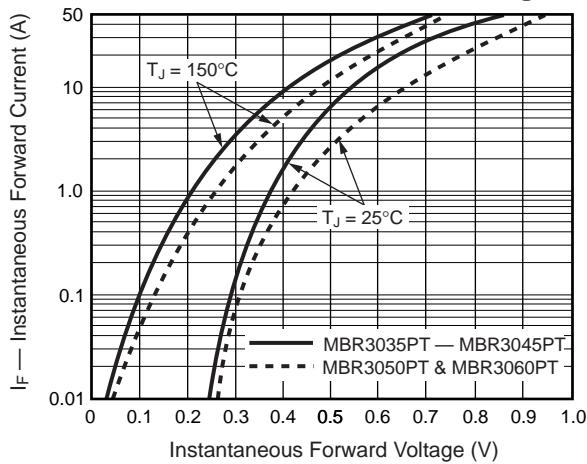


Fig. 4 – Typical Reverse Characteristics Per Leg

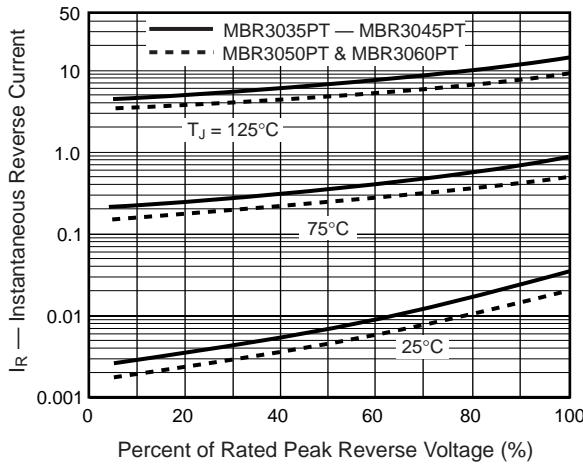


Fig. 5 – Typical Junction Capacitance Per Leg

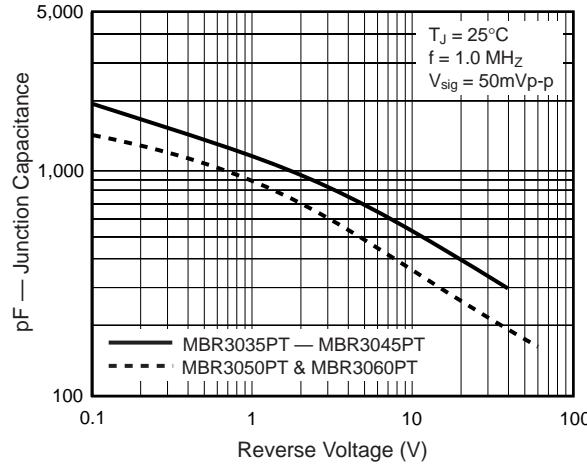


Fig. 6 – Typical Transient Thermal Impedance Per Leg

