July 2014

KSC5502D / KSC5502DT
NPN Triple Diffused Planar Silicon Transistor

Features

- High Voltage Power Switch Switching Application
- Wide Safe Operating Area
- Built-in Free-Wheeling Diode
- Suitable for Electronic Ballast Application
- Small Variance in Storage Time
- Two Package Choices : D-PAK or TO-220

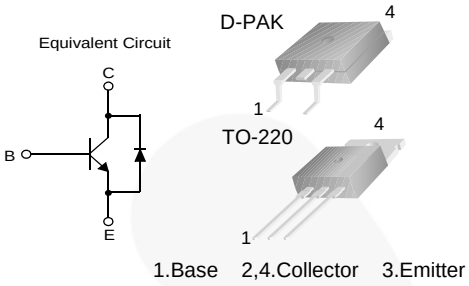

Ordering Information

Part Number	Top Mark	Package	Packing Method
KSC5502DTM	C5502D	TO-252 3L (DPAK)	Tape and Reel
KSC5502DTTU	C5502D	TO-220 3L	Rail

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at T_C = 25°C unless otherwise noted.

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	1200	V
V_{CEO}	Collector-Emitter Voltage	600	V
V_{EBO}	Emitter-Base Voltage	12	V
I_C	Collector Current (DC)	2	A
I_{CP}	Collector Current (Pulse)(1)	4	A
I_B	Base Current (DC)	1	A
I_{BP}	Base Current (Pulse)(1)	2	A
T_J	Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-65 to 150	°C
EAS	Avalanche Energy (T_J = 25°C)	2.5	mJ

Note:

1. Pulse test: Pulse width = 5 ms, duty cycle ≤ 10%.

© 2000 Fairchild Semiconductor Corporation

Thermal Characteristics

Values are at T_C = 25°C unless otherwise noted.

Symbol	Parameter	KSC5502D (D-PAK)	KSC5502DT (TO-220)	Unit
P_C	Collector Dissipation (T_C = 25°C)	87.83	118.16	W
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.42	1.06	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	111.0	62.5	°C/W
T_L	Maximum Lead Temperature for Soldering Purpose: 1/8 inch from Case for 5 seconds	270		°C

Electrical Characteristics

Values are at T_C = 25°C unless otherwise noted.

Symbol	Parameter	Conditions		Min.	Typ.	Max.	Unit
BV_{CBO}	Collector-Base Breakdown Voltage	I_C = 1 mA, I_E = 0		1200	1350		V
BV_{CEO}	Collector-Emitter Breakdown Voltage	I_C = 5 mA, I_B = 0		600	750		V
BV_{EBO}	Emitter-Base Breakdown Voltage	I_E = 500 µA, I_C = 0		12.0	13.7		V
I_{CES}	Collector Cut-off Current	V_{CES} = 1200 V, V_{BE} = 0	T_C = 25°C			100	µA
			T_C = 125°C			500	
I_{CEO}	Collector Cut-off Current	V_{CE} = 600 V, I_B = 0	T_C = 25°C			100	µA
			T_C = 125°C			500	
I_{EBO}	Emitter Cut-off Current	V_{EB} = 12 V, I_C = 0	T_C = 25°C			10	µA
h_{FE}	DC Current Gain	V_{CE} = 1 V, I_C = 0.2 A	T_C = 25°C	15	28	40	
			T_C = 125°C	8	18		
		V_{CE} = 1 V, I_C = 1 A	T_C = 25°C	4.0	6.4		
			T_C = 125°C	3.0	4.7		
		V_{CE} = 2.5 V, I_C = 0.5 A	T_C = 25°C	12	20	30	
			T_C = 125°C	6	12		
V_{CE}(sat)	Collector-Emitter Saturation Voltage	I_C = 0.2 A, I_B = 0.02 A	T_C = 25°C		0.31	0.80	V
			T_C = 125°C		0.54	1.10	
		I_C = 0.4 A, I_B = 0.08 A	T_C = 25°C		0.15	0.60	
			T_C = 125°C		0.23	1.00	
		I_C = 1 A, I_B = 0.2 A	T_C = 25°C		0.40	1.50	
			T_C = 125°C		1.30	3.00	
V_{BE}(sat)	Base-Emitter Saturation Voltage	I_C = 0.4 A, I_B = 0.08 A	T_C = 25°C		0.77	1.00	V
			T_C = 125°C		0.60	0.90	
		I_C = 1 A, I_B = 0.2 A	T_C = 25°C		0.83	1.20	
			T_C = 125°C		0.70	1.00	
C_{ib}	Input Capacitance	V_{EB} = 8 V, I_C = 0, f = 1 MHz			385	500	pF
C_{ob}	Output Capacitance	V_{CB} = 10 V, I_E = 0, f = 1 MHz			60	100	pF
f_T	Current Gain Bandwidth Product	I_C = 0.5 A, V_{CE} = 10 V			11		MHz
V_F	Diode Forward Voltage	I_F = 0.2 A	T_C = 25°C		0.75	1.20	V
			T_C = 125°C		0.59		
		I_F = 0.4 A	T_C = 25°C		0.80	1.30	
			T_C = 125°C		0.64		
		I_F = 1 A	T_C = 25°C		0.90	1.50	

© 2000 Fairchild Semiconductor Corporation

Electrical Characteristics

Values are at T_C = 25°C unless otherwise noted.

Symbol	Parameter	Conditions		Min	Typ.	Max.	Unit
t_{fr}	Diode Froward Recovery Time (di/dt=10 A/µs)	I_F = 0.2 A			650		ns
		I_F = 0.4 A			740		
		I_F = 1 A			785		
V_{CE}(DSAT)	Dynamic Saturation Voltage	I_C = 0.4 A, I_{B1} = 80 mA, V_{CC} = 300 V	at 1 µs		7.2		V
			at 3 µs		1.8		
		I_C = 1 A, I_{B1} = 200 mA, V_{CC} = 300 V	at 1 µs		18.0		
			at 3 µs		6.0		
Resistive Load Switching (D.C < 10%, Pulse Width = 20 s)							
t_{ON}	Turn-On Time	I_C = 0.4 A, I_{B1} = 80 mA, I_{B2} = 0.2 A, V_{CC} = 300 V, R_L = 750 Ω	T_C = 25°C		175	350	ns
			T_C = 125°C		185		
t_{OFF}	Turn-Off Time		T_C = 25°C		2.1	3.0	µs
			T_C = 125°C		2.6		
t_{ON}	Turn-On Time	I_C = 1 A, I_{B1} = 160 mA, I_{B2} = 160 mA, V_{CC} = 300 V, R_L = 300 Ω	T_C = 25°C		240	450	ns
			T_C = 125°C		310		
t_{OFF}	Turn-Off Time		T_C = 25°C		3.7	5.0	µs
			T_C = 125°C		4.5		
Inductive Load Switching (V_{CC} = 15 V)							
t_{STG}	Storage Time	I_C = 0.4 A, I_{B1} = 80 mA, I_{B2} = 0.2 A, V_Z = 300 V, L_C = 200 H	T_C = 25°C		1.2	2.0	µs
			T_C = 125°C		1.5		
t_F	Fall Time		T_C = 25°C		90	200	ns
			T_C = 125°C		65		
t_C	Cross-Over Time		T_C = 25°C		185	350	ns
			T_C = 125°C		145		
t_{STG}	Storage Time	I_C = 0.8 A, I_{B1} = 160 mA, I_{B2} = 160 mA, V_{CC} = 300 V, L_C = 200 H	T_C = 25°C		3.30	4.50	µs
			T_C = 125°C		3.75		
t_F	Fall Time		T_C = 25°C		90	250	ns
			T_C = 125°C		160		
t_C	Cross-over Time		T_C = 25°C		300	600	ns
			T_C = 125°C		570		

© 2000 Fairchild Semiconductor Corporation

Typical Performance Characteristics

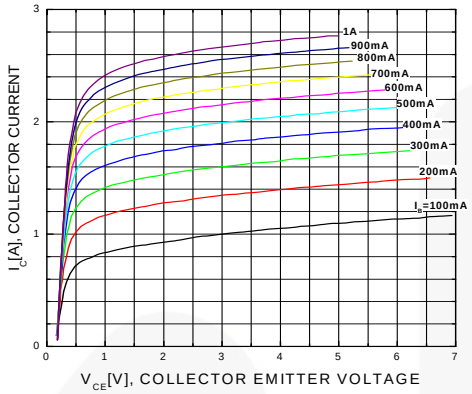

Figure 1. Static Characteristic

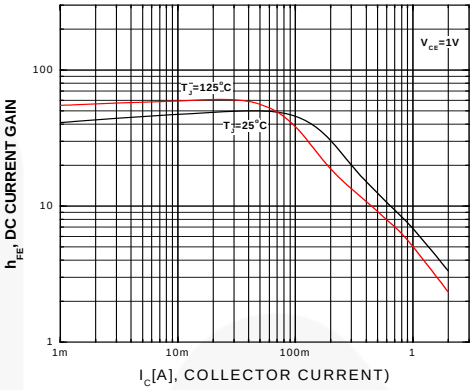

Figure 2. DC Current Gain

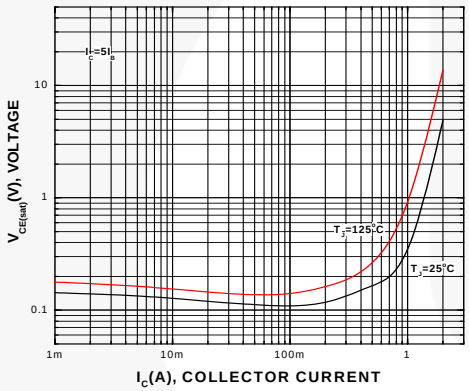

Figure 3. Collector-Emitter Saturation Voltage

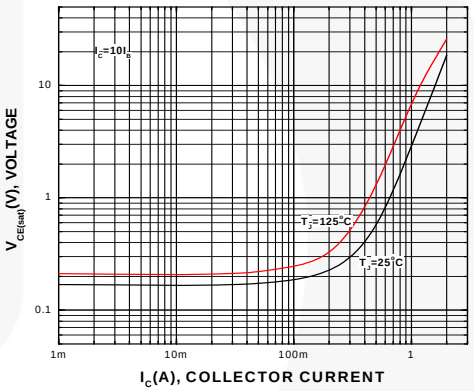

Figure 4. Collector-Emitter Saturation Voltage

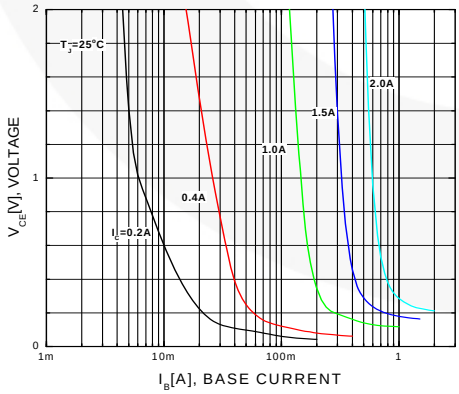

Figure 5. Typical Collector Saturation Voltage

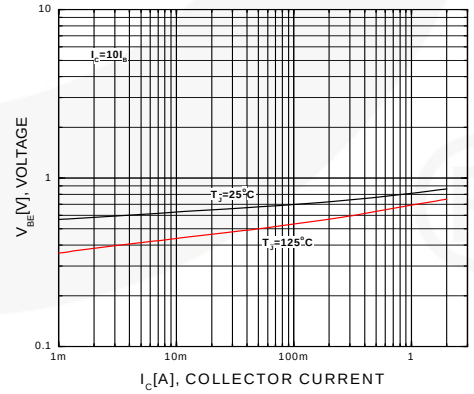

Figure 6. Base-Emitter Saturation Voltage

© 2000 Fairchild Semiconductor Corporation

Typical Performance Characteristics (Continued)

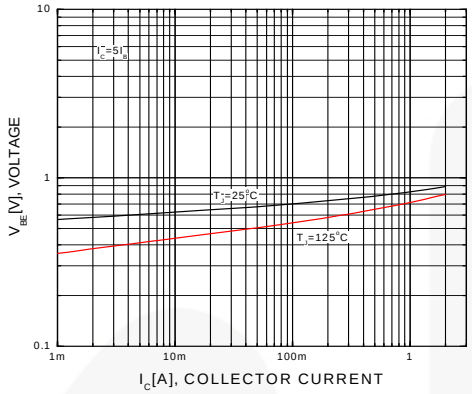

Figure 7. Base-Emitter Saturation Voltage

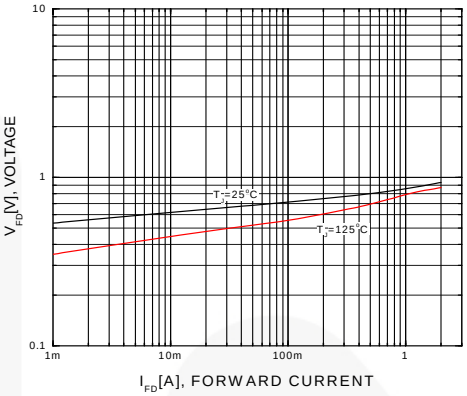

Figure 8. Diode Forward Voltage

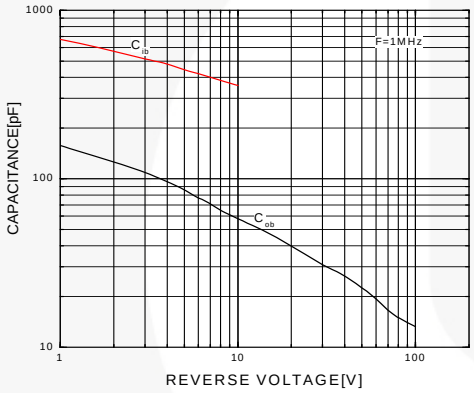

Figure 9. Collector Output Capacitance

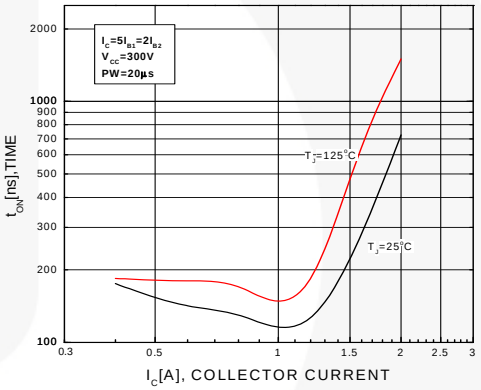

Figure 10. Resistive Switching Time, t_{on}

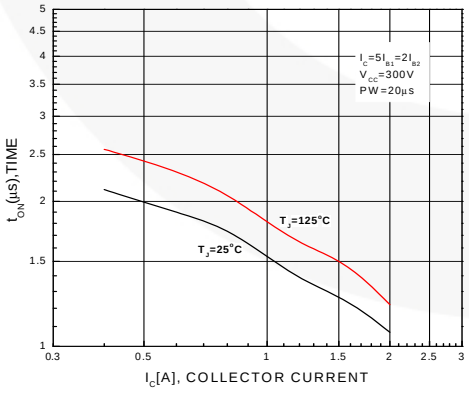

Figure 11. Resistive Switching Time, t_{off}

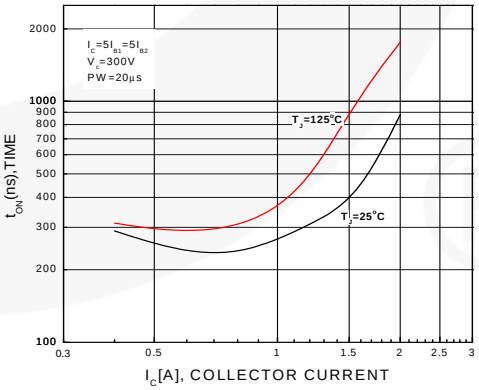

Figure 12. Resistive Switching Time, t_{on}

© 2000 Fairchild Semiconductor Corporation

Typical Performance Characteristics (Continued)

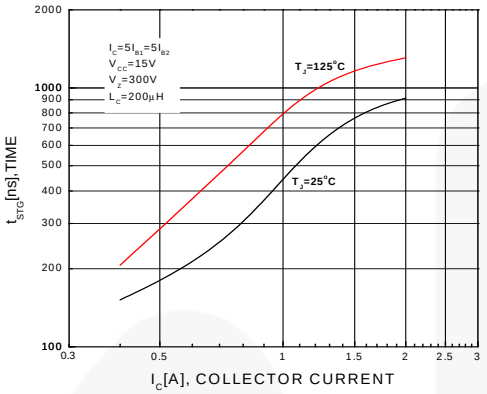

Figure 19. Inductive Switching Time, t_C

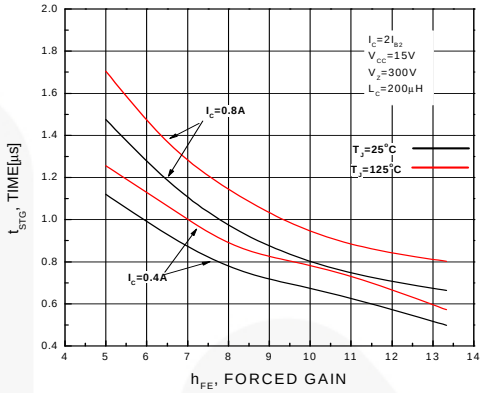

Figure 20. Inductive Switching Time, t_{STG}

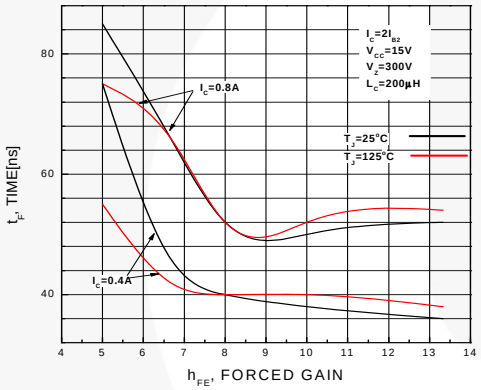

Figure 21. Inductive Switching Time, t_F

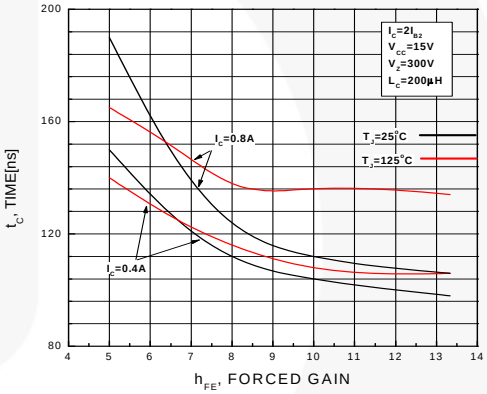

Figure 22. Inductive Switching Time, t_C

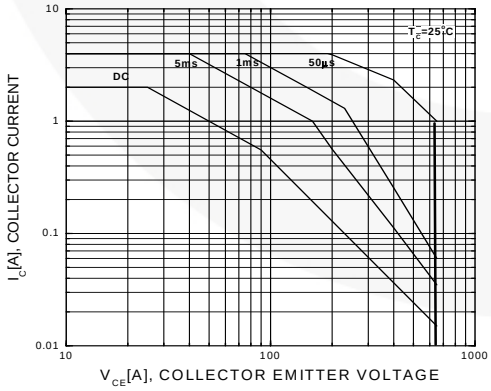

Figure 23. Forward Bias Safe Operating Area

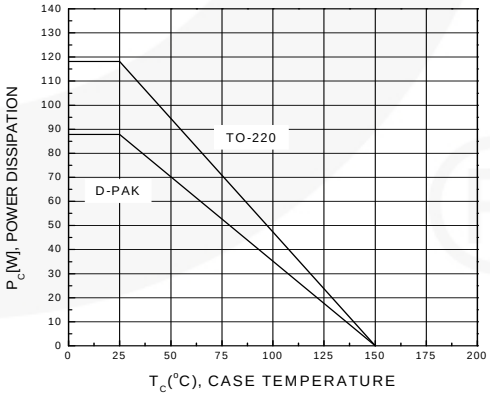

Figure 24. Power Derating

© 2000 Fairchild Semiconductor Corporation

Typical Performance Characteristics (Continued)

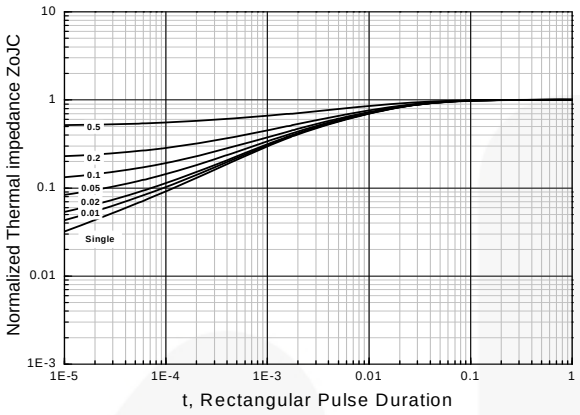

Figure 25. ZoJC, Transient Thermal Impedance (D-PAK)

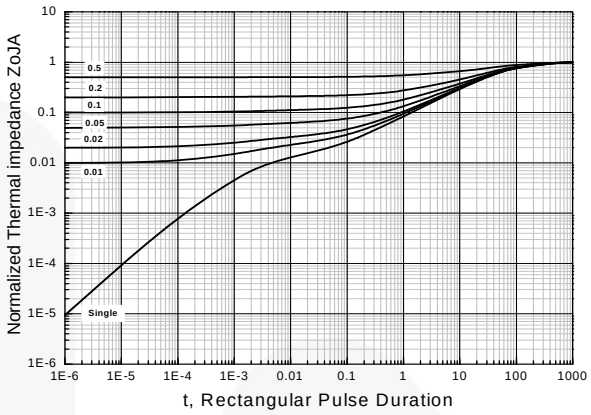

Figure 26. ZoJA, Transient Thermal Impedance (D-PAK)

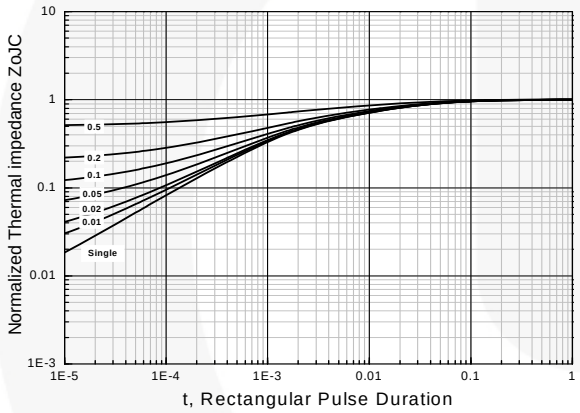

Figure 27. ZoJC, Transient Thermal Impedance (TO-220)

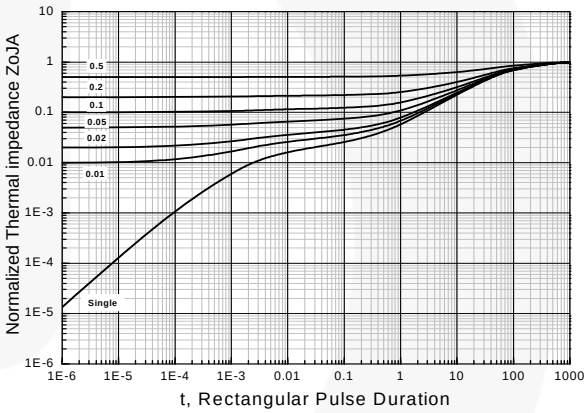

Figure 28. ZoJA, Transient Thermal Impedance (TO-220)

© 2000 Fairchild Semiconductor Corporation

Physical Dimensions

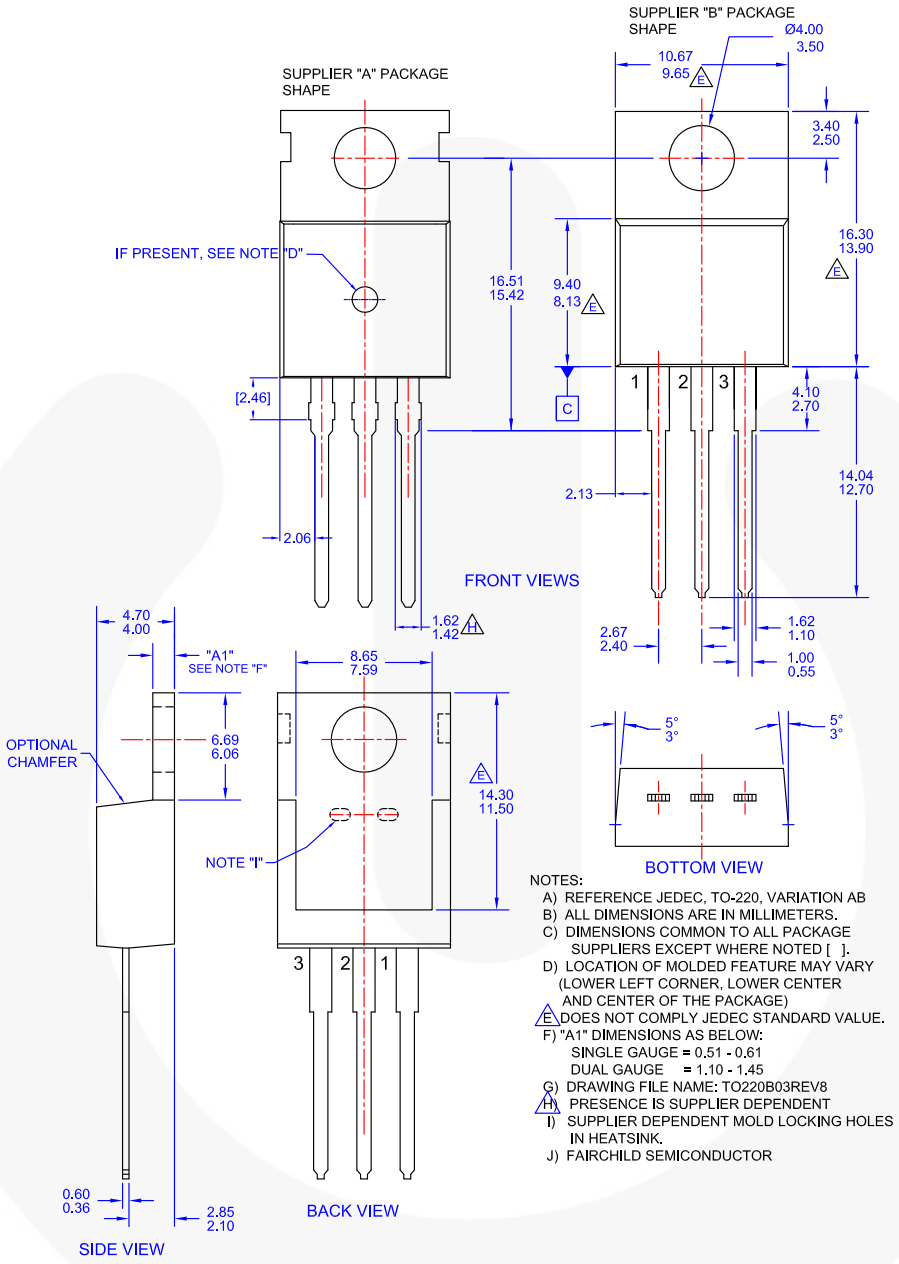

Figure 30. TO-220, MOLDED, 3LEAD, JEDEC VARIATION AB

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:
http://www.fairchildsemi.com/dwg/TO/TO220B03.pdf.

For current tape and reel specifications, visit Fairchild Semiconductor's online packaging area:
http://www.fairchildsemi.com/packing_dwg/PKG-TO220B03.pdf.

© 2000 Fairchild Semiconductor Corporation

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™
AX-CAP®*
BitSiC™
Build it Now™
CorePLUS™
CorePOWER™
CROSSVOLT™
CTL™
Current Transfer Logic™
DEUXPEED®
Dual Cool™
EcoSPARK®
EfficientMax™
ESBC™
F®
Fairchild®
Fairchild Semiconductor®
FACT Quiet Series™
FACT®
FAST®
FastvCore™
FETBench™
FPS™
F-PFS™
FRFET®
Global Power Resource℠
GreenBridge™
Green FPS™
Green FPS™ e-Series™
G*max*™
GTO™
IntelliMAX™
ISOPLANAR™
Making Small Speakers Sound Louder and Better™
MegaBuck™
MICROCOUPLER™
MicroFET™
MicroPak™
MicroPak2™
MillerDrive™
MotionMax™
mWSaver®
OptoHiT™
OPTOLOGIC®
OPTOPLANAR®
PowerTrench®
PowerXS™
Programmable Active Droop™
QFET®
QS™
Quiet Series™
RapidConfigure™
™
Saving our world, 1mW/W/kW at a time™
SignalWise™
SmartMax™
SMART START™
Solutions for Your Success™
SPM®
STEALTH™
SuperFET®
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SupreMOS®
SyncFET™
Sync-Lock™
SYSTEM GENERAL®*
TinyBoost®
TinyBuck®
TinyCalc™
TinyLogic®
TINYOPTO™
TinyPower™
TinyPWM™
TinyWire™
TranSiC™
TriFault Detect™
TRUECURRENT®*
μSerDes™
SerDes
UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™
VoltagePlus™
XS™
仙童™

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. I68

© Fairchild Semiconductor Corporation