


RECOMMENDED P.C.B. LAYOUT




CONTACT CONFIGURATION


SPDT

NOTES:


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.XX=±0.4
X.XXX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3 AMPS RESISTIVE LOAD @ 120 VAC OR 28VDC
1 AMPS RESISTIVE LOAD @ 250VAC
5. FIXED AND MOVING CONTACTS:
COPPER ALLOY W/ SILVER PLATING
6. ELECTRICAL LIFE: 30,000 ACTUATIONS AT FULL LOAD
7. INSULATION RESISTANCE: 1,000MΩ MIN.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C.
10. ▲ DENOTES CRITICAL PARAMETER.

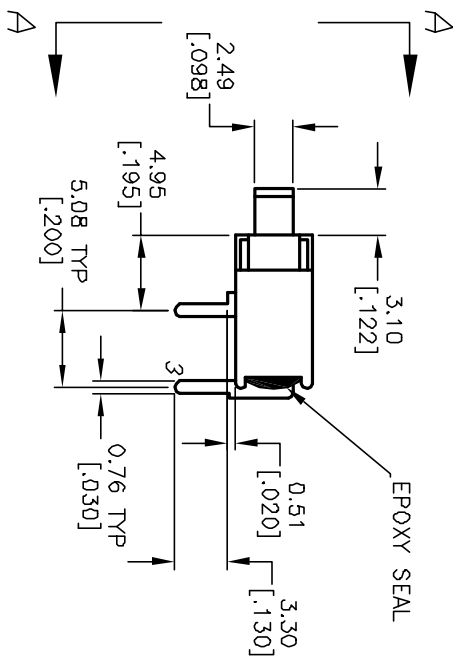

VIEW A-A

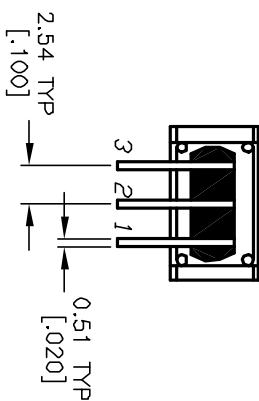

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	DN	DN	
DN	DN	DN	
2-1	DF-F	DN	
	DPE-N	2-3	

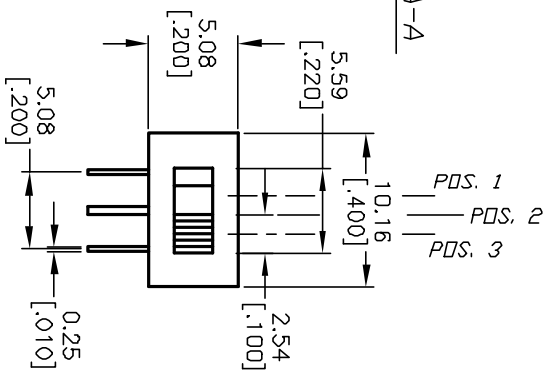

A		13165	RELEASED FOR PRODUCTION	5/28/03	AR	TITLE				
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	500ASSP3M6QE				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						2:1	DATE	DR	DWG	REV
						5/28/03	AR	T551305	A	

E-SWITCH®