


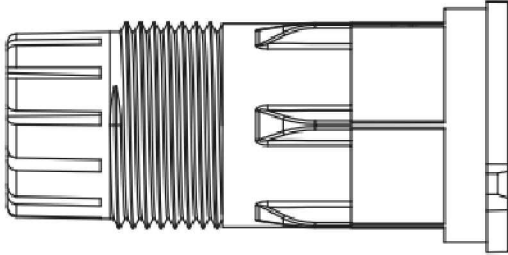

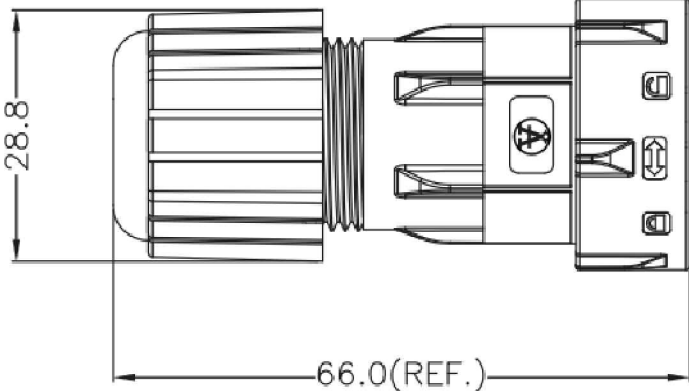
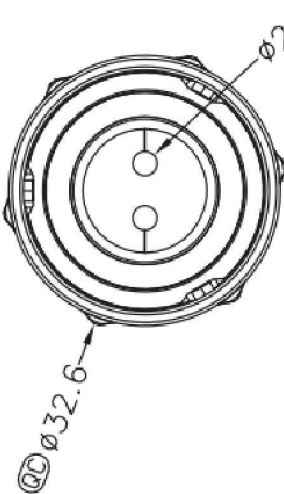


	1	2	3	4	5	6	7		
A								A	
B								B	
C	Seals Nut	Seals	Bayonet Nut	Clamp Ring	Gasket			C	
D					Material: <ul style="list-style-type: none"> • Waterproof Rate: IP67 • Cable OD: Ø2.5~Ø2.8MM Max. • Clamp Ring: PPO, UL94V-0, Black • Bayonet Nut: PPO, UL94V-0, Black • Sealing Nut: Nylon+GF, UL94-V, Black • Seals: Silicone, UL94V, Gray • Gasket: Silicone, UL94V-0, Gray 			D	
E								E	
F								F	
G	RoHS compliant Unit:mm		Scale	1:1			Date	Name	Customer-No.
			TOLERANCE			Drawn	08.01.2014	Joanna	
			X.			Approved	08.01.2014	Joanna	ASSMANN WSW-No.
			X.X						A-FB-00BLMA-LL1
			X.XX						Drawing-No.
H			DIM	TOL					ASS 7038 CA
			X. °						rev00
			Angle	TOL	Id.	Modification	Date	Name	Sheet
	1	2	3	4	5	6	7		

