
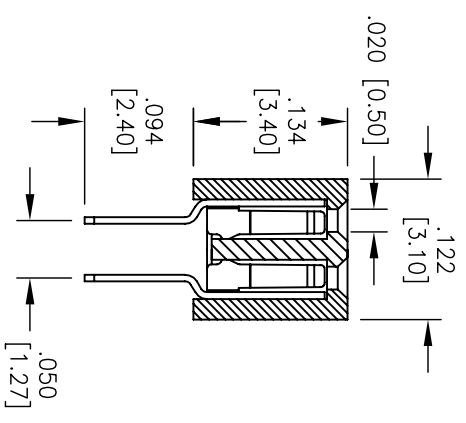
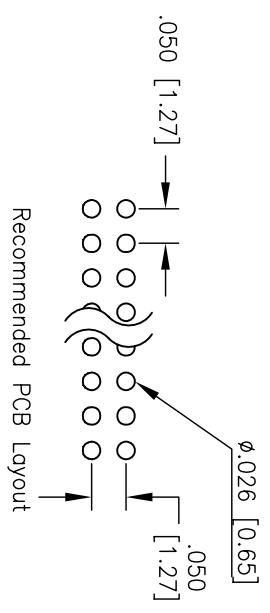
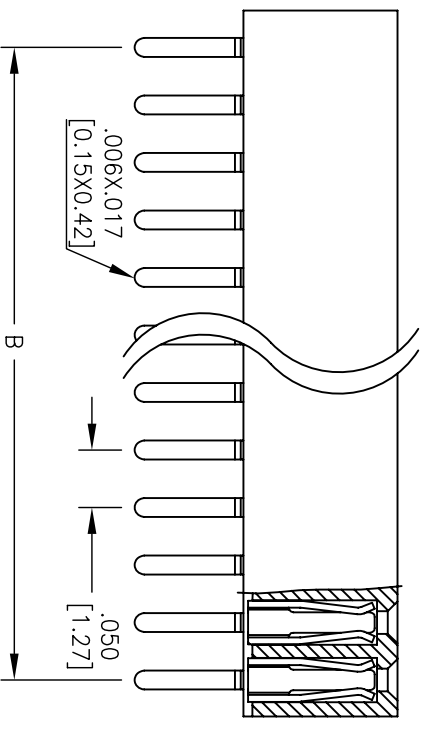


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/17/08	

APPROVED: _____
 DATE: _____ TITLE: _____

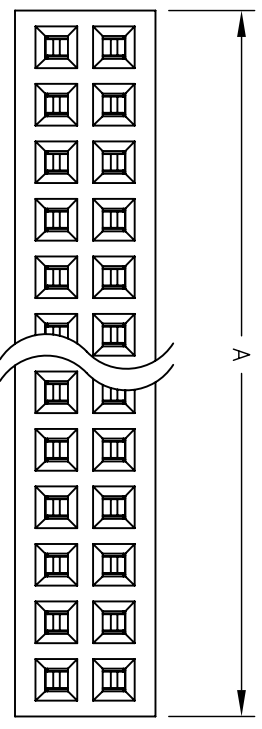

A = .050 [1.27] X No. of Positions + .014 [0.35]
 B = .050 [1.27] X No. of Spaces

SPECIFICATIONS:

- Material: Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Gold Flash over nickel underplate
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 1 Amp max
 - Contact resistance: 20 mohms max
 - Insulation resistance: 5000 Mohms min @ 500 VDC
 - Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating:
 - Operating temperature: -40°C to +105°C
- Environmental:
 - Lead free, RoHS compliant.
 - Recommended soldering temp: 235°C for 5 sec.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

APPROVALS

DRAWN	DY	7/17/08
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .050" RECEPTACLE STRIP, DUAL ROW,
 .134" INSULATOR HEIGHT, GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-2E-XX-G	-
REF:	SCALE: NIS	SHEET 1 OF 1