

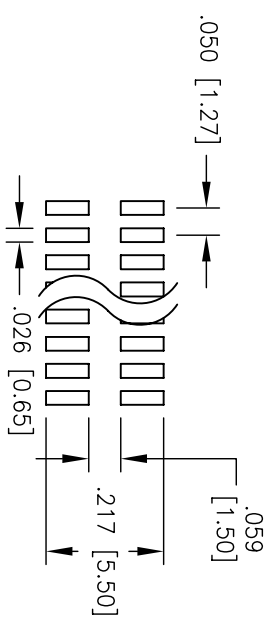
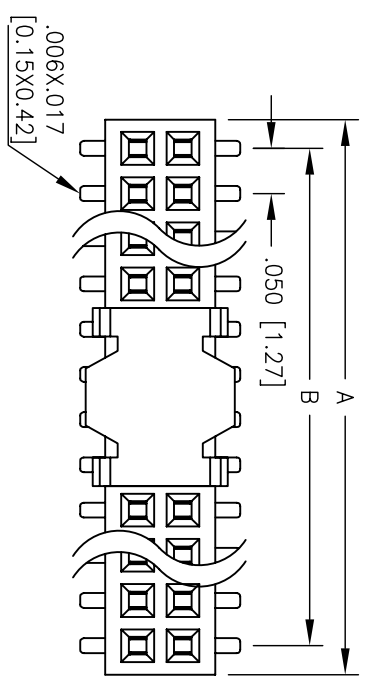


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/17/08	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

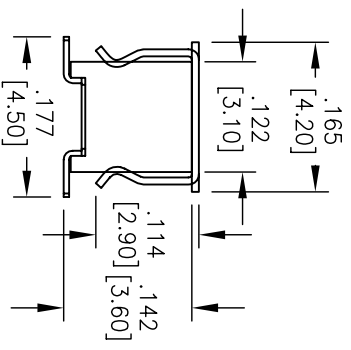

Recommended PCB Layout

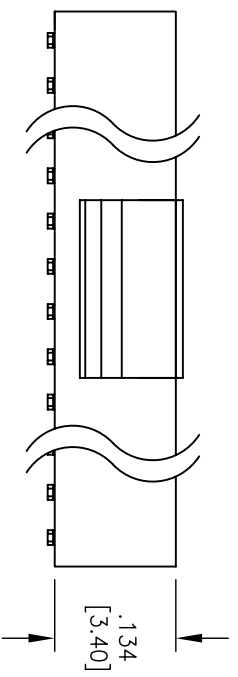

NOTE: PACKAGED ON TAPE & REEL

A = .050 [1.27] X No. of Positions + .014 [0.35]  
 B = .050 [1.27] X No. of Spaces

**SPECIFICATIONS:**

- Material: Insulator: Nylon 46, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tail.
- Electrical: Operating voltage: 250 VAC max  
 Current rating: 1 Amp max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 5000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant.  
 Recommended soldering temp: 260°C for 5 sec.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
X .XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	7/17/08
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" RECEPTACLE STRIP, DUAL ROW, SMT  
 .134" INSULATOR HEIGHT, SEL GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-2E-XX-SG-SMT-PP-T/R	-
REF:	SCALE: NTS	SHEET 1 OF 1

