



## Infrared Laser Diode

*808nm 500mW High Power Operation*

*TENTATIVE*

### • Features



1. Low operation current
2. High pumping efficiency
3. Stable wavelength
4. High reliability

### • Applications

1. Pumping source for DPSS green laser
2. Medical applications

### • Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P <sub>O</sub>	CW	510	mW
Reverse voltage (LD)	V <sub>RL</sub>		2	V
Reverse voltage (PD)	V <sub>RD</sub>		30	V
Forward current (PD)	I <sub>FD</sub>		10	mA
Case temperature	T <sub>C</sub>	-	-10~+50	°C
Storage temperature	T <sub>S</sub>	-	-40~+85	°C

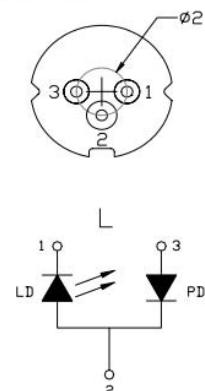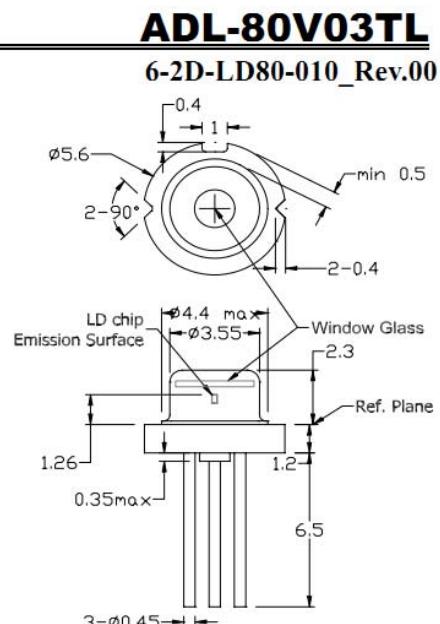

### • Electrical and optical characteristics (T<sub>c</sub>=25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions (CW)
Peak wavelength	λ	805	808	811	nm	
Threshold current	I <sub>th</sub>	-	120		mA	
Operating current	I <sub>op</sub>	-	570		mA	
Operating voltage	V <sub>op</sub>	-	1.9	2.1	V	
Differential efficiency	η	0.8	1.2	-	mW/mA	P <sub>s</sub> =400-500mW
Parallel divergence angle	θ <sub>  </sub>	-	8	11	deg	
Monitor current - L type	I <sub>M</sub>	1.2	1.7	3	mA	
Perpendicular divergence angle	θ <sub>⊥</sub>	-	39	48	deg	
Parallel FFP deviation angle	Δθ <sub>  </sub>	-3	0	+3	deg	P <sub>s</sub> =500mW
Perpendicular FFP deviation angle	Δθ <sub>⊥</sub>	-5	0	+5	deg	
Emission point accuracy	Δx Δy Δz	-80	0	+80	um	

### • Precautions

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.



**ROITHNER LASERTECHNIK** GmbH

WIEDNER HAUPTSTRASSE 76      1040 VIENNA      AUSTRIA  
TEL. +43 1 586 52 43 -0, FAX. -44, OFFICE@ROITHNER-LASER.COM



## *Infrared Laser Diode*

**ADL-80V03TL**

6-2D-LD80-010\_Rev.00

