




GNC-0100 2222 22: 1

Gigabit Fiber PCI Network Card, SFP

The LevelOne GNC-0100 Gigabit network card facilitates high-speed connectivity within a fiber-optic network. Wake-on-LAN functionality allows remote start-up and shutdown, while Interrupt Moderation technology delivers increased performance while reducing CPU load. The network card supports 32 bit PCI 1.0 and PCI 2.2 bus, as well as supporting multiple operating systems.

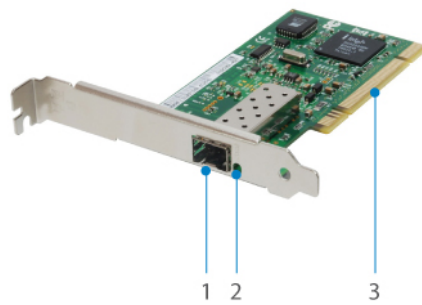

1. Fiber Ports
2. LED Indicator (Link / Activity)
3. PCI Slot

Key Features

- 2222 2222 22/2222 2 2 22 222 Wake-on-LAN 22
- Supports 32 bit PCI 1.0 and PCI 2.2 bus
- Supports remote management (WfM,RIS,SNMP/DMI)
- Supports most network operating systems (NOS)
- Interrupt Moderation: Delivers increased performance while significantly reducing CPU utilization



System Specifications

Standards & Protocols:

IEEE 802.3ab 1000BASE-T, Gigabit Ethernet
 IEEE 802.3x Flow Control (full-duplex flow control)
 IEEE 802.1Q Virtual LANs (VLANs)

Connectors and Cabling:

SFP Multi-Mode Fiber
 PCI 32bit Signaling (PCI 2.2 66MHz)

Indicator:

Link/Activity; Full-duplex Activity



Features

General:

Full-height and low profile, screw-on brackets included with each adapter, for installation in high-density 1U and 2U servers

Interrupt Moderation, Delivers increased performance while significantly reducing CPU utilization

Large Send Off-load/TCP Segmentation Off-load, which enables wire speed performance with low CPU utilization

Supply switch device for fault tolerance and checking, use for checking compliant, extent normal working time.

Management:

Wired for Management (WfM) Baseline v2.0 Enabled for Servers

DMI 2.0 Support, WMI & SNMP-manageable, Offline Diagnostics

Intel® Boot Agent, ACPI Power Management, Wake on LAN*

Performance

Data Transfer Rate:

1000Mbps fast ethernet ,Full duplex or half-duplex operation, reach 2000Mbps in full duplex

Environment

Temperature (°C):

Operating: 0°C ~ 50°C

Humidity (Non-condensing):

Operating: 5% ~ 90%

Physical Specifications

Dimensions (W x D x H mm):

165 x 57.5 X17mm

Weight (g):

60g

Others

Approval and Compliance:

FCC Class B; CE Mark; RoHS

Operation Systems:

Windows XP/ Vista

Windows Server 2000/2003/2008

Windows 98/98SE/NT4.0/NT

Windows CE/CE net5.0

Windows Server 2000

Microsoft Client for DOS

NetWare 5.0

OpenUNIX 8.0(Caldera)

UnixWare 7.x

Novell ODI

FreeBSD 4.7 to 5.x

Intended for 2.2 through 2.6.x kernels

☑Sun Solaris x86

Order Information

GNC-0100

Package Contents

GNC-0100

Low Profile Bracket

Quick Installation Guide

Resource CD (User Manual, Driver)

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.