

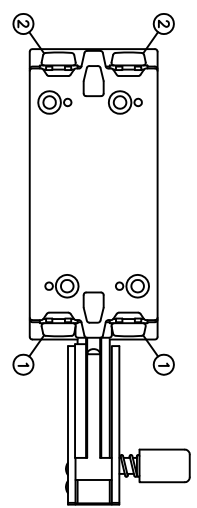



**COLORS**  
 BODY: Black  
 ACTUATOR: Black  
 LOCK: Black

**SPECIFICATIONS**  
 FUNCTION: 2P1T OFF-(ON)  
 RATINGS:  
 24A 125VAC  
 12A 250VAC  
 2HP 125/250VAC  
 OPERATING FORCE: 2.0kgf±0.5kgf at Highest Point  
 ELECTRICAL LIFE: 50,000 Cycles  
 TEMPERATURE: Operating: -20°C to 65°C

APPROVALS:  
**RoHS**  
 COMPLIANT

**MATERIALS**  
 LOWER BODY: Phenolic (FR), UL94 V-0  
 UPPER BODY: Polyamide 6/6 (PA66), UL94 V-0  
 ACTUATOR: Polyamide 6/6 (PA66), UL94 V-0  
 ACTUATOR RIVET: Copper  
 LOCK BUTTON: Polyamide 6/6 (PA66), UL94 V-0  
 LOCK SPRING: Steel  
 LOCK POST: Steel  
 ACTUATOR LINK: Polyamide 6/6 (PA66), UL94 V-0  
 PLATE: Polyamide 6/6 (PA66), UL94 V-0  
 SEAL: Nitrile Butadiene Rubber (NBR), UL94 V-0  
 CONTACT HOLDER: Polyamide 6/6 (PA66), UL94 V-0  
 MAIN SPRING: Steel  
 SLIDERS: Steel  
 MOBILE CONTACTS: Silver Plated Brass  
 CONTACT SPRINGS: Steel  
 CONTACTS: Silver Alloy Clad Copper  
 TERMINALS: Silver Plated Brass  
 TERMINAL SCREWS: Steel  
 TERMINAL HARDWARE: Steel  
 GREASE: Silicone Based Grease

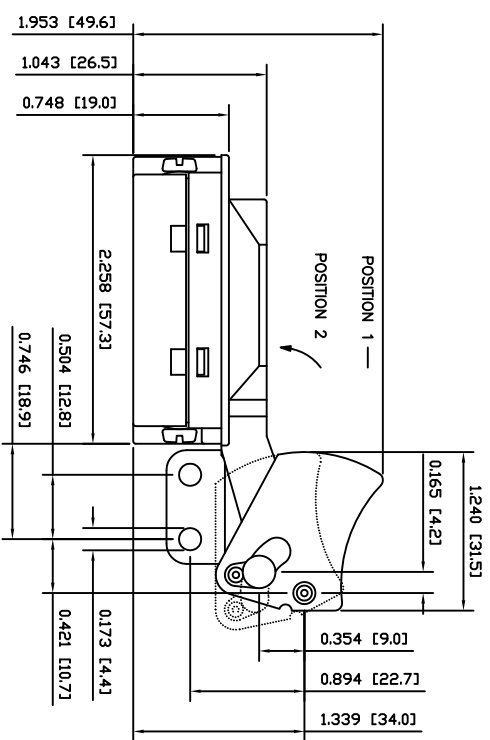

**E SWITCH**

**LAMB INDUSTRIES**

HY38-6E8-021-211

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED	REV. A	INITIAL RELEASE DESCRIPTION	21298 FOR	11/8/13 DATE	EPB DRAWN BY	SCALE DRAWING NOT TO SCALE	ITEM NUMBER 34-HY386EB021211	DATE NOVEMBER 8, 2013	REVISION A
--	--------	-----------------------------	-----------	--------------	--------------	----------------------------	------------------------------	-----------------------	------------