



YENYO

2A01G THRU 2A07G

Glass Passivated Standard Rectifier

Voltage Range 50 to 1000 V
Current 2.0 Ampere


Features

- * Low forward voltage drop
- * High current capability
- * Low reverse leakage current
- * High surge current capability

Mechanical Data

- * Case: Molded plastic DO-15
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solderable per MIL-STD-202 method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.4 gram

DO-15

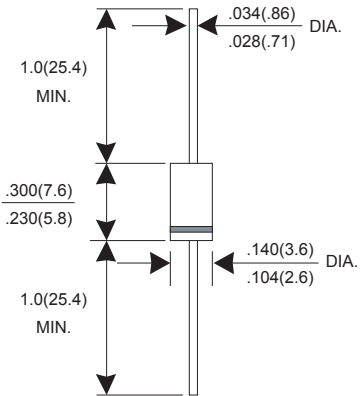

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

PARAMTER	SYMBOL	2A01G	2A02G	2A03G	2A04G	2A05G	2A06G	2A07G	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current $T_L=105^{\circ}C$	I(AV)	2.0							A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	60							A
Maximum Instantaneous Forward Voltage @ 2.0 A	VF	1.1							V
Maximum DC Reverse Current @ $T_J=25^{\circ}C$ At Rated DC Blocking Voltage @ $T_J=125^{\circ}C$	IR	5.0 100							uA uA
Typical junction Capacitance (Note 1)	CJ	20							pF
Maximum Thermal Resistance (Note 2)	RθJA	40							°C/W
Operating Junction and Storage Temperature Range	TJ, TSTG	-55 to +150							°C

NOTES : (1) Thermal Resistance junction to lead.
(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

RATINGS AND CHARACTERISTIC CURVES 2A01G THRU 2A07G

FIG.1 - FORWARD CURRENT DERATING CURVE

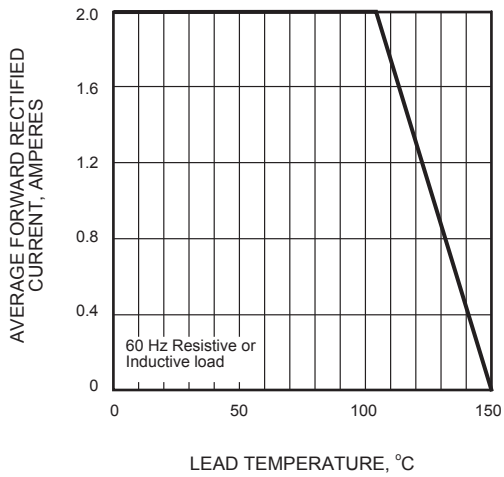


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

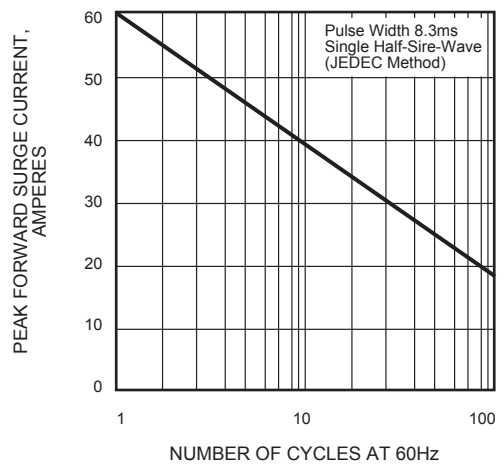


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

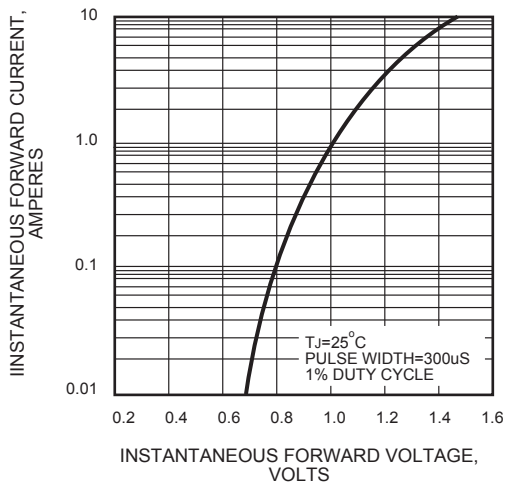


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

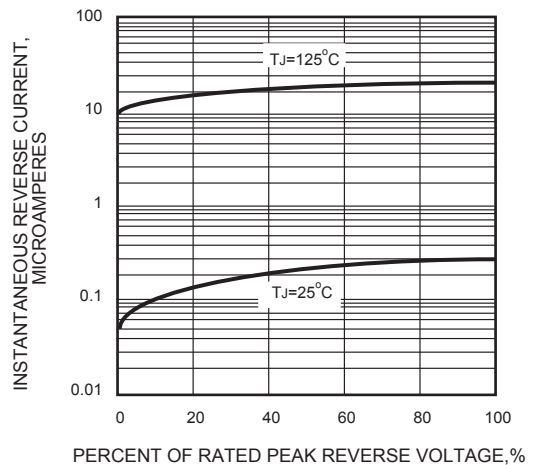


FIG.5 - TYPICAL JUNCTION CAPACITANCE

