
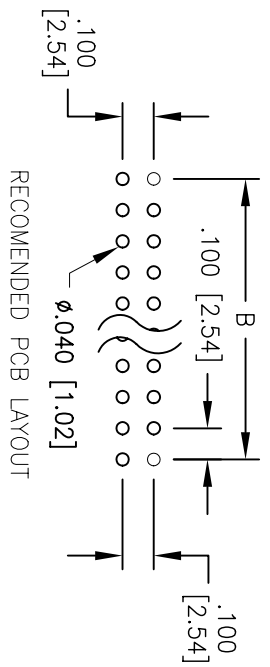
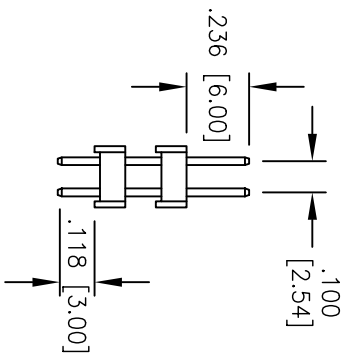
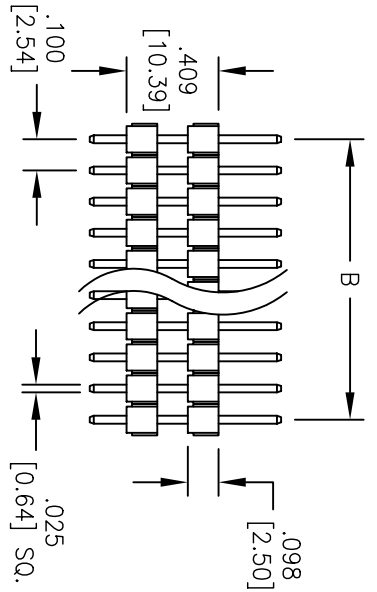


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/9/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

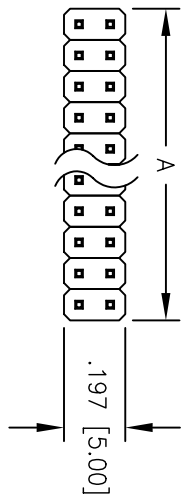

A = .100" [2.54] x No. of positions  
 B = .100" [2.54] x No. of spaces

**SPECIFICATIONS:**

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on PCB tails
- Electrical:
  - Operating voltage: 250 VAC max
  - Current rating: 3 Amp max
  - Contact resistance: 20 mohms max.
  - Insulation resistance: 5000 Mohms min @ 500 VDC
  - Dielectric withstanding voltage: 1000 VAC for 1 minute
  - Temperature Rating: Operating temperature: -55°C to +105°C

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STACKED PIN HEADER, .100 PITCH  
 DUAL ROW, PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN SS	9/9/04
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DPH-2-XX-SG-236/118/409	-
REF:	SCALE: NTS	SHEET 1 OF 1