

A

B

C


D

E


F

G

H

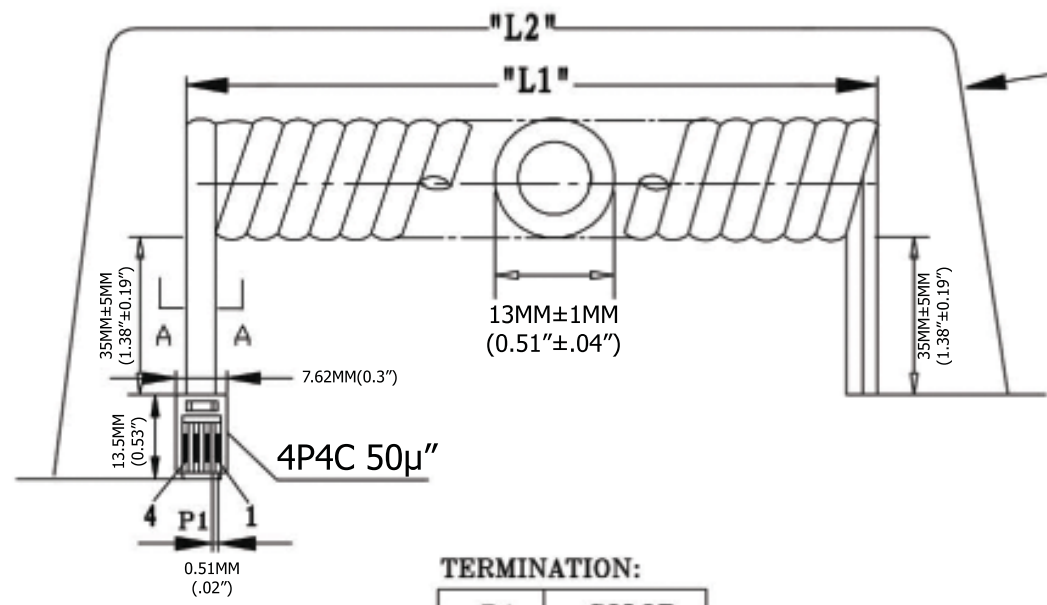

Extended length is with 500g of force

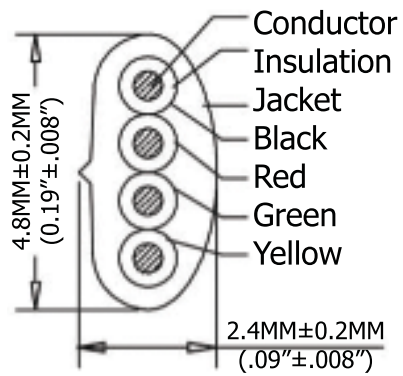

TERMINATION:

P1	COLOR
1	BLACK
2	RED
3	GREEN
4	YELLOW

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm [0.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	13.0 Inches
1,524.0MM-1,752.6MM	330.2MM

SEC:A-A



Scale	1:1							Name	Item No. AT-C-26-4/4/S-5-OE-R
TOLERANCE						Drawn	11.02.11	Chappell	
X.X	±0.40					Approved			Title NON-UL 26 AWG (0.12X12)*4C, O.D.: 2.4*4.8MM, Reverse Plug, 50µ" of contact plating, SILVER
X.XX	±0.25								
X.XXX	±0.15								
Angle	±3°								
									Drawing No.
									Replace
									Sheet



Modification Date Name

A

B

C

D

E

F

G

H