


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

2065-31-9

REVISIONS	
ISSUE	CHANGES
0	ER 39629 BAM 09/18/06

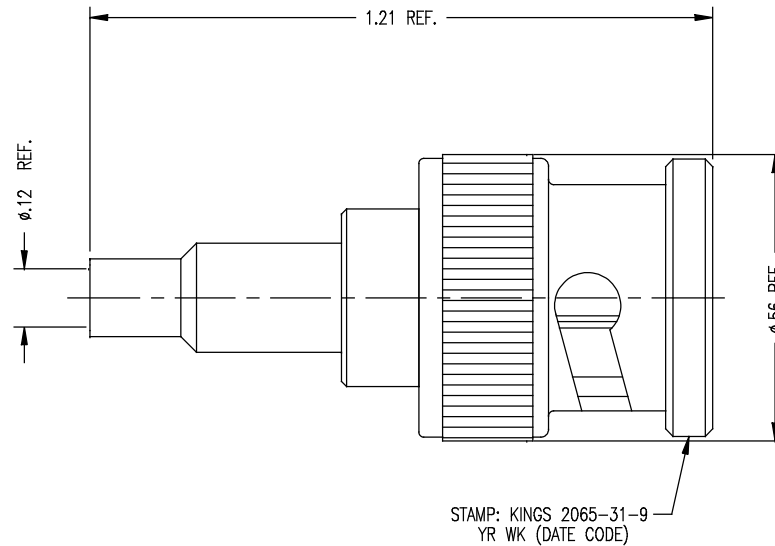

NOTES:

- FOR USE WITH MADISON RGBHV5P FOR HERMAN ELECTRONICS
- FOR CABLING INSTRUCTIONS SEE 3-764-1.
- FOR CRIMPING USE DIE KTH-2276.
- INTERFACE PER KINGS ES-17, FIG 2..
- MATERIALS:
 - INSULATOR-TEFLON, ASTM-D-4894
 - GASKET-SILICONE RUBBER, A-A-59588
 - SPRING WASHER } BER. COP., ASTM-B-196
 - OUTER CONTACT } BER. COP., ASTM-B-196
 - K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
 - ALL OTHER METAL PARTS-BRASS, ASTM-B16
- FINISHES:
 - CENTER CONTACTS-GOLD PLATE PER ASTM-B488
 - SPRING WASHER-SILVER PLATE PER ASTM-B700
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 75 OHMS
 - VOLTAGE RATING: 500 VRMS
 - FREQUENCY RANGE: DC TO 3 GHz

SCALE	4:1	
APPROX SURFACE AREA		
USED ON		
REF:	EQR 1082, ETR 2131	
PLUG, 75 BNC		
DRAWN	BAM	DATE 9/12/6
DESIGN	BAM	DATE 9/12/6
APPR.		DATE
 KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730		
2065-31-9		

GSD