

1

2

3




4

5

6

7

A

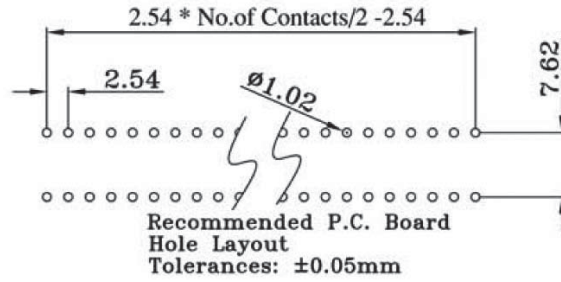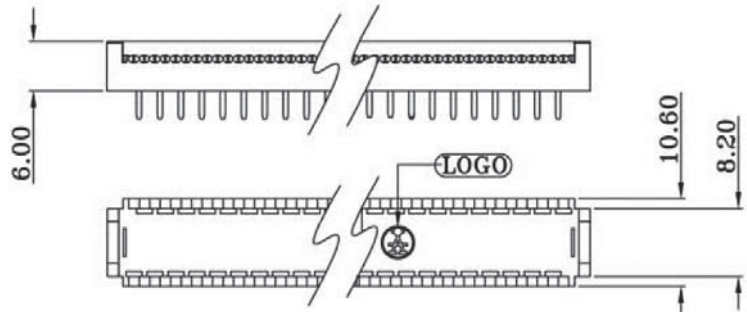



A

B

B

C

C


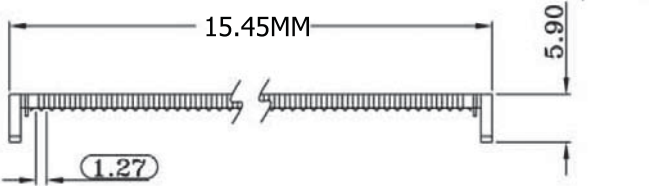


Materials:

- Insulator: P.B.T. 30%Glass Fiber, UL94V-0
- Contacts: Brass, Gold Flash over Nickel
- Contact Plating: Flash Gold Selective, 10µ" or 30µ" of Gold

D

D

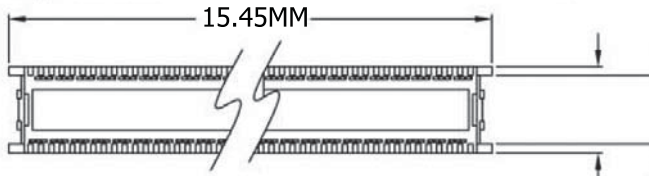

Electrical:


- Current Rating: 1AMP
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C

E

E


F

F

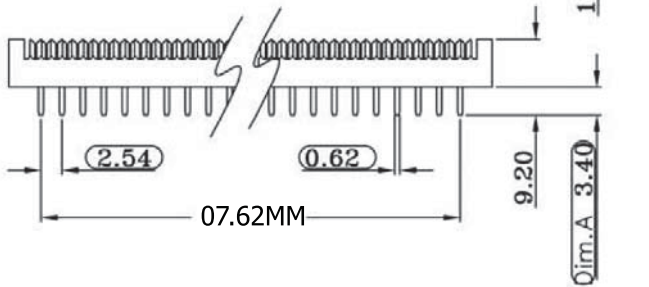

G

G



Unit: mm



Scale	1:1					Date	Name	Title DIP connector - 18 contact 2.54 x 7.62mm pitch, Gold flash
TOLERANCE						Drawn	28.10.11	
X.X	±0.40					Approved		ASSMANN WSW-No.
X.XX	±0.25							ADIP18-G-LC
X.XXX	±0.15							Drawing-No.
DIM	TOL							rev00
X.°	±3°							Replace
X.X°	±X°							1/1
Angle	TOL	Id.	Modification	Date	Name			

1

2

3

4

5

6

7