

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/17/08	

6

5

4




3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

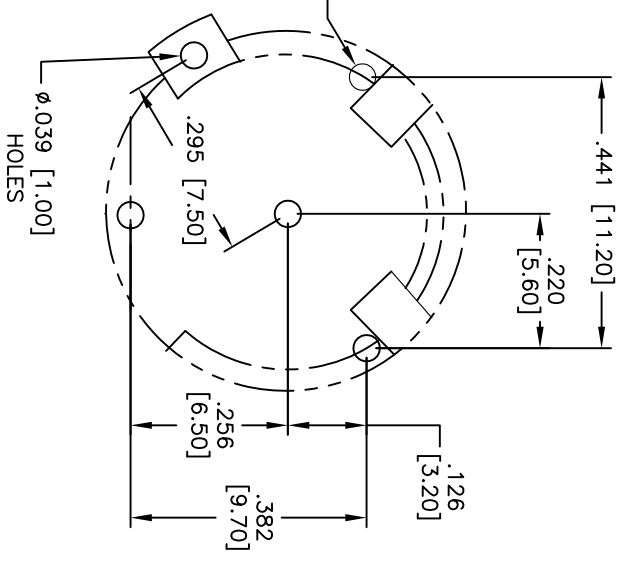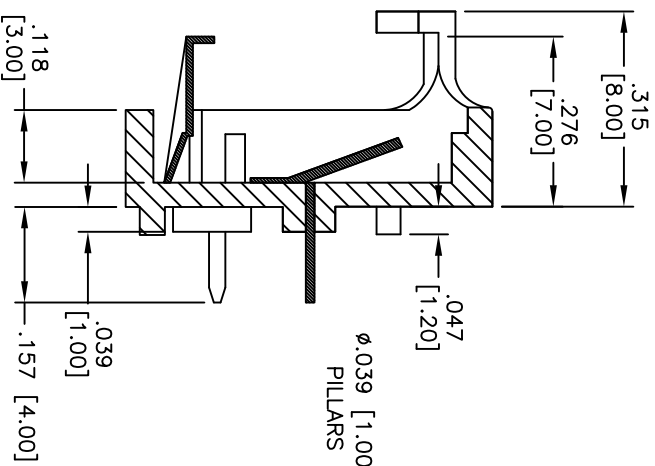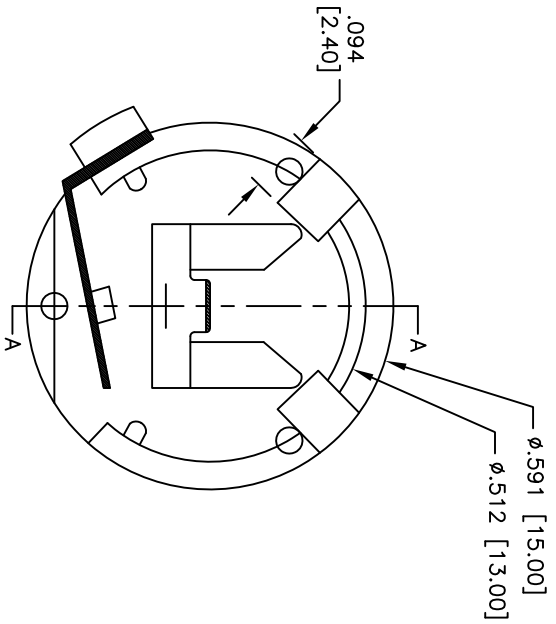

SEC A-A

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black
Contacts: Phosphor Bronze

Plating: Tin over Nickel underplate overall
Electrical: Current rating: 2A (AC/DC)

Voltage rating: 500V (AC/DC)
Contact resistance: 30 mohms max

Insulation resistance: 500 MEGAOHMS
Temperature Rating: Operating temperature: -55°C to +85°C

Environmental: Lead free, ROHS compliant
Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: COIN CELL BATTERY HOLDER, BR1225
PCB MOUNT

SIZE	PART NO.	REV.
X	BH-41B-1	-
REF:	S00021T	SCALE: NTS
		SHEET 1 OF 1

A

B

C

D

A

B

C

D

6

5

4

3

2

1