



Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

UDZS3.6B
THRU
UDZS36B

200 mW
Zener Diode
3.6 to 36 Volts

Features

- Saving space
Very tight tolerance on zener breakdown voltage
Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
Moisture Sensitivity Level 1

Absolute Maximum Ratings

Table with 4 columns: Symbol, Parameter, Rating, Unit. Rows include Power dissipation (200 mW), Junction Temperature (150 °C), and Storage Temperature Range (-55 to +150 °C).

Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 7(C)-I.

DO-35

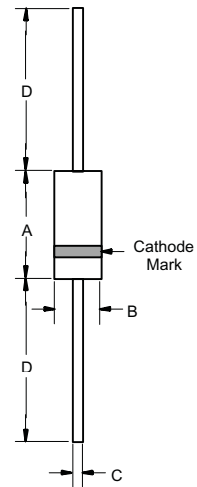


Table titled DIMENSIONS with columns for DIM, INCHES (MIN, MAX), MM (MIN, MAX), and NOTE. Rows A, B, C, and D provide specific dimension values.

UDZS3.6B THRU UDZS36B

Electrical Characteristics

 T_j=25°C







Type Number	Zener voltage range ¹⁾			Maximum zener Impedance ²⁾			Reverse current ¹⁾	
	V _Z (V) @ I _{ZT}	I _{ZT}	Z _{ZT}	Z _{ZK}	I _{ZK}	I _R	V _R	
	Min.	Max.	mA	Ω		mA	μA	V
UDZS3.6B	3.60	3.845	5	100	1000	1.0	10	1.0
UDZS3.9B	3.89	4.16	5	100	1000	1.0	5	1.0
UDZS4.3B	4.17	4.43	5	100	1000	1.0	5	1.0
UDZS4.7B	4.55	4.75	5	100	800	0.5	2	1.0
UDZS5.1B	4.98	5.20	5	80	500	0.5	2	1.5
UDZS5.6B	5.49	5.73	5	60	200	0.5	1	2.5
UDZS6.2B	6.06	6.33	5	60	100	0.5	1	3.0
UDZS6.8B	6.65	6.93	5	40	60	0.5	0.5	3.5
UDZS7.5B	7.28	7.60	5	30	60	0.5	0.5	4.0
UDZS8.2B	8.02	8.36	5	30	60	0.5	0.5	5.0
UDZS9.1B	8.85	9.23	5	30	60	0.5	0.5	6.0
UDZS10B	9.77	10.21	5	30	60	0.5	0.1	7.0
UDZS11B	10.76	11.22	5	30	60	0.5	0.1	8.0
UDZS12B	11.74	12.24	5	30	80	0.5	0.1	9.0
UDZS13B	12.91	13.49	5	37	80	0.5	0.1	10
UDZS15B	14.34	14.98	5	42	80	0.5	0.1	11
UDZS16B	15.85	16.51	5	50	80	0.5	0.1	12
UDZS18B	17.56	18.35	5	65	80	0.5	0.1	13
UDZS20B	19.52	20.39	5	85	100	0.5	0.1	15
UDZS22B	21.54	22.47	5	100	100	0.5	0.1	17
UDZS24B	23.72	24.78	5	120	120	0.5	0.1	19
UDZS27B	26.19	27.53	5	150	150	0.5	0.1	21
UDZS30B	29.19	30.69	5	200	200	0.5	0.1	23
UDZS33B	32.15	33.79	5	250	250	0.5	0.1	25
UDZS36B	35.07	36.87	5	300	300	0.5	0.1	27

1) Short duration test pulse used to minimize self-heating effect

 2) The zener impedance (Z_{ZT}, Z_{ZK}) are measure by superimposing a minute alternating current on the regulated current(I_Z)







UDZS3.6B THRU UDZS36B

Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

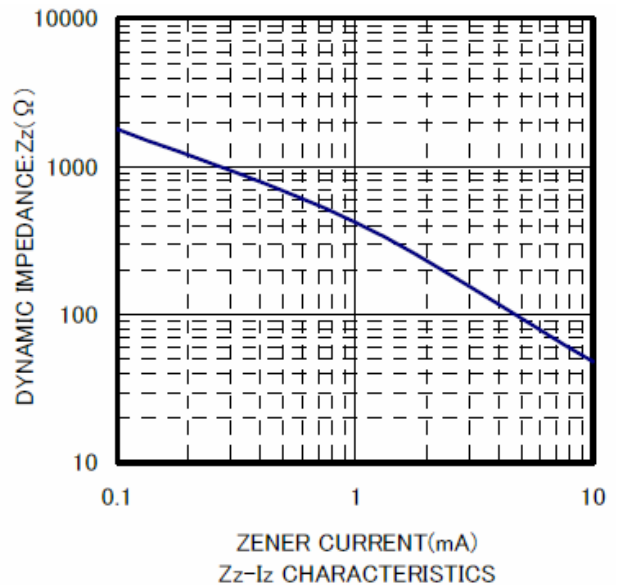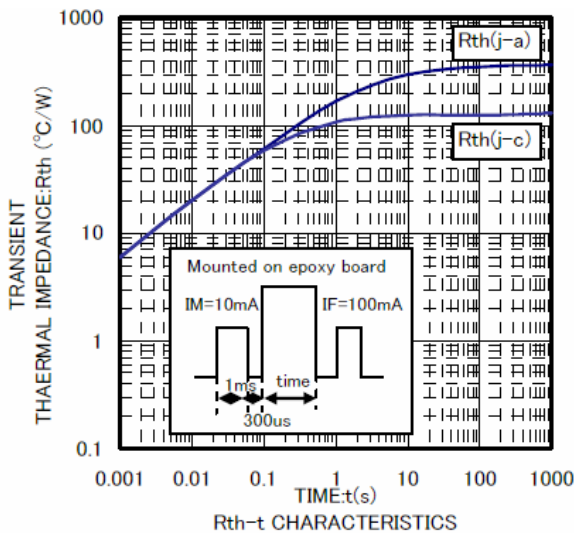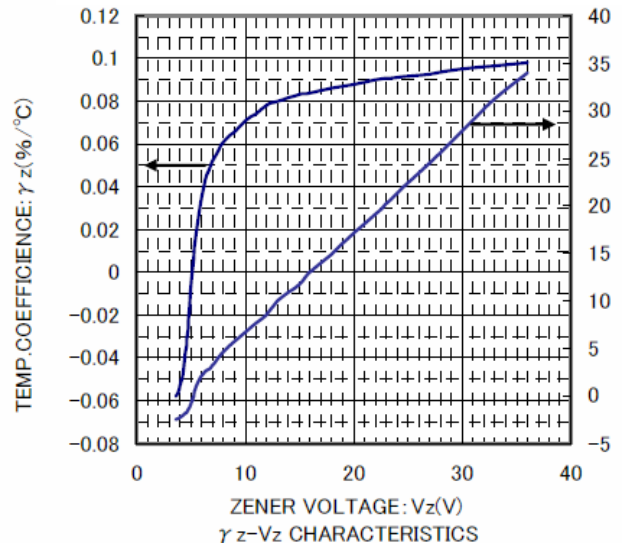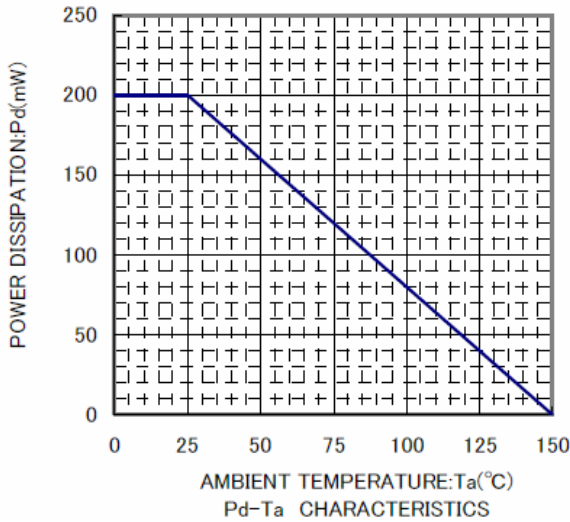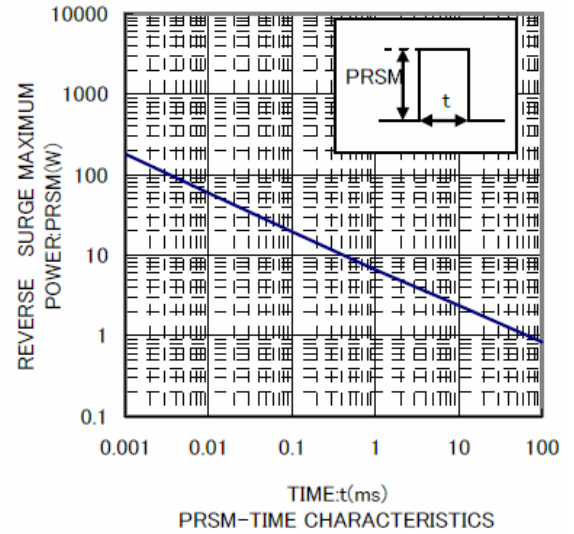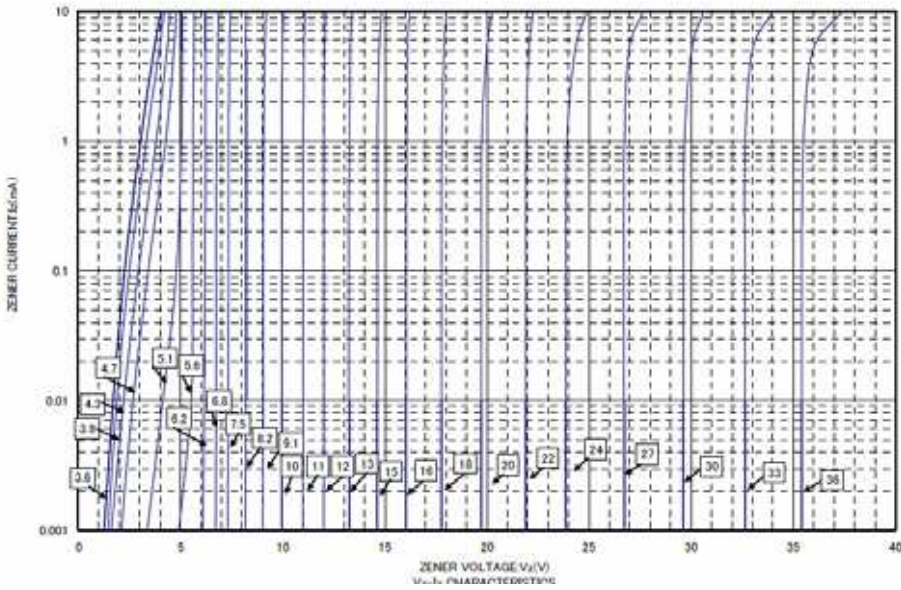

UDZS3.6B THRU UDZS36B

Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

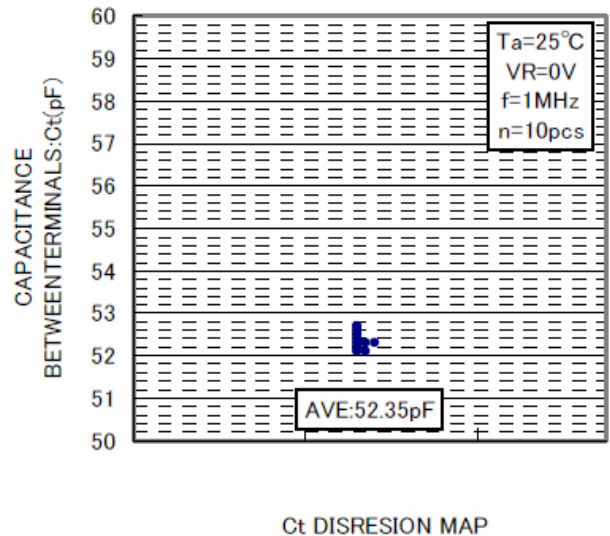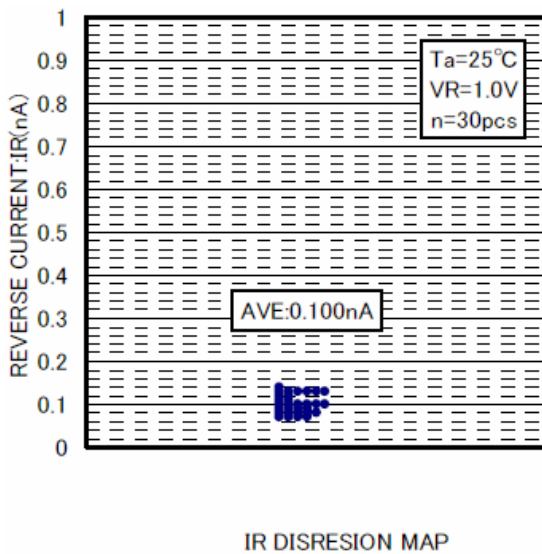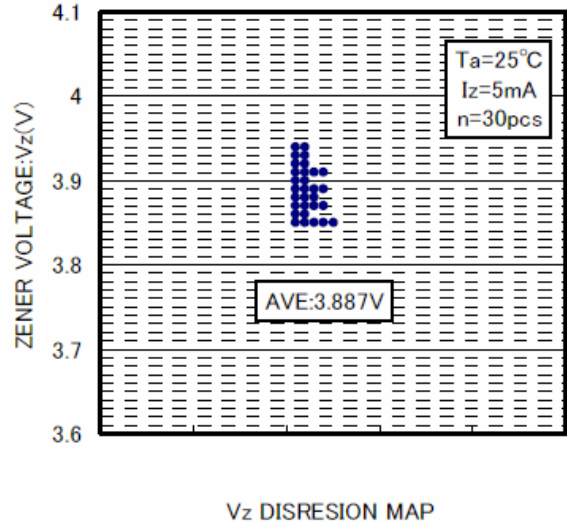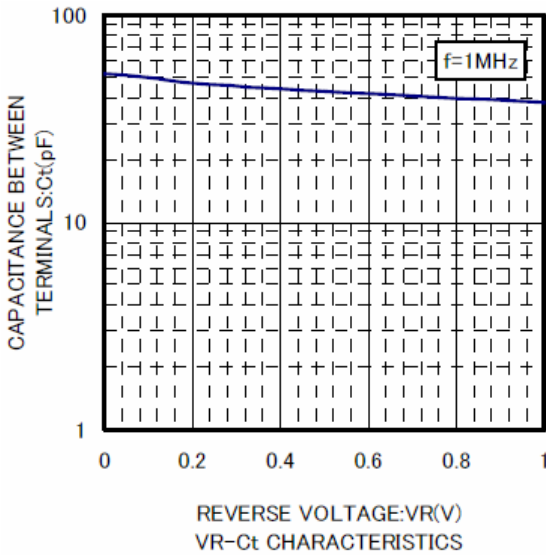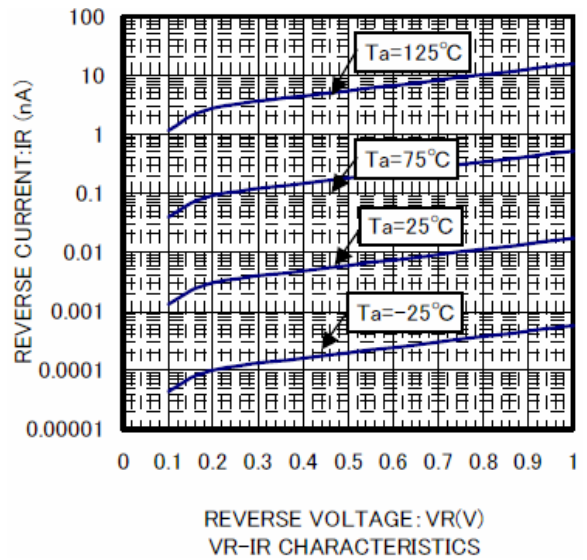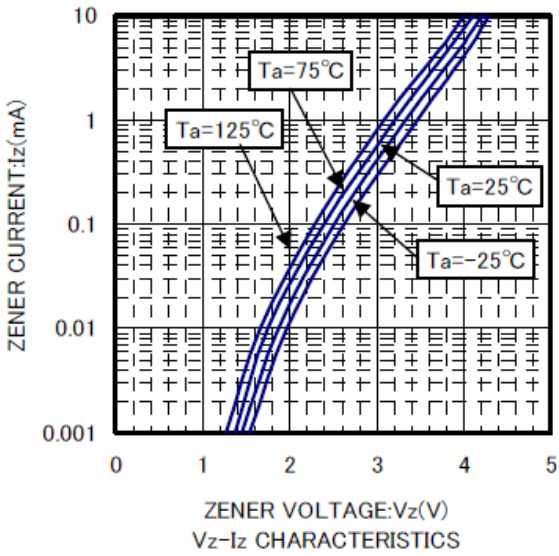



Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 10Kpcs/Reel
Part Number-AP	Ammo Packing: 5Kpcs/Ammo Box
Part Number-BP	Bulk: 500Kpcs/Carton

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com